


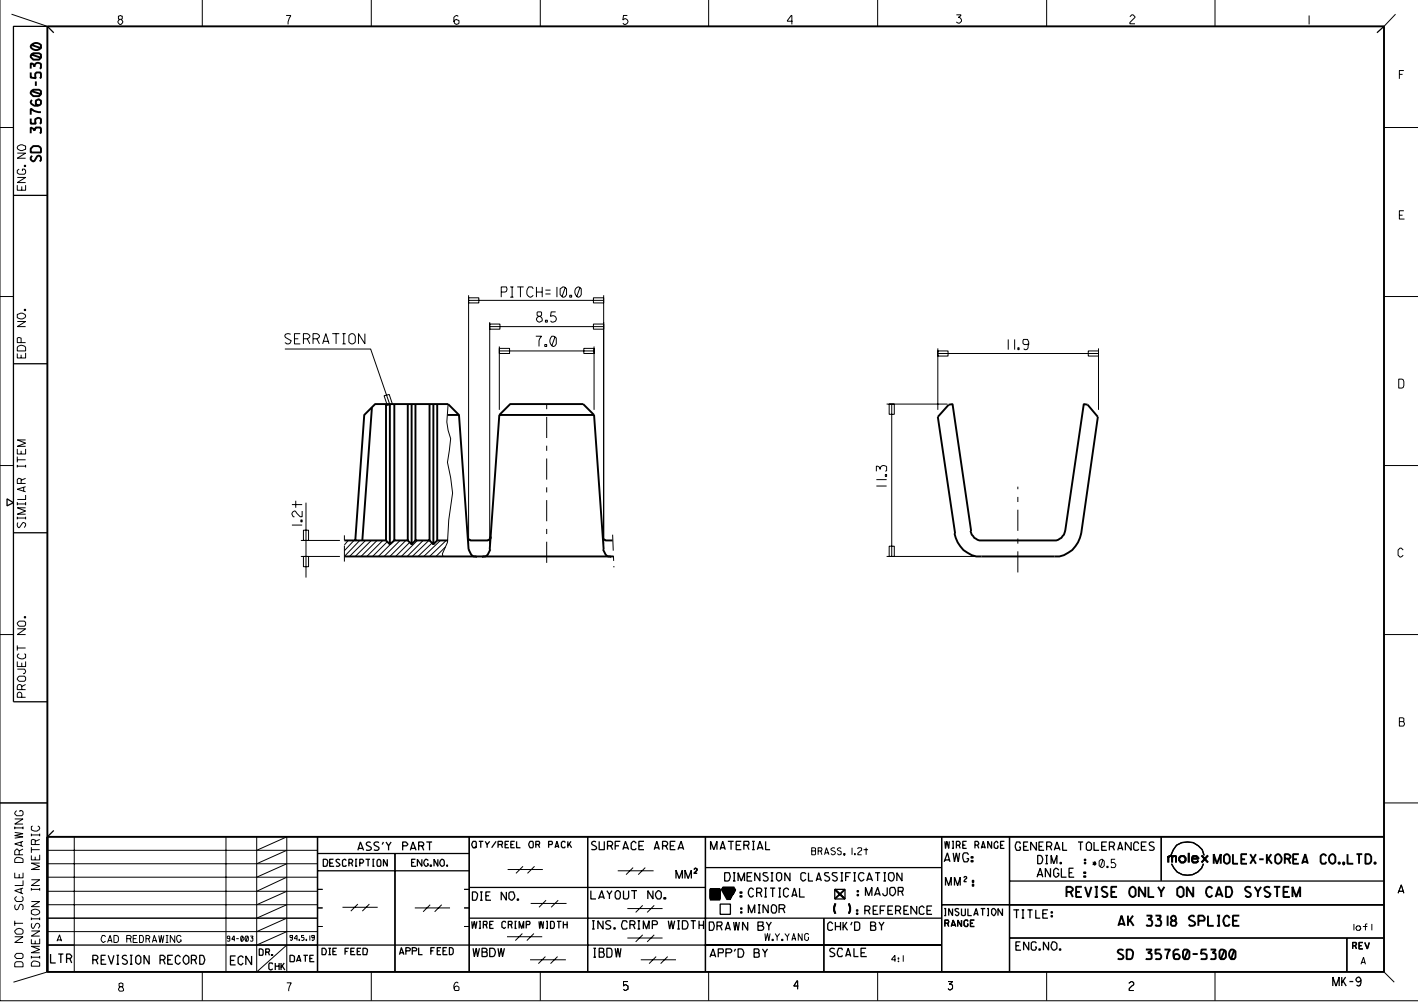

Technical drawing of a wire crimp connector. The drawing includes a side view of the crimped wire with dimensions: PITCH=10.0, 8.5, 7.0, and a serration detail. A cross-sectional view shows a U-shaped crimp with dimensions 11.3 and 11.9. Below the drawing is a table with fields for ASS'Y PART, QTY/REEL OR PACK, SURFACE AREA, MATERIAL, DIMENSION CLASSIFICATION, WIRE RANGE, GENERAL TOLERANCES, and a revision record. The title is 'AK 3318 SPLICE' and the drawing number is 'SD 35760-5300'.

ASS'Y PART		QTY/REEL OR PACK	SURFACE AREA	MATERIAL	WIRE RANGE	GENERAL TOLERANCES	MOLEX-KOREA CO.,LTD.
DESCRIPTION	ENG.NO.		MM ²		AWG:	DIM. ANGLE	
				BRASS, 1.2t	MM ² :	± 0.5	
				DIMENSION CLASSIFICATION			
				■ : CRITICAL	☒ : MAJOR		
				□ : MINOR	() : REFERENCE		
				DRAWN BY	CHK'D BY	TITLE:	
				W.Y. YANG		AK 3318 SPLICE	
				APP'D BY	SCALE	ENG.NO.	
					4:1	SD 35760-5300	

REVISION RECORD		ECN	DATE	DIE FEED	APPL FEED	WBDW	18DW	APP'D BY	SCALE
A	CAD REDRAWING	34-003	34.5.19						