



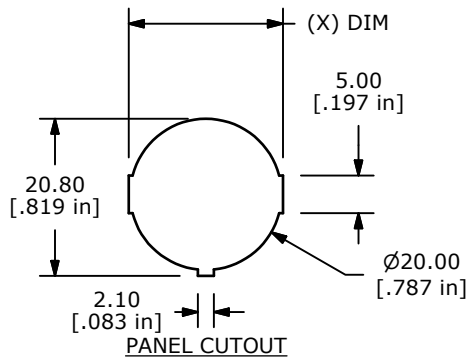

| PANEL THICKNESS | (X) DIM. |
|-----------------|----------|
| 0.75 TO 1.25    | 20.2mm   |
| 1.25 TO 2.00    | 20.4mm   |
| 2.00 TO 3.00    | 20.6mm   |


| SWITCH FUNCTION |        |
|-----------------|--------|
| POS. 1          | POS. 2 |
|                 |        |
| OFF             | ON     |
| OPEN            | 1-1a   |




## NOTE:

- DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4  
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF ONLY
- CONTACT MATERIAL: SILVER
- ▲ 5. CONTACT RATING: 16A 125VAC [UL, cUL]  
10A 250VAC [UL, cUL]  
1/3HP 125/250VAC [UL, cUL]  
10(4)A 250V~1E4 T125/55 [VDE]  
10(2)A 250V~5E4 T185/55 [VDE]
- CONTACT RESISTANCE: 35mΩ MAX. @ 50VAC
- INSULATION RESISTANCE: 100MΩ MIN. @ 500VAC
- DIELECTRIC STRENGTH: 1,500VAC FOR 1 MINUTE
- ELECTRICAL LIFE: 6,000 CYCLES [UR, cUR]  
10,000 CYCLES [ENEC14, SEMKO: 10(4)A 250V~]
- OPERATING TEMPERATURE: -20°C TO 105°C [UR, cUR]  
-20°C TO 125°C [ENEC14, SEMKO]
- ▲ DENOTES CRITICAL PARAMETER
- 2002/95/EC (ROHS) COMPLIANT
- LENS COLOR, GREEN
- LAMP VOLTAGE, 250V



Ø23.00  
[.906 in]

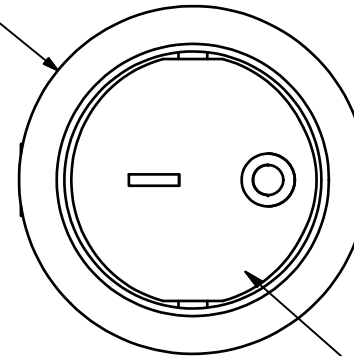

ACTUATOR COLOR:  
GREEN

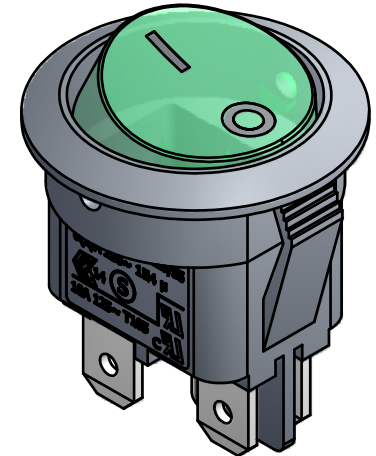

▲ BODY COLOR:  
BLACK

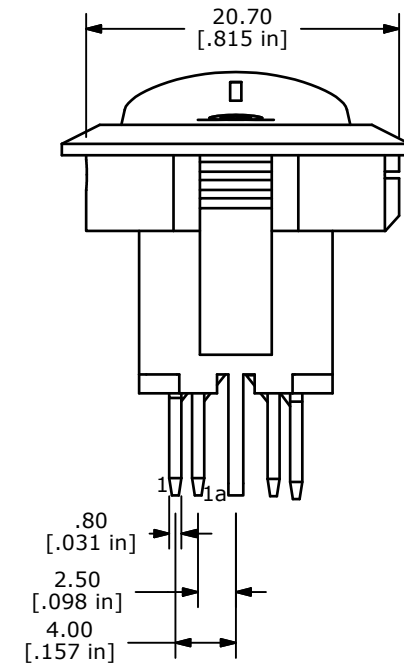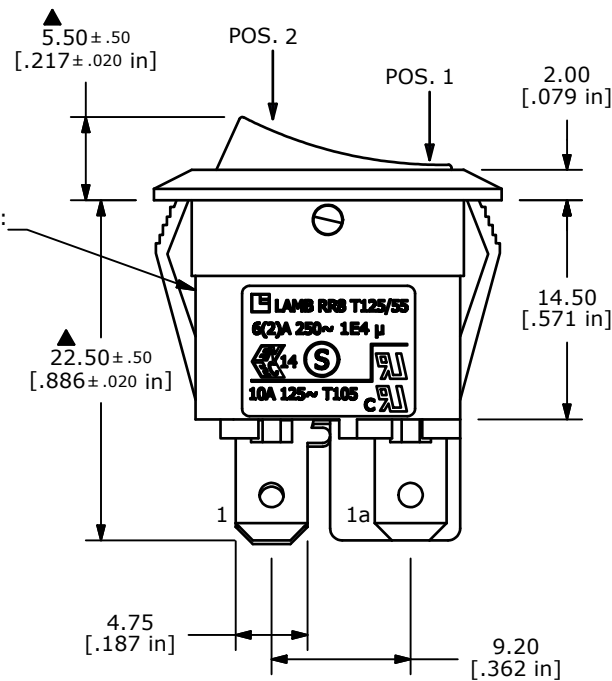

TITLE RR812C1011137

|     |        |                       |          |    |
|-----|--------|-----------------------|----------|----|
| C   | 20524  | CONVERTED TO INVENTOR | 3/8/2012 | MM |
| REV | PCR NO | DESCRIPTION           | DATE     | BY |

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY  
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

|              |                  |           |                         |          |
|--------------|------------------|-----------|-------------------------|----------|
| SCALE<br>2:1 | DATE<br>3/8/2012 | DR<br>BGL | DWG<br>38-RR812C1011137 | REV<br>C |
|--------------|------------------|-----------|-------------------------|----------|