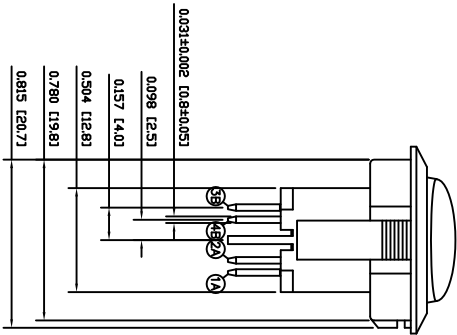
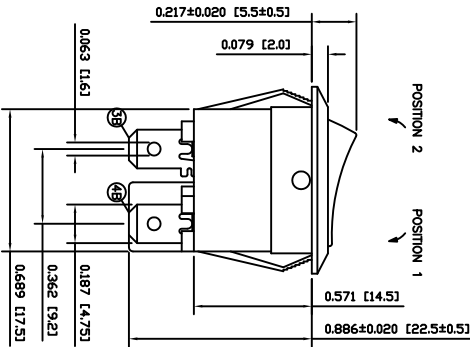



SCHMATIC

SPECIFICATIONS

FUNCTION:
2P1T OFF-ON

RATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
16A 125VAC [UR, CLR]
10A 250VAC [UR, CLR]
1/3HP 125/250VAC [UR, CLR]

EN 61058-1:2002:
10(4)A 250V~ μ 1E4 1125/55 [ENEC14, SEMKO]
10(2)A 250V~ μ 5E4 185/55 [ENEC14, SEMKO]

CONTACT RESISTANCE:
Initial: 35m Ω Max. at 50VAC

INSULATION RESISTANCE:
100M Ω Min. at 500VDC

DIELECTRIC STRENGTH:
1,500VAC for 1 minute

ELECTRICAL LIFE:
6,000 Cycles [UR, CLR]
10,000 Cycles [ENEC14, SEMKO: 10(4)A 250V~]
50,000 Cycles [ENEC14, SEMKO: 10(2)A 250V~]

TEMPERATURE:
Operating: -20°C to 105°C [UR, CLR]
Operating: -20°C to 125°C [ENEC14, SEMKO: 10(4)A 250V~]
Operating: -20°C to 85°C [ENEC14, SEMKO: 10(2)A 250V~]

APPROVALS:

COMPLIANT

COLORS AND MARKINGS

BODY:
Block

ACTUATOR:
Block

MARKINGS:
None

MARKING COLOR:
None

MATERIALS

BODY:
Polyamide 6/6 (PA66), UL94 V-2


ACTUATOR:
Polyamide 6/6 (PA66), UL94 V-2

MOBILE CONTACT:
Silver Plated Copper

CONTACTS:
Silver Alloy

TERMINALS:
Silver Plated Copper
Silver Plated Brass

SUGGESTED PANEL CUTOUT



PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	0.795 [20.2]
0.049~0.079 [1.25~2.00]	0.803 [20.4]
0.079~0.118 [2.00~3.00]	0.811 [20.6]

ACTUATOR	A	09/08/11	CAB
BODY	B	11/10/04	BMA
COLORS	A	09/08/11	CAB
MATERIALS	A	09/08/11	BMA
SPECIFICATIONS	B	11/10/04	CAB
REFERENCE	REV.	DATE	BY

1	2	3

4	5	6

7	8

RR812C1100

DRAWING NUMBER	DATE	REVISION
39-RR812C1100	AUGUST 11, 2009	B