



Top and side entry hoods with short screws

Identification No. of contacts Part No. Drawing Dimensions in mm

Top and side entry hood Black thermoplastic

9 ¹⁾	09 67 009 046 .
15	09 67 015 046 .
25	09 67 025 046 .
37	09 67 037 046 .

Please insert digit for screw option

- Short screw, thread 4-40 UNC ▶ 3
- Short screw, thread M3 ▶ 2

Top and side entry hood Metallized thermoplastic

9 ¹⁾	09 67 009 046 .
15	09 67 015 046 .
25	09 67 025 046 .
37	09 67 037 046 .

Please insert digit for screw option

- Short screw, thread 4-40 UNC ▶ 5
- Short screw, thread M3 ▶ 4

Spares

Knurled screw, thread 4-40 UNC

9-25	09 67 002 9081
------	----------------

Insert for metallized hoods

9-15	09 67 002 9103
25-37	09 67 002 9105

Cable clamp

9-15	09 67 002 9104
25-37	09 67 002 9106

Cable clamp screw


9-37	09 67 002 9102
------	----------------

Grommet for black thermoplastic hood





09 67 001 9968

for metallized hood

09 67 002 9075

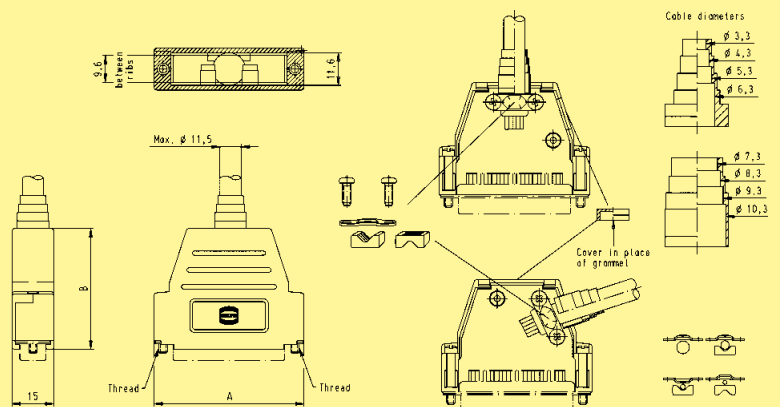

	A	B
9	31.5	40
15	40.0	40
25	53.5	43
37	71.3	40



max. Ø	
... 9968	... 9075
3.3	3.5
4.3	4.5
5.3	5.5
6.3	6.5

max. Ø	
... 9968	... 9075
7.3	7.5
8.3	8.5
9.3	9.5
10.3	10.5

¹⁾ 9-pole hood provided with only one screw on the opposite side of the cable entry.
Operating temperature for all hoods on this page: -55 °C ... +110 °C