
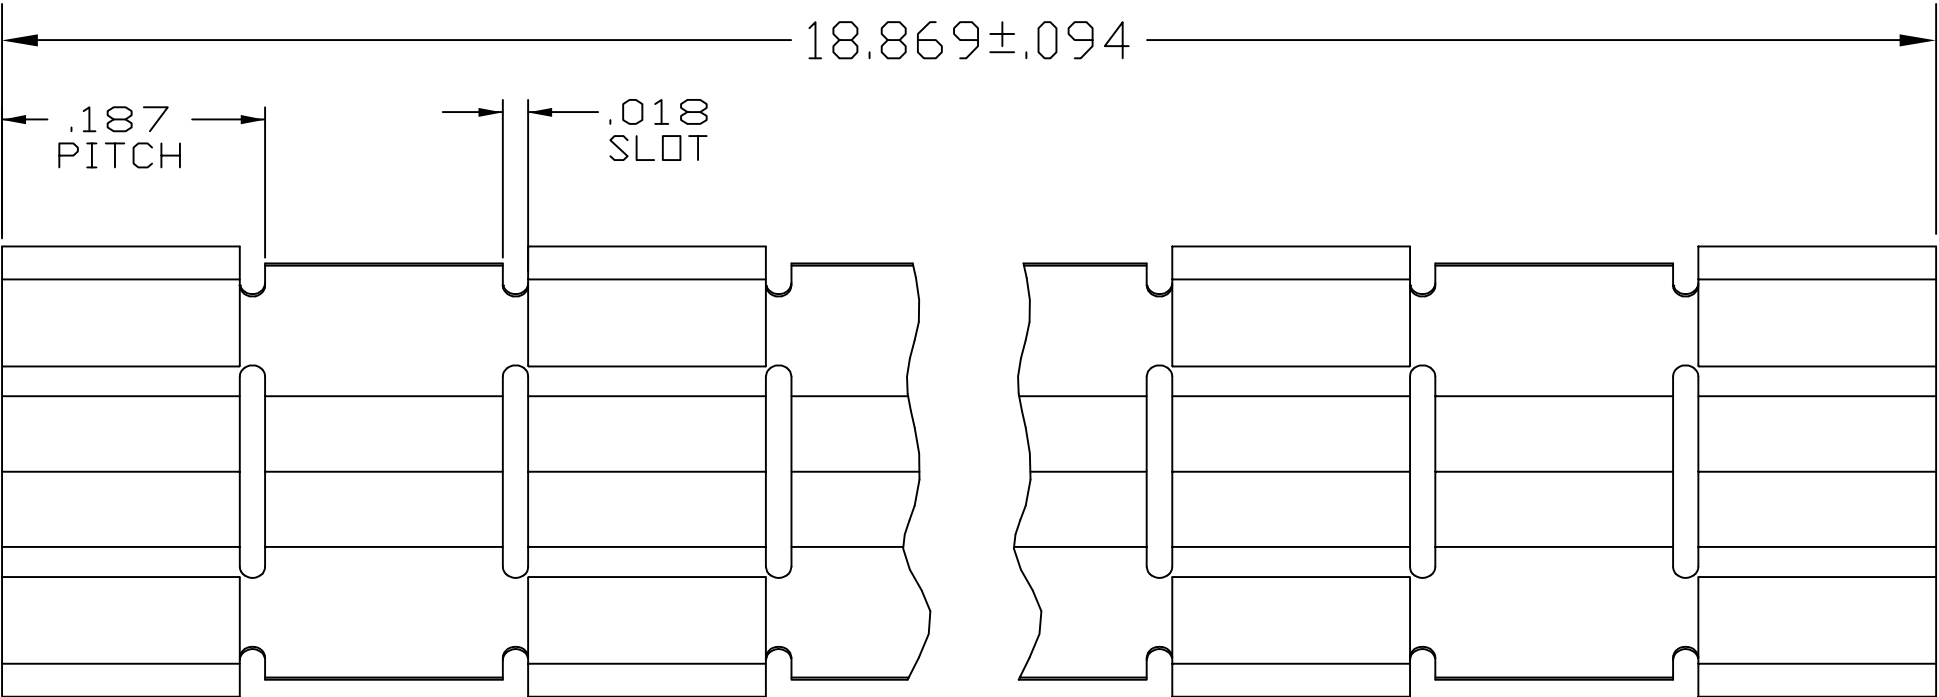
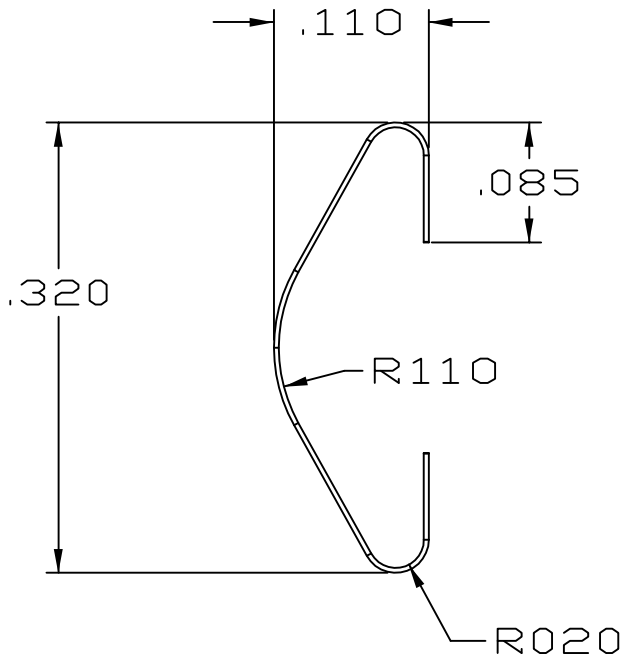



THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO LAIRD TECHNOLOGIES.
IT MAY NOT BE DISCLOSED TO ANYONE, OTHER THAN LAIRD TECHNOLOGIES
PERSONNEL, WITHOUT WRITTEN AUTHORIZATION FROM LAIRD TECHNOLOGIES.

DWG. NO.
3910-0012-00

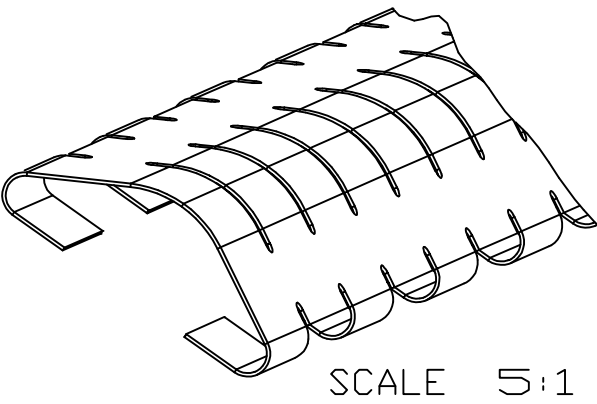

B

DWG. NO.
3910-0012-00

MATERIAL: .0035 THICK BeCu ALLOY 25 1/4 HARD		TOLERANCES NOT SHOWN			DRAWN BY:	DATE:
		DECIMAL 2 PL'S ± .020			JNS	03/19/03
		DECIMAL 3 PL'S ± .015			CHECKED BY:	DATE:
HEAT TREATED: TO DPH 373 MINIMUM USING A 500 GRAM LOAD		ANGULAR ± 3°	RKM		04/10/03	
		THIRD ANGLE PROJECTION 		APPROVED BY:	DATE:	
THICKNESS AFTER: ULTRASOFT AND BEFORE PLATING: .002±.0002				JNS	04/10/03	
		INFINERA				
FINISH: ZINC PLUS CLEAR CHROMATE .0001-.0003		UNITS:	INCH [MM]	SCALE:	REF. DWG NO.	
				7:1	0078-0056	
CAD MAINTAINED DRAWING. MANUAL CHANGES UNAUTHORIZED.				DWG. NO.		SUB
				3910-0012-00		01