

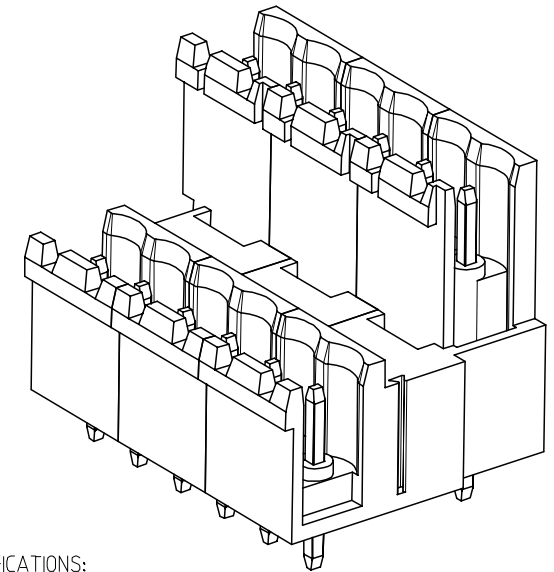
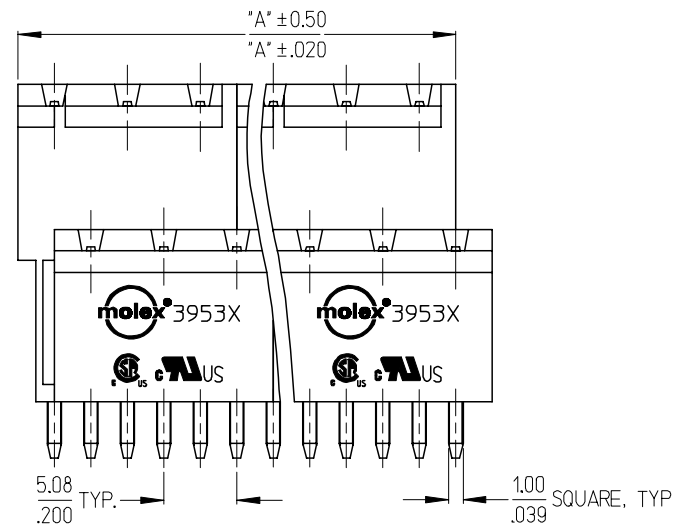
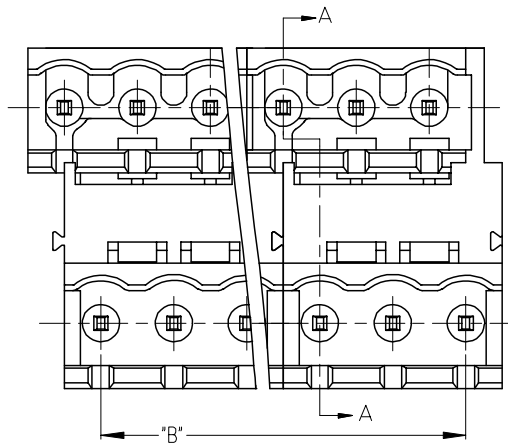


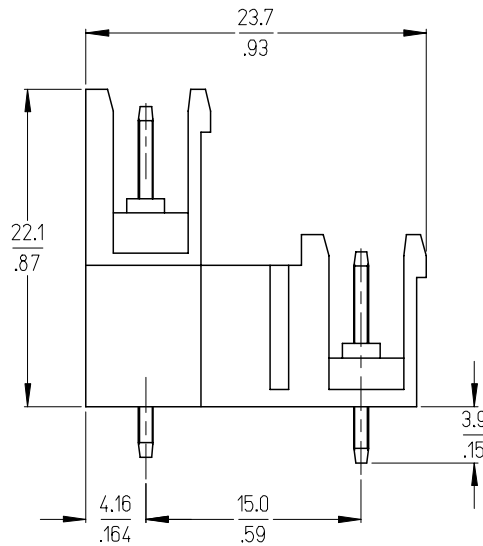

SPECIFICATIONS:

1. MATERIAL:
 - (1) BODY: PA66 (UL 94V-0).
 - (2) COVER: PBT (UL 94V-0).
 - (3) LONG TERMINAL: BRASS.
 - (4) SHORT TERMINAL: BRASS.
2. ELECTRICAL RATING: 300V, 15A.
3. DIELECTRIC WITHSTAND: AC 2500V FOR 1 MINUTE.
4. BREAKDOWN VOLTAGE: 4000V.
5. INSULATION RESISTANCE: DC 1000V, 1000 MEGOHMS.
6. OPERATING TEMPERATURE: -40°C TO $+105^{\circ}\text{C}$.
7. NUMBER OF CIRCUIT POSITIONS AVAILABLE = 4 THROUGH 48, EVEN NUMBERED CIRCUIT SIZES ONLY.
8. ALL COMPONENTS ARE ROHS COMPLIANT.

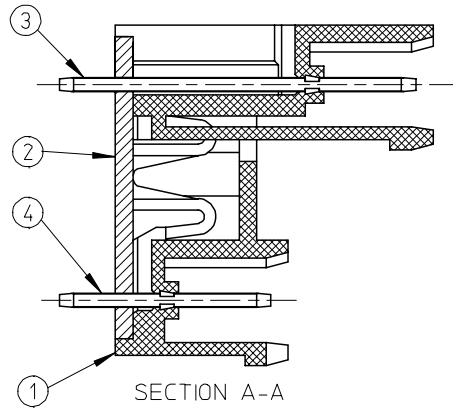

INITIAL RELEASE EC NO: ETC2007-0020 DRWN: CYORK 2006/07/25 CHKD: JPWLICKI 2006/07/25 APPR: JPWLICKI 2006/07/26 A REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 3:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION			
		 =0  =0			DRAWN BY	DATE	TITLE 5.08MM, EURO DUAL HEADER VERTICAL, OPEN END, STACKABLE					
					C. YORK	2006/07/24						
					CHECKED BY	DATE						
					J. PAWLICKI	2006/07/24						
					APPROVED BY	DATE						
				J. PAWLICKI	2006/07/24	 MOLEX INCORPORATED						
				MATERIAL NO.						DOCUMENT NO.		SHEET NO.
				SEE SHT. 2						SD-39538-003		1 OF 2
				SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
		B										

