MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY - PUSHBUTTON SWITCH

CATALOG LISTING
3PB715-T2

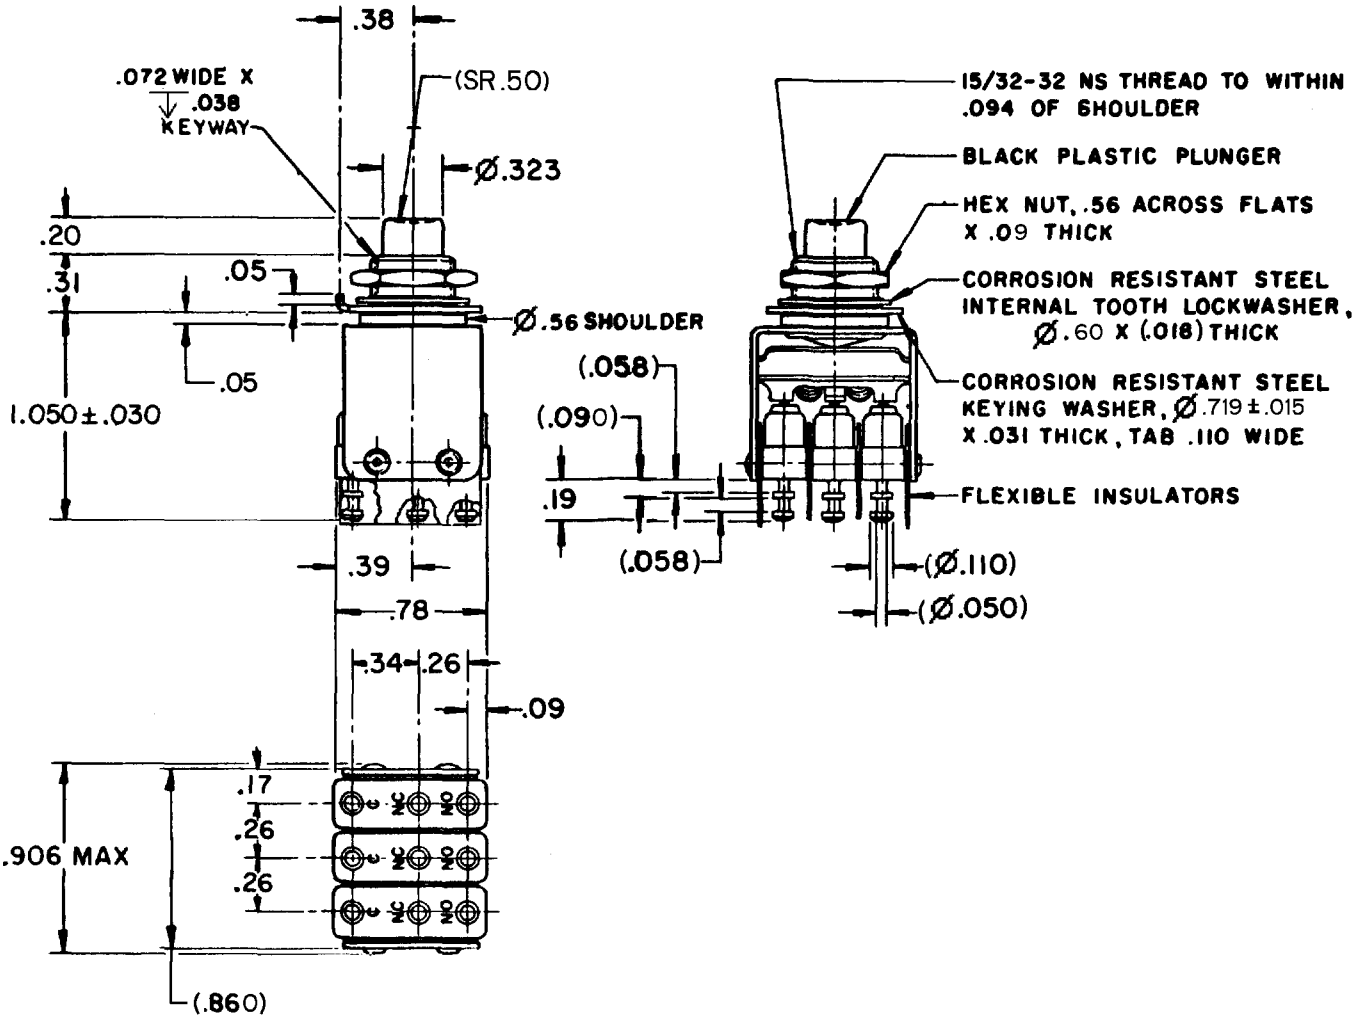

NOTES
1 - UNIT INCLUDES 3X "21SM" TYPE BASIC SWITCH
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH. A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE --- 35 OZ APPROX
TOTAL TRAVEL ----- .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
3X S P D T

250 VAC ---------- 5 AMP

30 VOLTS DC RATING

INDUCTIVE ---- SEA LEVEL --- 3 AMP
50,000 FT -- 2.5 AMP

RESISTIVE ---- SEA LEVEL --- 5 AMP
50,000 FT --- 5 AMP

MAXIMUM INRUSH ------- 24 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS: SI METRIC ☐ US CUSTOMARY ☒

WEIGHT

CATALOG LISTING 3PB715-T2 PAGE 1 OF 1
RELEASE NO. PR-4647
DRAWING NUMBER M
ISSUE X Ø 8

REVISIONS

A	PR 4647	JAL 6 JAN 75	
B	CO-93593	PPF 27 OCT 98	
C	CO-94273	GJW 5 APR 99	
D	REINST PR-24276	GJW 19 OCT 99	

REPLACES
CHECK
27 OCT 98
JAF
CHECK
9 JAN 75
DJW
CHECK
6 JAN 75
DRAWN JAL

FORMTEK
FO-52848-A