

MICRO SWITCH



A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
PINEPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC


CATALOG LISTING

3MN6

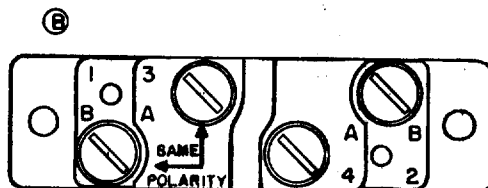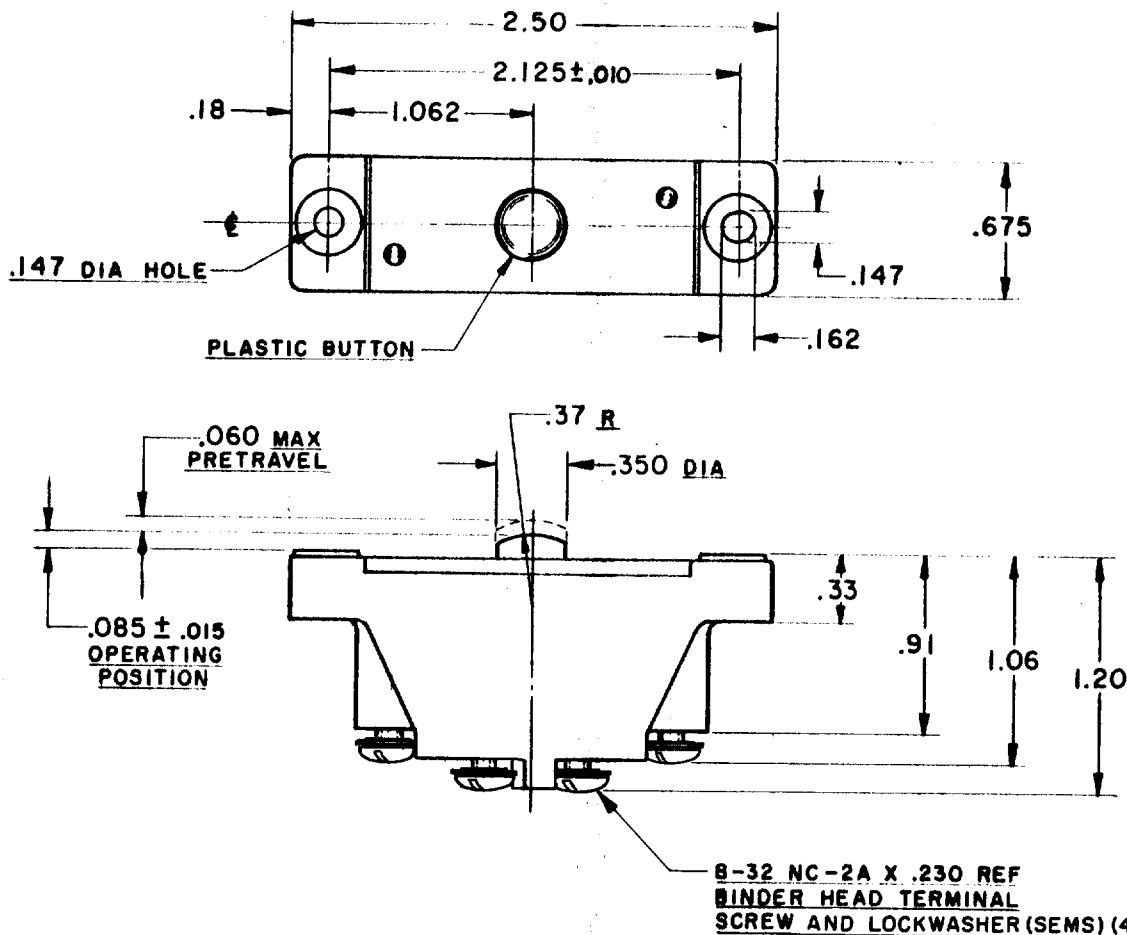

NOTE-

1- MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON $2.125 \pm .005$ CENTERS

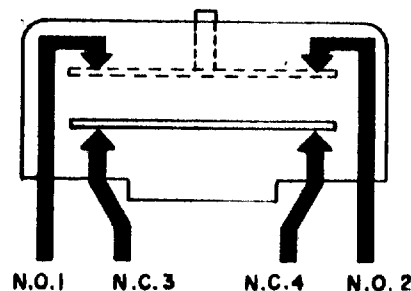

CIRCUIT DIAGRAM

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE ——— 7-11 OZ

RELEASE FORCE ——— 4 OZ MIN

DIFFERENTIAL TRAVEL ——— .015-.025

OVERTRAVEL ——— .080 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

UL RECOGNIZED - FILE E22779

15 A-120, 240, 480, OR 600 VAC

1/2 HP-120 VAC; 1 HP-240 VAC

0.8 A-115 VDC; 0.4 A-230 VDC

PILOT DUTY RATING: 600 VAC MAX

(C)



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) $\pm .030$

TWO PLACE (.00) $\pm .015$

THREE PLACE (.000) $\pm .005$

ANGLES $\pm$

WEIGHT

3MN6

M

DRAWING
NUMBER

2

X

5

ISSUE

3

REPLACES

RELEASE NO. SR 8314

CHECK

REVISIONS

A SR 8314
M B F
24 JUNE 59

B CORR
L M H
AUG 59

C CO 15776
K L B
APR 61

D CO 39150
W L W
6 SEPT 77

CHECK

9 APR 59

24 JUN 59

6 CH

9 APR 59

6 CH

9 APR 59

6 CH

9 APR 59

6 CH

9 APR 59

6 CH

9 APR 59

6 CH

9 APR 59

6 CH