

HONEYWELL PART NUMBER
3SX1-T
PRODUCT CODE VDD0150

REV	DOCUMENT	CHANGED BY	CHECK
16	0089212	NMN 09MAY12	CMH


B

A

A


B

A

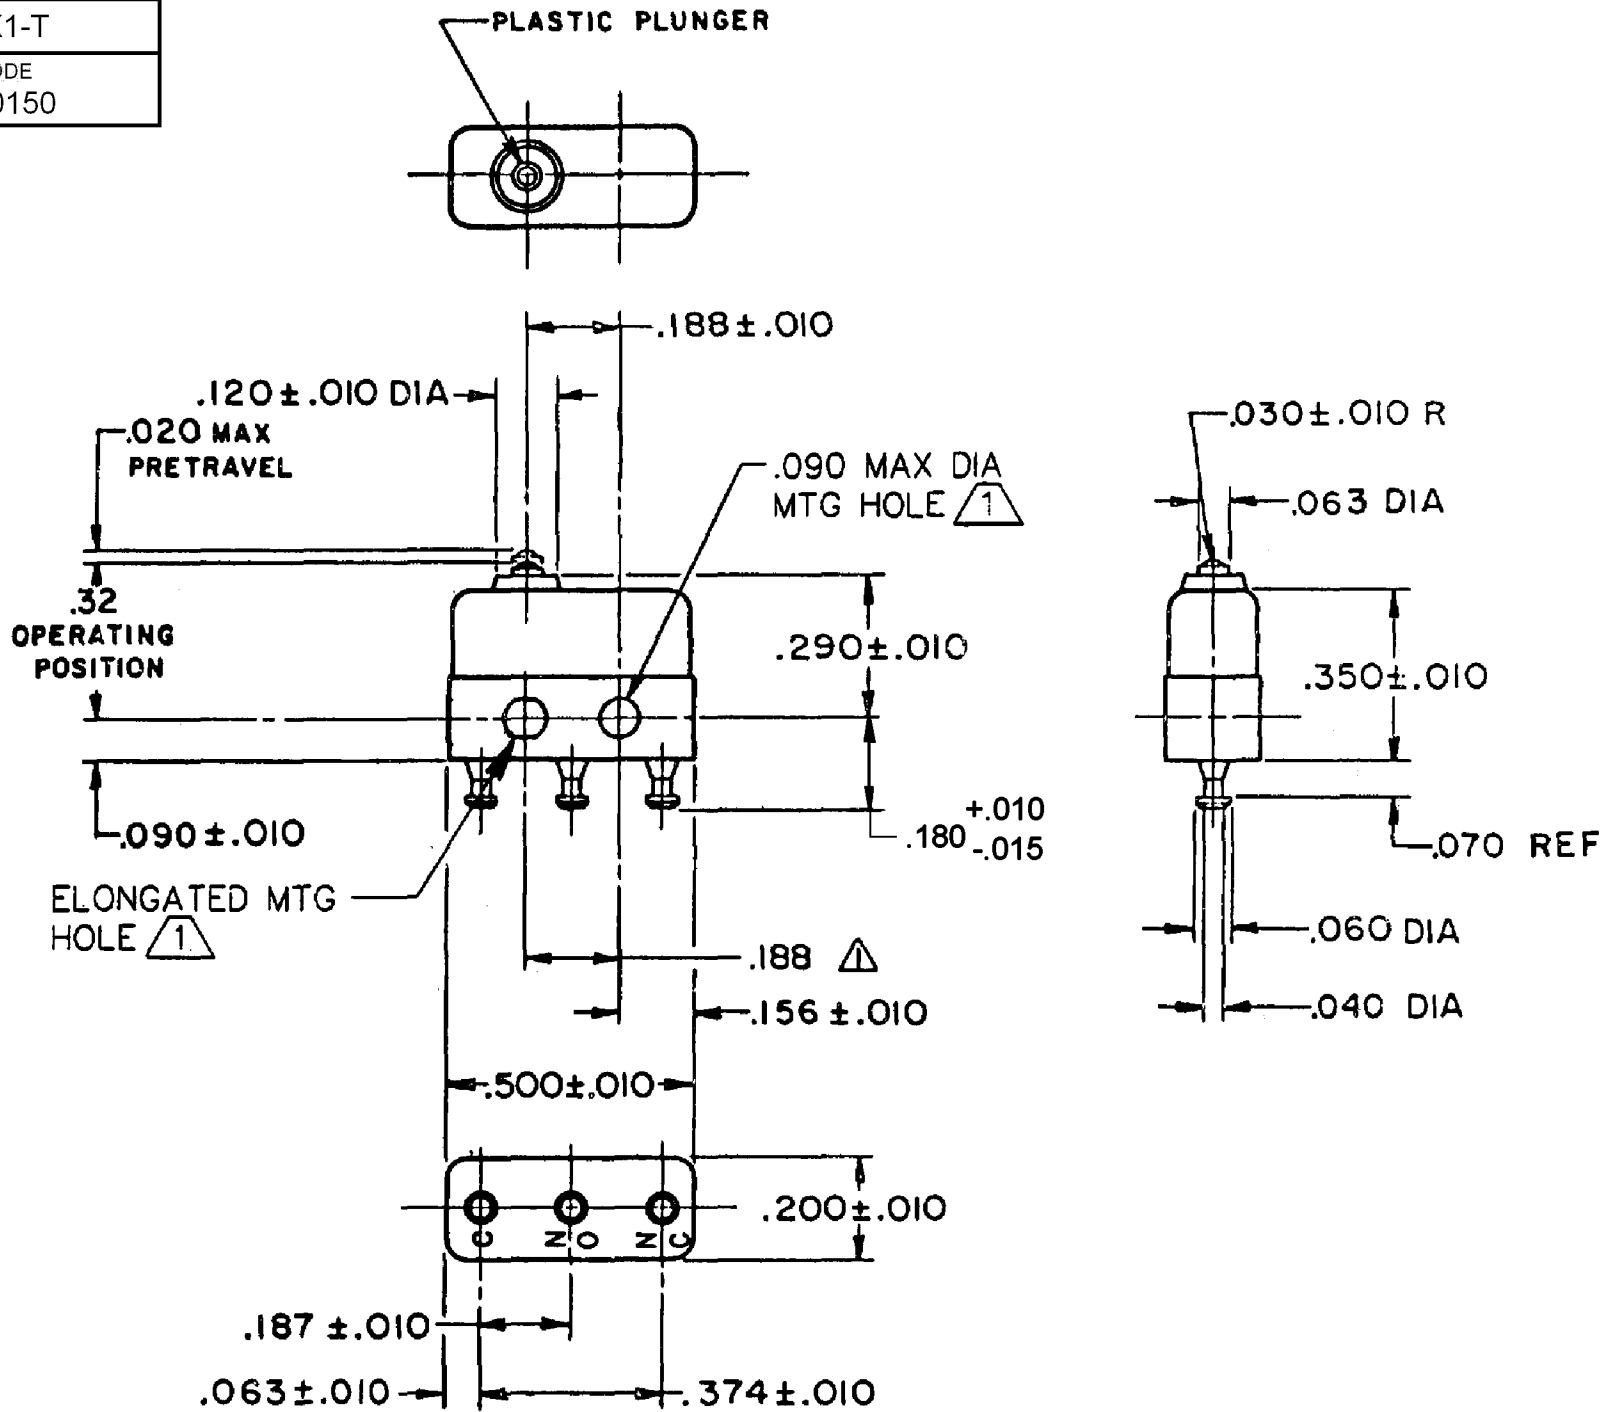

- NOTES**
- 1-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
 - 2-TERMINALS ARE SOLDER DIPPED WITH RoHS-COMPLIANT TIN/COPPER/SILVER SOLDER.
 - 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4-MOVABLE CONTACT MATERIAL- GOLD PLATED GOLD ALLOY
 - 5-STATIONARY CONTACT MATERIAL- GOLD ALLOY

RELEASE NO.	SR 8806
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±			DRAWN		SPK	05FEB08	Honeywell			
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK		RJ	05FEB08				
RELEASE FORCE— — — — — 1 OZ MIN		30 VOLTS DC RATING			.030 .015 .005			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT											
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE		0.5 AMP	0.5 AMP	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV		
		RESISTIVE		1 AMP	1 AMP				B	I	3SX1-T		16		
		MAXIMUM INRUSH 2 AMP			THIRD ANGLE PROJECTION 			RASTER				SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1
		APPROVALS	KEMA, CE	1A 250V~ T125 25E3 											
			UL, CSA	1 A 125 VAC  BRAND L22J											