




HONEYWELL
PART NUMBER

411SM701-H4

PRODUCT CODE

TZG0080

REV	DOCUMENT	CHANGED BY	CHECK
9	0038445	SSK 28APR08	BLR

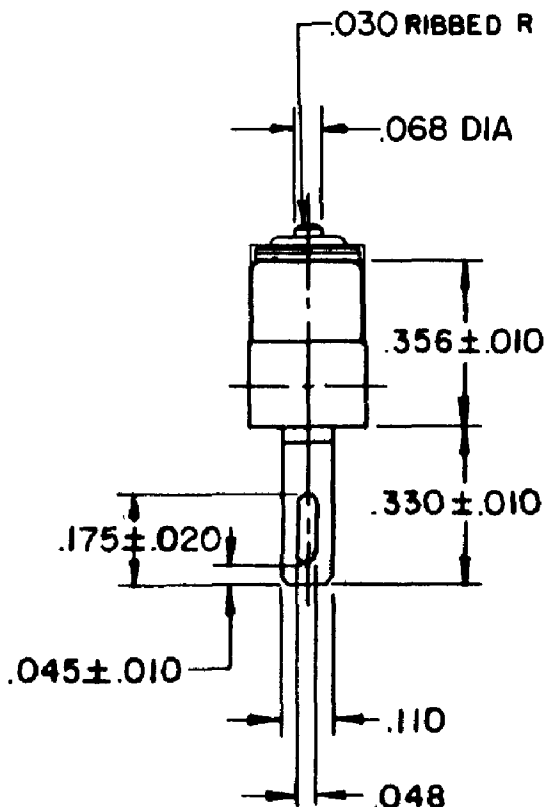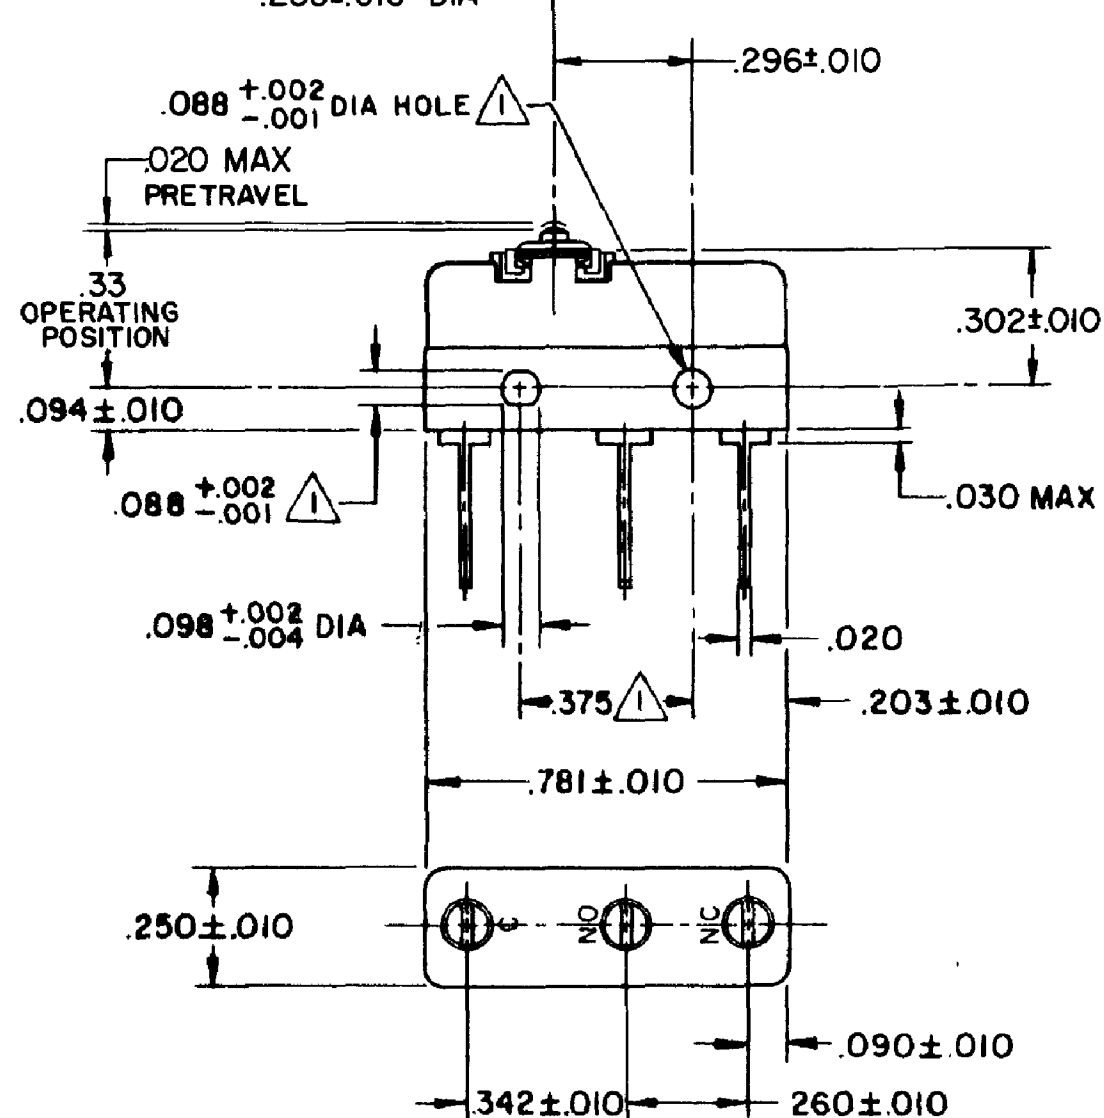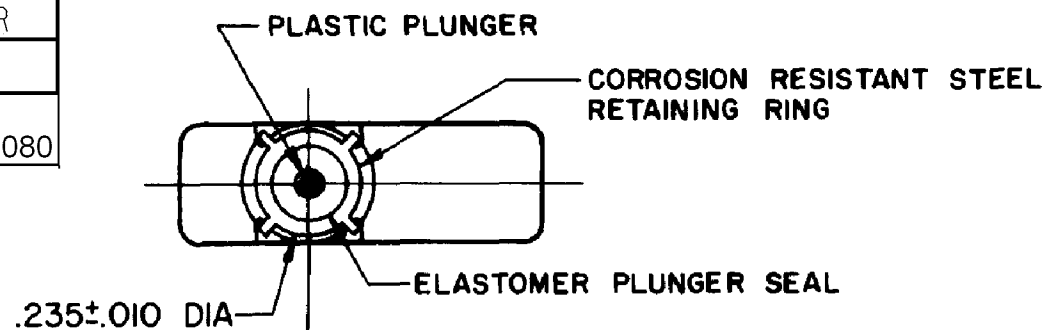

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURES FROM -40° F TO +250° F
- 4 TEMPERATURE EXTREMES MAY CAUSE FORCE CHARACTERISTICS TO CHANGE. STATED CHARACTERISTICS ARE FOR ROOM TEMPERATURE
- 5 - SEAL CONSTRUCTION PROVIDES SPLASH AND DUST RESISTANCE

RELEASE NO.
PR -3459

REPLACES
-

CHARACTERISTICS 4

OPERATING FORCE -- 100 GRAM MAX

RELEASE FORCE-- -- 14 GRAM MIN

DIFFERENTIAL TRAVEL-- -- .002 MAX

OVERTRAVEL-- -- -- .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

30 VOLTS DC RATING

	SEA LEVEL	50,000 FT
INDUCTIVE	3 AMP	2.5 AMP
RESISTIVE	5 AMP	5 AMP

MAXIMUM INRUSH 24 AMP

APPROVALS	UL, CSA	4A, 250 VAC	UL	CS	BRAND	L119
-----------	---------	-------------	----	----	-------	------

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±
ONE PLACE	.X	±
TWO PLACE	.XX	±
THREE PLACE	.XXX	±
FOUR PLACE	.XXXX	±
ANGLES		±

THIRD ANGLE PROJECTION



DRAWN	VK	26FEB 08
CHECK	RJ	26FEB 08
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	411SM701-H4	9
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1