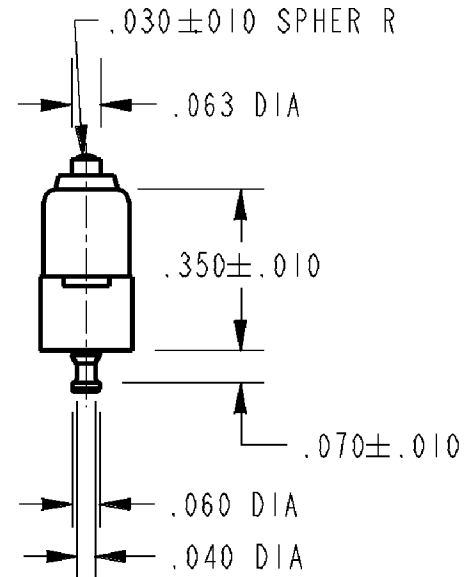




REV	DOCUMENT	CHANGED BY	CHECK
8	0038558	SS 21MAY08	BLR



① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON $.188 \pm .002$ CENTERS

- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400°F
- 4 - MOVABLE CONTACT MATERIAL - 24K SOLID GOLD OVERLAY
- 5 - STATIONARY CONTACT MATERIAL - GOLD ALLOY

RELEASE NO.	PR-18199
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	SPK	28FEB08	Honeywell					
OPERATING FORCE ----- 5 OZ MAX		CONTACT ARRANGEMENT S P D T					CHECK	RJ	28FEB08					TITLE SWITCH - BASIC	
RELEASE FORCE----- 1 OZ MIN		28 VOLTS DC RATING					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL. INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME			
DIFFERENTIAL TRAVEL---.003 MAX		SEA LEVEL 50,000 FT								B	I	412SX22-T		8	
OVERTRAVEL----- .004 MIN		INDUCTIVE 0.5 AMP -			RASTER					SCALE	-	WEIGHT: .003 LB MAX		SHEET 1 OF 1	
		RESISTIVE 1 AMP -													
		-													
		APPROVALS	KEMA, CE	1A 250 V ~ T125 25E3 											
			UL, CSA	1A 125 VAC   BRAND L22J											