MICRO SWITCH
a Honeywell Division
FED.MFG.CODE 91929

ASSEMBLY – SWITCH

CATALOG LISTING
41AC1–1

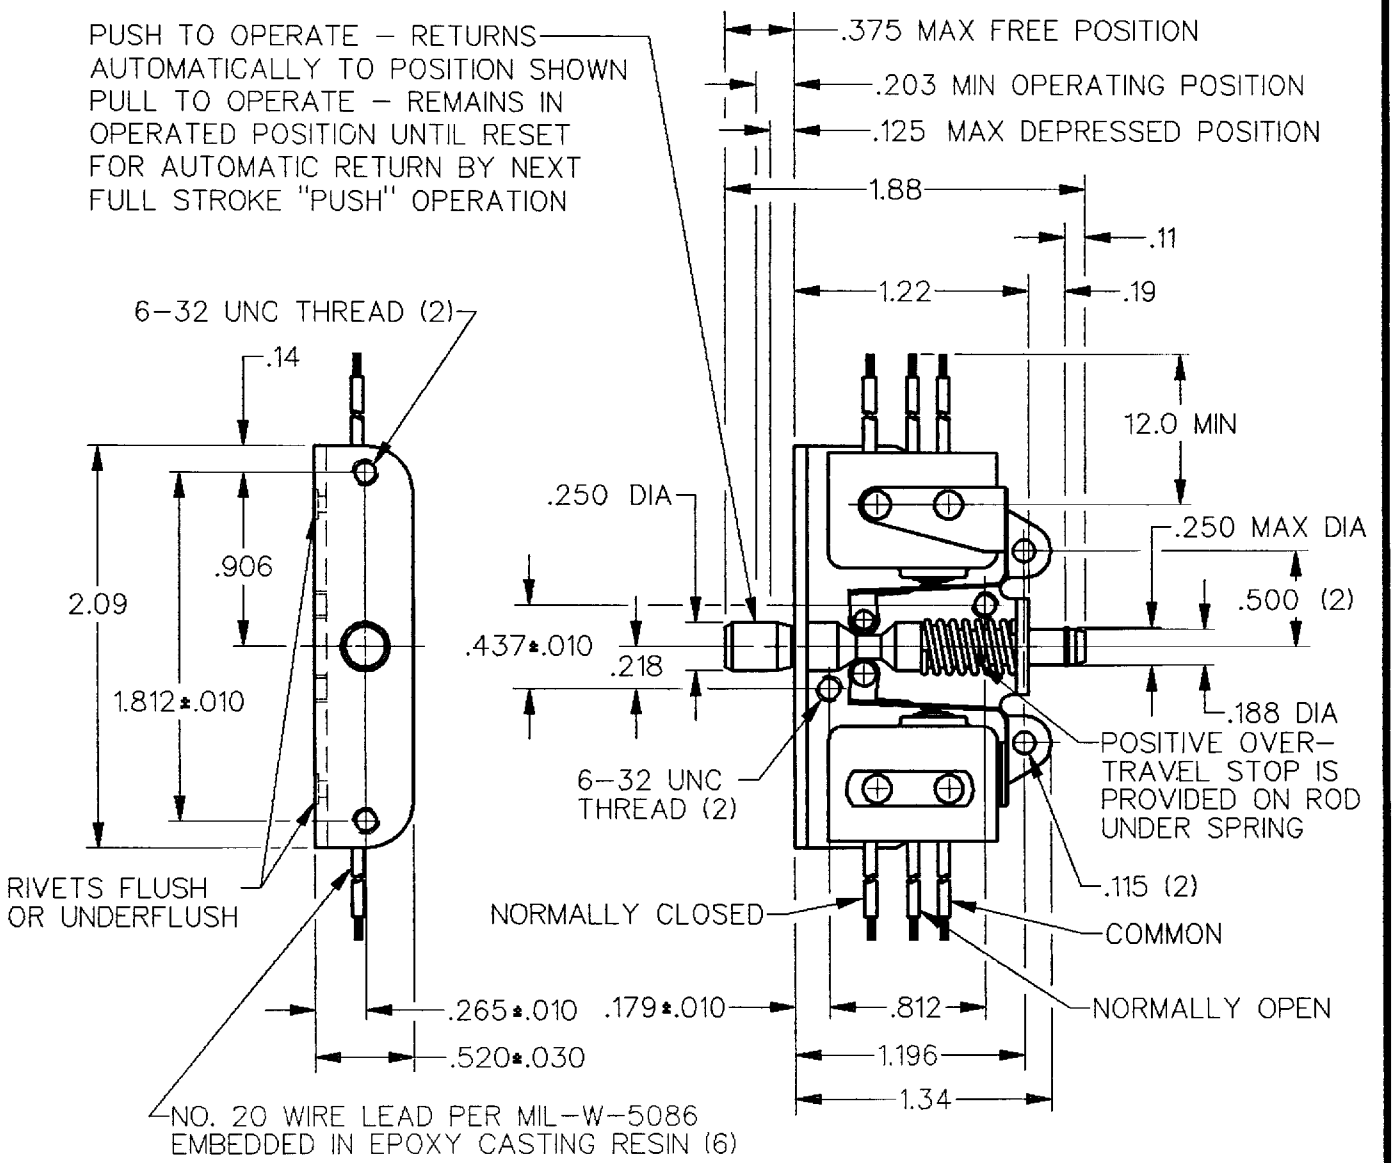

NOTES
1 – UNIT INCLUDES CATALOG LISTING "12SE" TYPE BASIC SWITCH (2)
2 – NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
3 – SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

TOTAL TRAVEL – – – – .250 APPROX PUSH DIRECTION

.188 APPROX PULL DIRECTION

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

250 VAC – – – – – – – – – – – – 5 AMP

30 VOLTS DC RATING
INDUCTIVE – – – SEA LEVEL – – – 3 AMP
50,000 FT – – 2.5 AMP
RESISTIVE – – – SEA LEVEL – – – 5 AMP
50,000 FT – – – 5 AMP
MAXIMUM INRUSH – – – – – – – – – 24 AMP

SCALE FULL — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT

REVISIONS
A REL DWG PR17287 WJM 29 AUG 89

DRAWN WJM 29 AUG 89 DDM/CAD
CHECK JAP 11 SEP 89
CHECK
CHECK
CHECK
ISSUE 3
DRAWING NUMBER M 41AC1–1
RELEASE NO. PR–17287
REPLACES "P" ORDER