



HONEYWELL PART NUMBER
41SM1-H2
PRODUCT CODE TYC0130

REV	DOCUMENT	CHANGED BY	CHECK
8	0038112	KVS 04JUN08	ASD

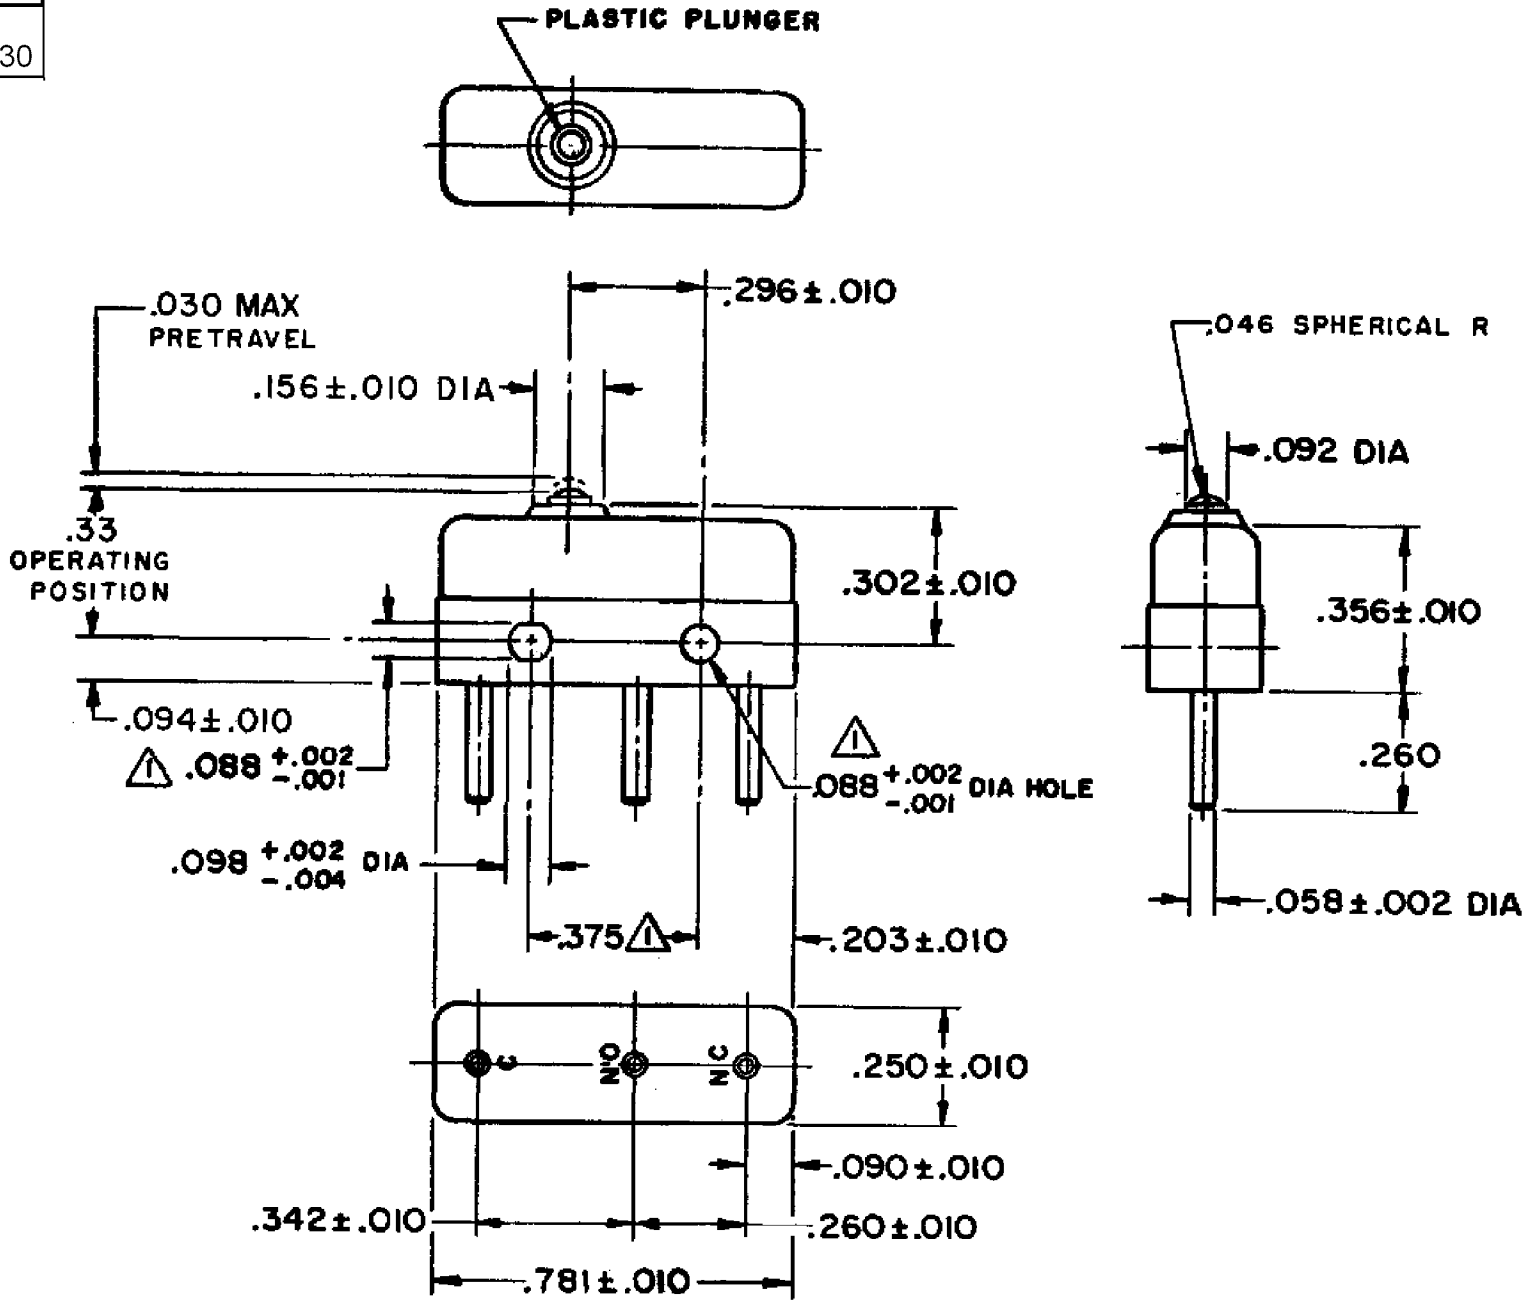

NOTE -
1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR - 683
REPLACES -

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± - ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± - ANGLES ± - THIRD ANGLE PROJECTION 			DRAWN	VK	24 OCT 07	Honeywell				
OPERATING FORCE — — — 3-5 OZ	CONTACT ARRANGEMENT SPDT						CHECK	RJ	24 OCT 07					
RELEASE FORCE — — — — 1 OZ MIN	APPROVALS	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 				THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL — — — .004 MAX			UL, CSA				11A 1/4 HP 125 250 VAC 5A 30 VDC 1/2 A 125 VDC  	BRAND L212	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B	TYPE I	DRAWING NAME 41SM1-H2
OVERTRAVEL — — — — — .005 MIN					RASTER			SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1				