


FO-55111-A

HONEYWELL
PART NUMBER

41SM1-H251

PRODUCT CODE
TYC0146

REV	DOCUMENT	CHANGED BY	CHECK
3	0038112	KVS 04JUN08	ASD

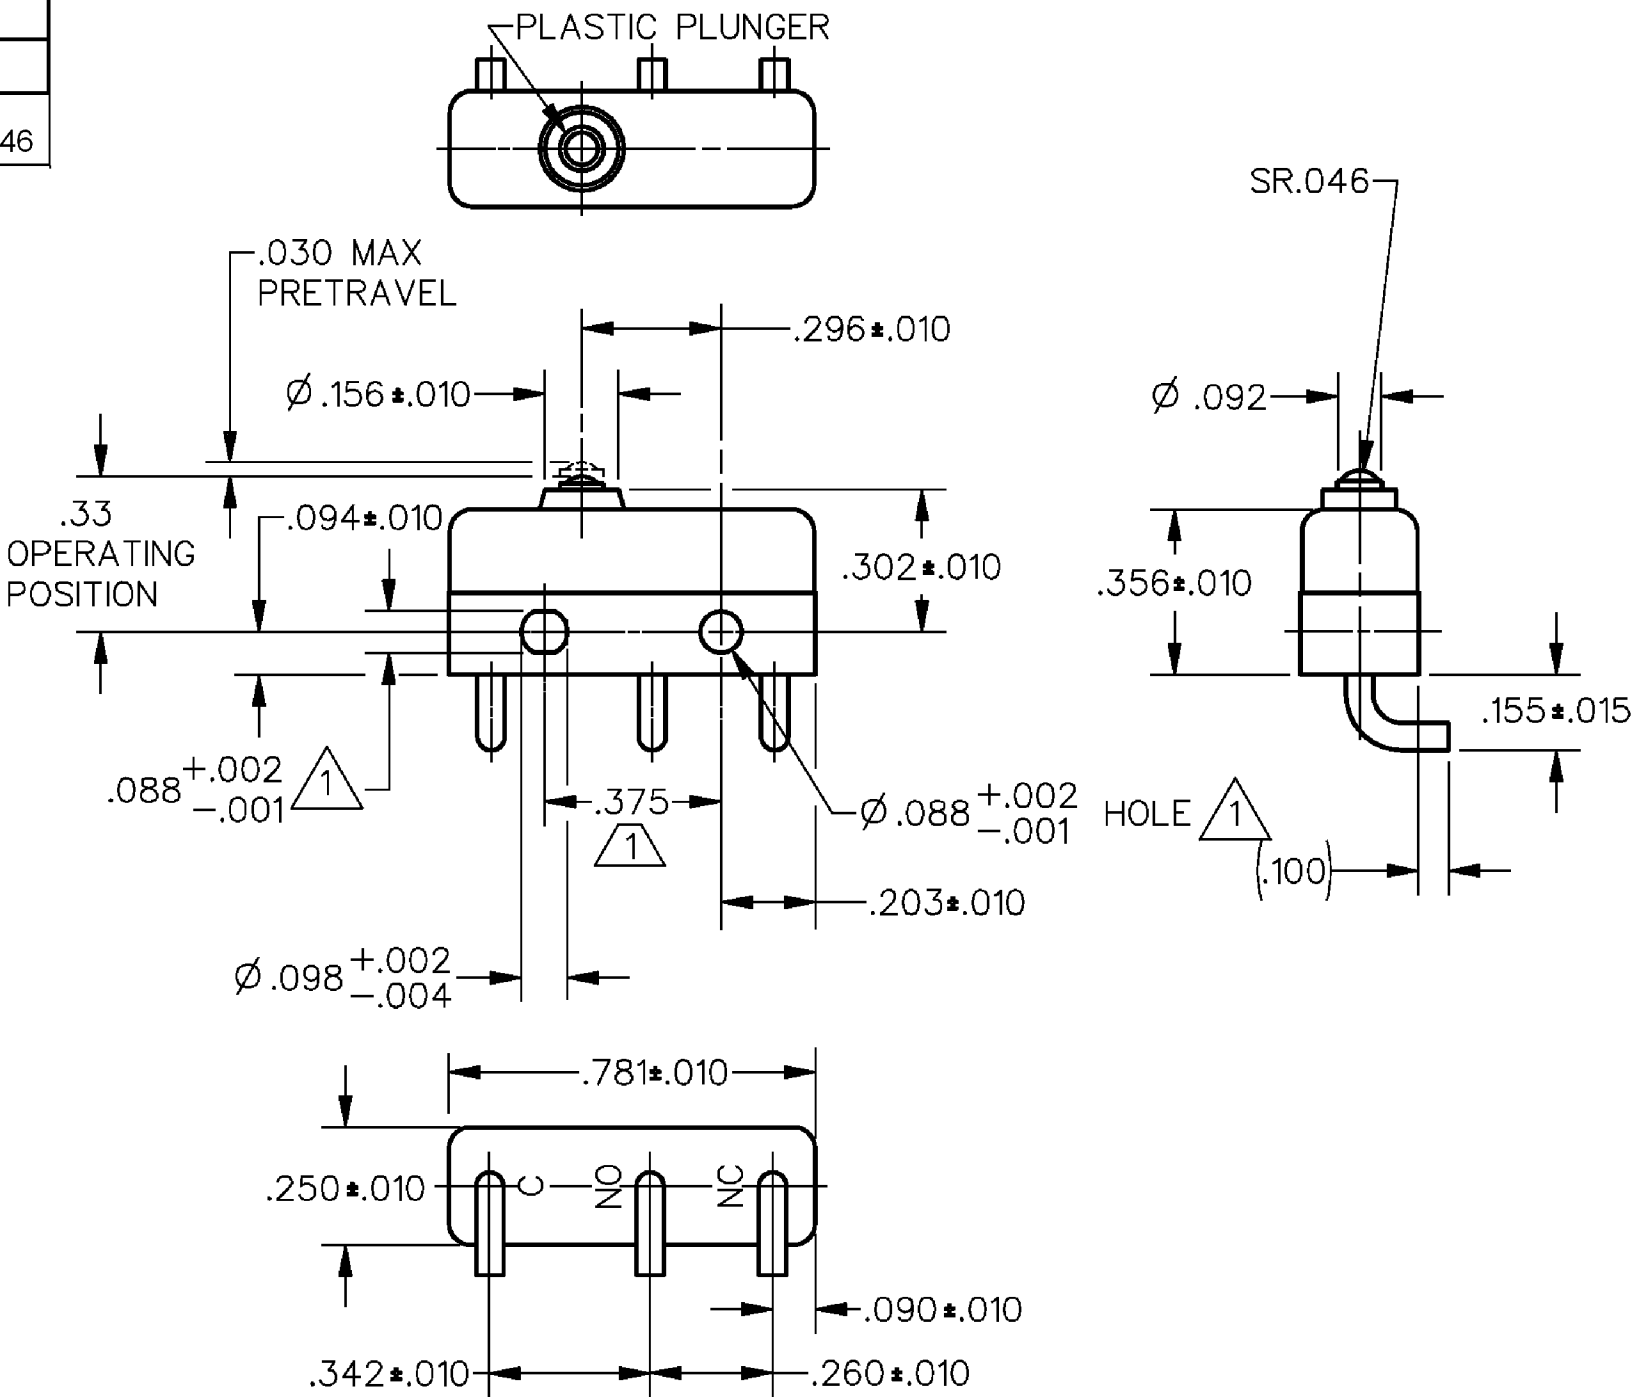

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .375 ±.002 CENTERS
- 2 - TERMINALS ARE PLATED FOR SOLDERING
- 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.
PR - 21483

REPLACES
X98042 - SM

CHARACTERISTICS		ELECTRICAL DATA				DESIGN UNITS: INCH				DRAWN	VK	24 OCT 07		Honeywell				
OPERATING FORCE — — — 3-5 OZ		CONTACT ARRANGEMENT SPDT				TOLERANCES UNLESS NOTED:				CHECK	RJ	24 OCT 07						
RELEASE FORCE — — — — 1 OZ MIN		APPROVALS KEMA, CE 11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4  UL, CSA 11A 1/4 HP 125 250 VAC 5A 30 VDC   1/2 A 125 VDC BRAND L212				NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±				- 0.030 0.015 0.005 - -	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL — — .004 MAX						THIRD ANGLE PROJECTION 					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY							
OVERTRAVEL — — — — .005 MIN										RASTER				SIZE B	TYPE I	DRAWING NAME 41SM1-H251		REV 3
														SCALE -	WEIGHT .006 LB MAX		SHEET 1 OF 1	