



HONEYWELL PART NUMBER
41SM1-H4
PRODUCT CODE TYC0132

REV	DOCUMENT	CHANGED BY	CHECK
6	0038112	KVS 04JUN08	ASD

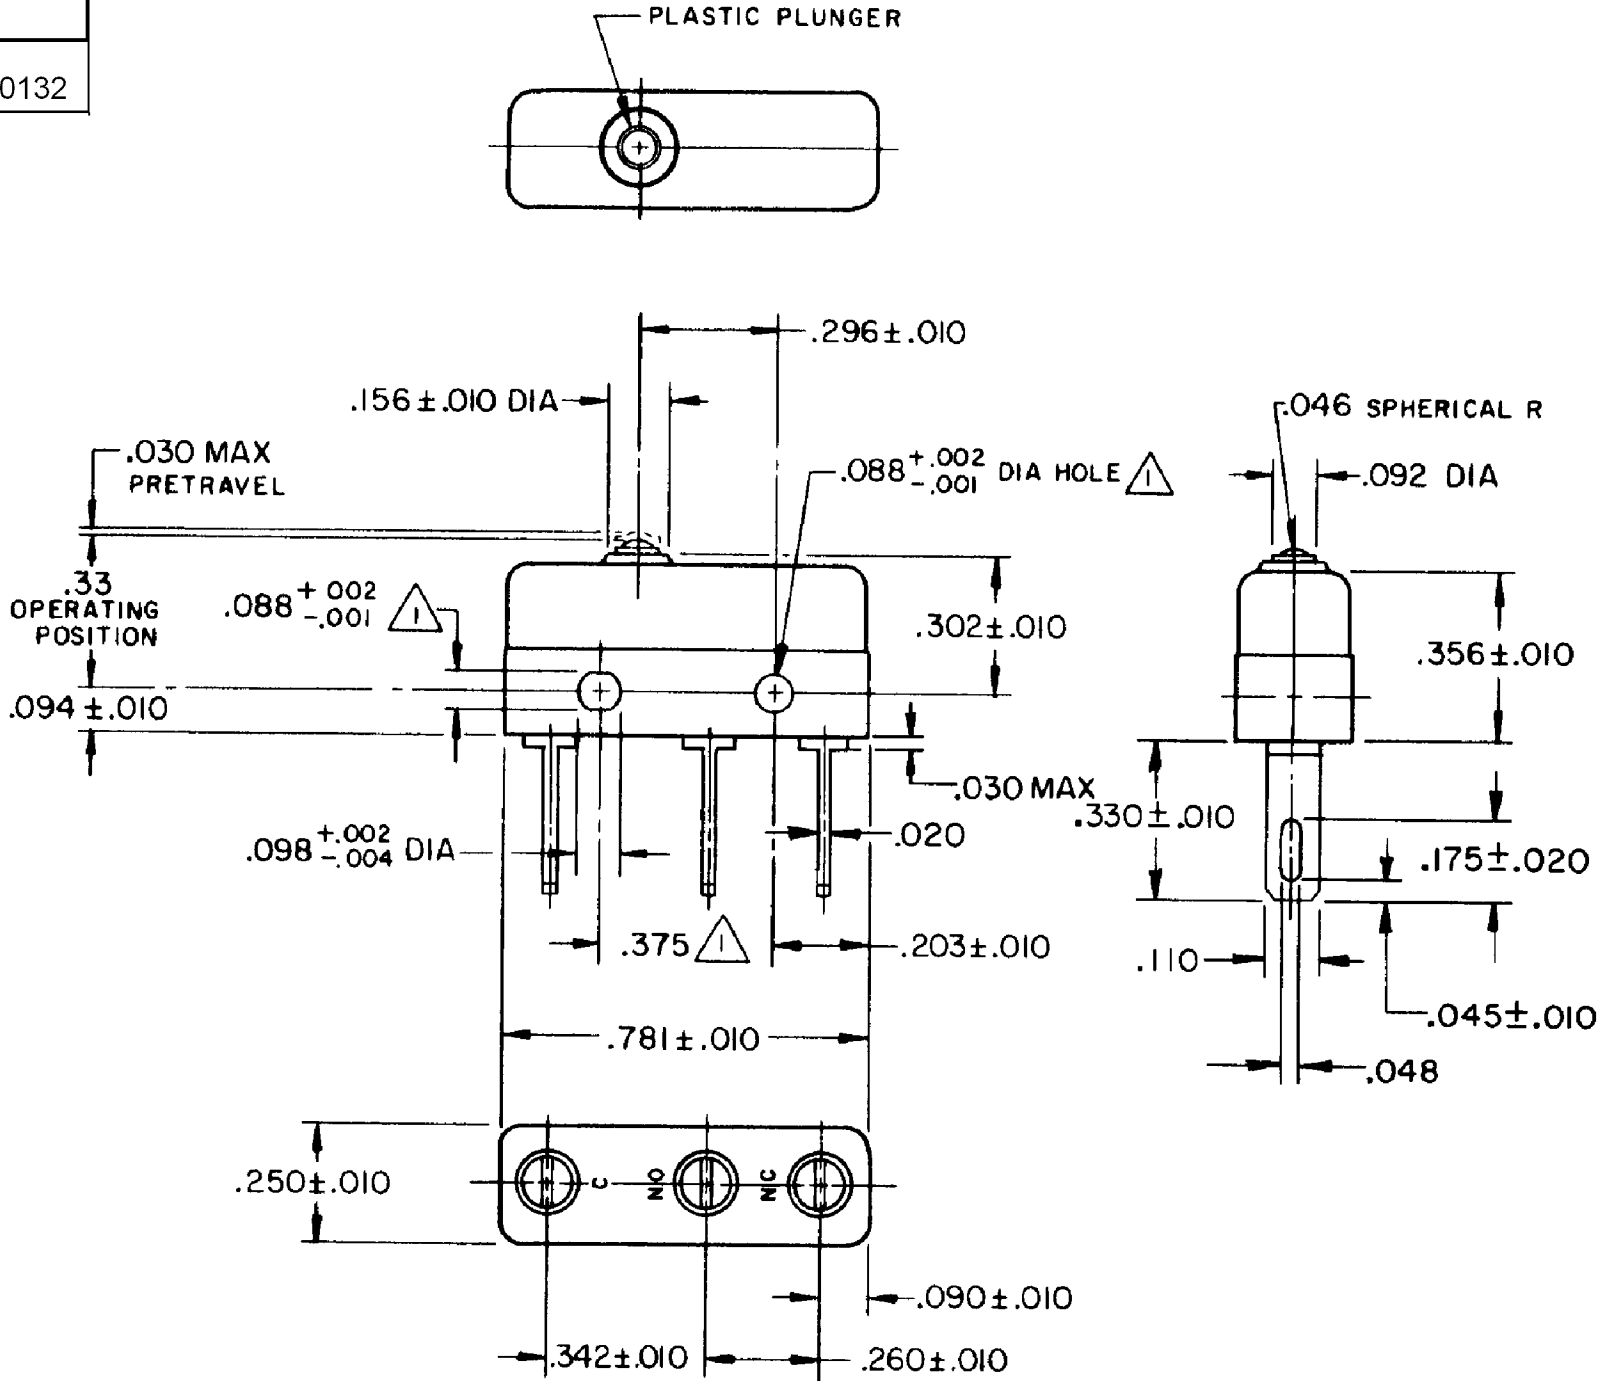

NOTE -
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250°F

RELEASE NO.	PR - 2820
REPLACES	-

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	VK	24 OCT 07	Honeywell					
OPERATING FORCE — — — 3-5 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	24 OCT 07					THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.	
RELEASE FORCE — — — — 1 OZ MIN		APPROVALS	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		TITLE SWITCH - BASIC							
DIFFERENTIAL TRAVEL — — .004 MAX				UL, CSA	11A 1/4 HP 125 250 VAC 5A 30 VDC   BRAND L212							SIZE	TYPE	DRAWING NAME	
OVERTRAVEL — — — — .005 MIN										B	I	41SM1-H4		6	
							RASTER			SCALE -		WEIGHT .006 LB MAX		SHEET 1 OF 1	