
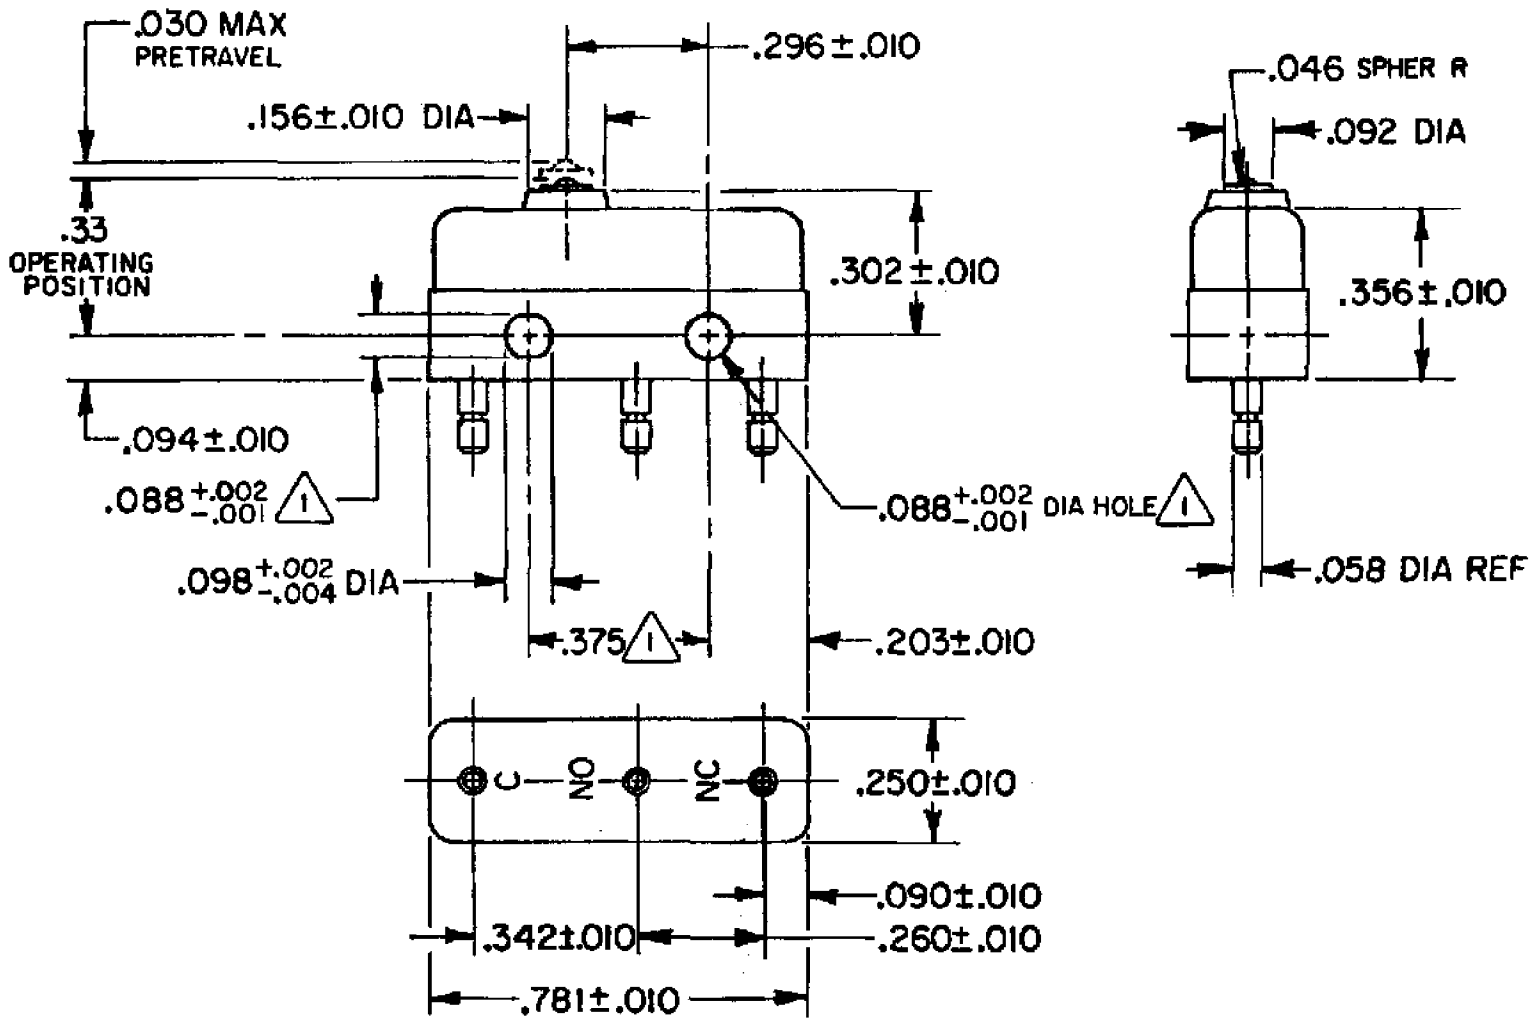


HONEYWELL PART NUMBER
41SM1-H58
PRODUCT CODE TYC0145

REV	DOCUMENT	CHANGED BY	CHECK
4	0038112	KVS 04JUN08	ASD

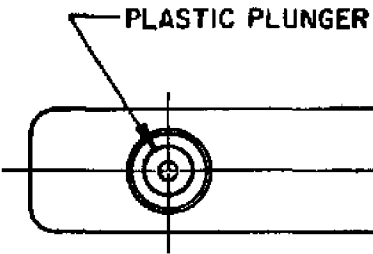

- NOTE
- 1 MOUNTING HOLE WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F
 - 4 - PLATED TERMINALS WILL ACCEPT "AMP INC" .058 DIA PIN RECEPTACLES

RELEASE NO. PR - 15215

REPLACES -

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 	DRAWN	VK	24 OCT 07	Honeywell			
OPERATING FORCE — — — 3-5 OZ	CONTACT ARRANGEMENT SPDT				CHECK	RJ	24 OCT 07				
RELEASE FORCE — — — — 1 OZ MIN	APPROVALS	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC			
DIFFERENTIAL TRAVEL — — — .004 MAX			UL, CSA		11A 1/4 HP 125 250 VAC 5A 30 VDC 1/2 A 125 VDC  		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				
OVERTRAVEL — — — — — .005 MIN								RASTER			SIZE B
								SCALE -	WEIGHT .006 LB MAX	SHEET 1 OF 1	