


HONEYWELL PART NUMBER
41SM1-S
PRODUCT CODE TYC0155

REV	DOCUMENT	CHANGED BY	CHECK
7	0038112	KVS 04JUN08	ASD

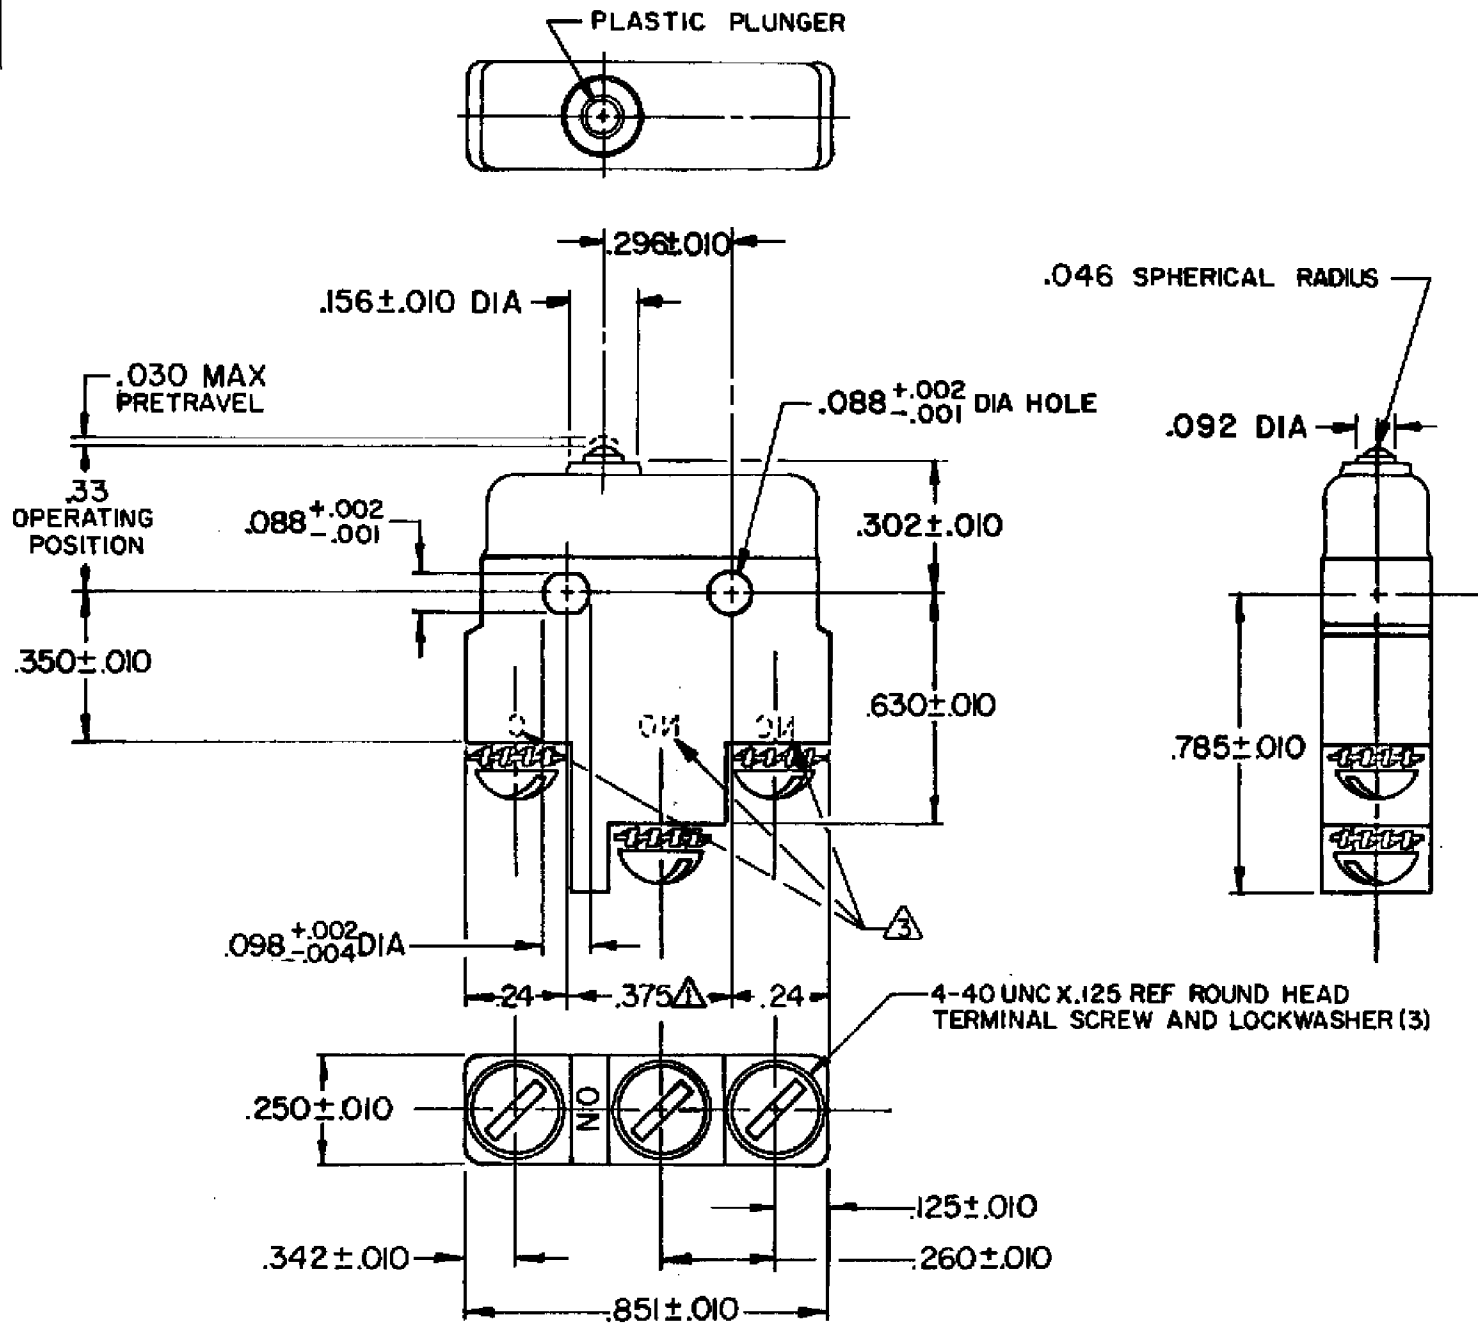

- NOTE -
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 - 2 SWITCH WILL WITHSTAND TEMPERATURE OF 250°F
 - 3 TERMINAL DESIGNATION STAMPED ON RIGHT SIDE OF SWITCH

RELEASE NO. PR - 6719

REPLACES

CHARACTERISTICS	ELECTRICAL DATA			DESIGN UNITS: INCH	DRAWN	VK	24 OCT 07	Honeywell		
	CONTACT ARRANGEMENT			TOLERANCES UNLESS NOTED:	CHECK	RJ	24 OCT 07			
	SPDT			NO PLACE X ±	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE		
				ONE PLACE .X ±				SWITCH - BASIC		
APPROVALS	KEMA, CE	11A 250V ~ T85 1E4		TWO PLACE .XX ±	INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME
		5A 30 Vdc T85 1E4		THREE PLACE .XXX ±				B	I	41SM1-S
		11A 1/4 HP 125 250 VAC		FOUR PLACE .XXXX ±	RASTER			SCALE	WEIGHT	SHEET
		5A 30 VDC		ANGLES ±				-	.006 LB MAX	1 OF 1
		1/2 A 125 VDC		THIRD ANGLE PROJECTION						
		BRAND L212								