


HONEYWELL PART NUMBER
41SM1
PRODUCT CODE TYC0100

REV	DOCUMENT	CHANGED BY	CHECK
6	0038112	KVS 04JUN08	ASD

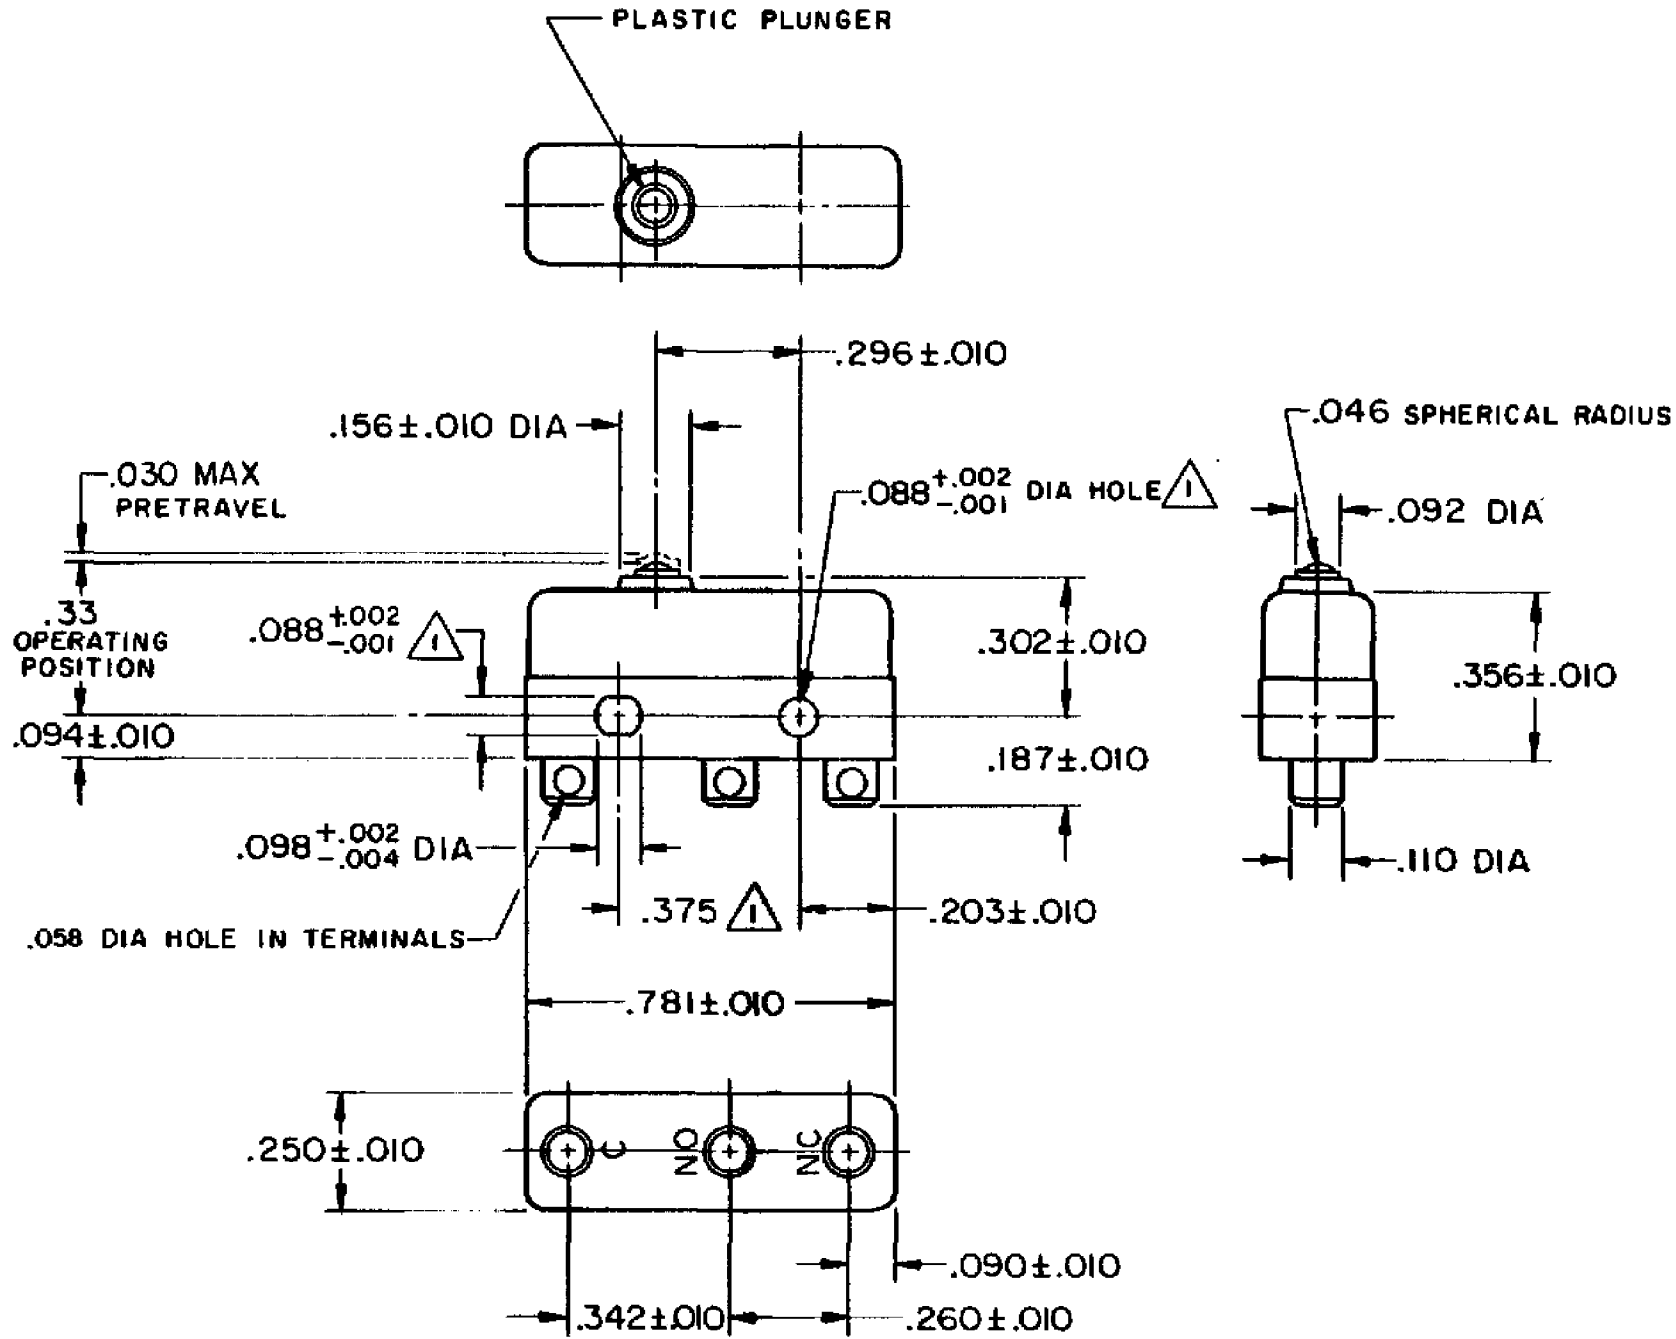

NOTE -


1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS

2 - TERMINALS ARE PLATED FOR SOLDERING

3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. SR - 12321

REPLACES -

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	VK	24 OCT 07	Honeywell				
OPERATING FORCE — — — 3-5 OZ		CONTACT ARRANGEMENT S P D T					CHECK	RJ	24 OCT 07					
RELEASE FORCE — — — — 1 OZ MIN		APPROVALS	KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 		- 0.030 0.015 0.005 - -	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE				
DIFFERENTIAL TRAVEL — — .004 MAX				11A 1/4 HP 125 250 VAC 5A 30 VDC   BRAND L212			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV
OVERTRAVEL — — — — .005 MIN							RASTER			B	I	41SM1		6
										SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1	