

HONEYWELL
PART NUMBER
41SM2
PRODUCT CODE
TYC0210

REV	DOCUMENT	CHANGED BY	CHECK
2	0038112	KVS 04JUN08	ASD

B


B

A

A

A

A

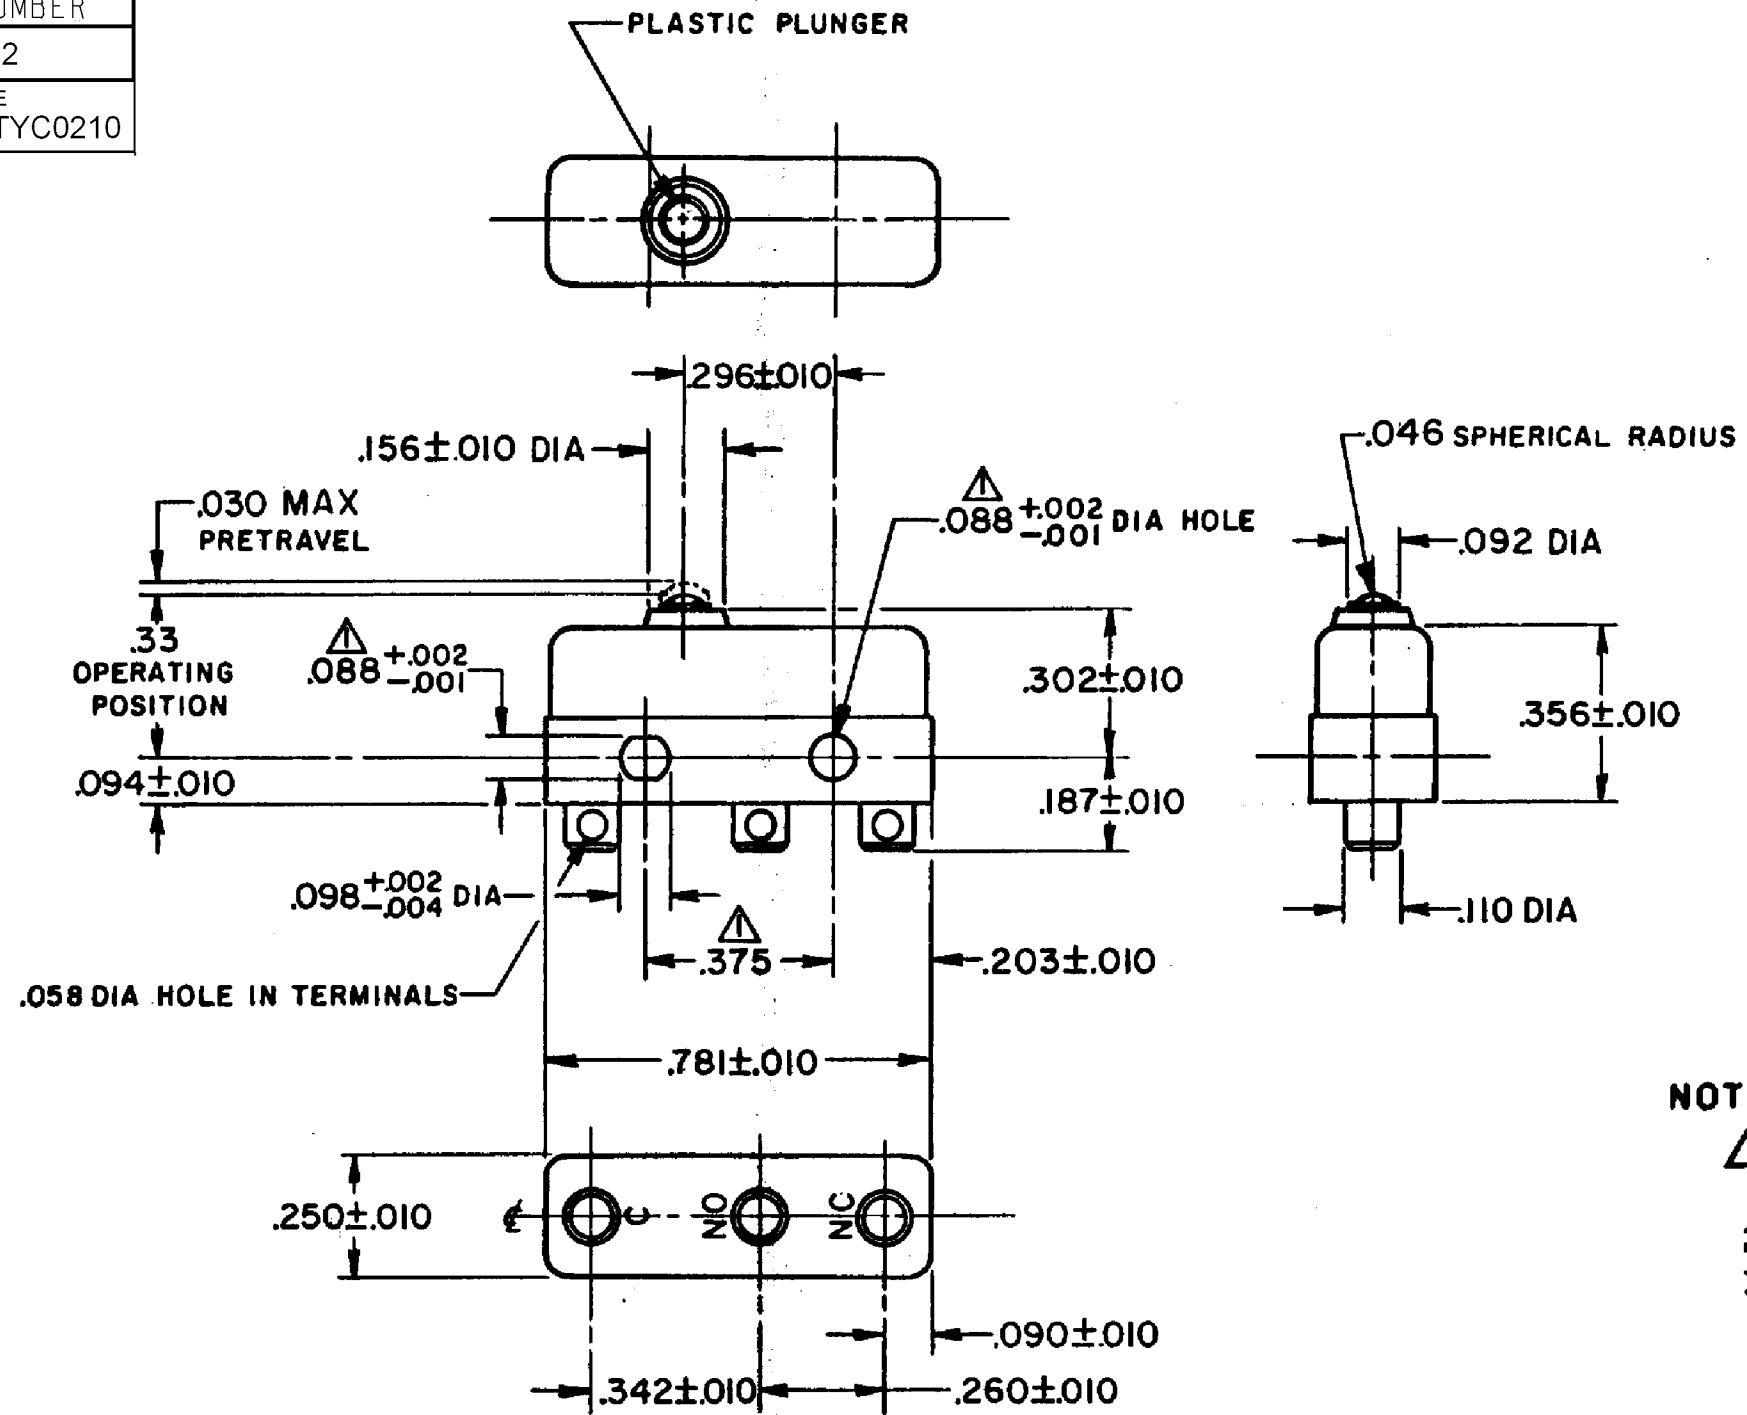

NOTE—
 ▲-MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .375±.002 CENTERS
 2-TERMINALS ARE PLATED FOR SOLDERING
 3-SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO.	PR - 7672
REPLACES	-

CHARACTERISTICS	
OPERATING FORCE	3 - 5 OZ
RELEASE FORCE	1 OZ MIN
DIFFERENTIAL TRAVEL	.004 MAX
OVERTRAVEL	.005 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT SPDT	
APPROVALS	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4 KEMA, CE
	11A 1/4 HP 125 250 VAC 5A 30 VDC UL, CSA BRAND L190

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:
NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±
THIRD ANGLE PROJECTION

DRAWN	VK	24 OCT 07
CHECK	RJ	24 OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		
RASTER		

Honeywell			
TITLE SWITCH - BASIC			
SIZE	TYPE	DRAWING NAME	REV
B	I	41SM2	2
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1