


HONEYWELL
PART NUMBER

41SM27-T

PRODUCT CODE
TYC2510

REV	DOCUMENT	CHANGED BY	CHECK
3	0038112	KVS 04JUN08	ASD

PLASTIC PLUNGER

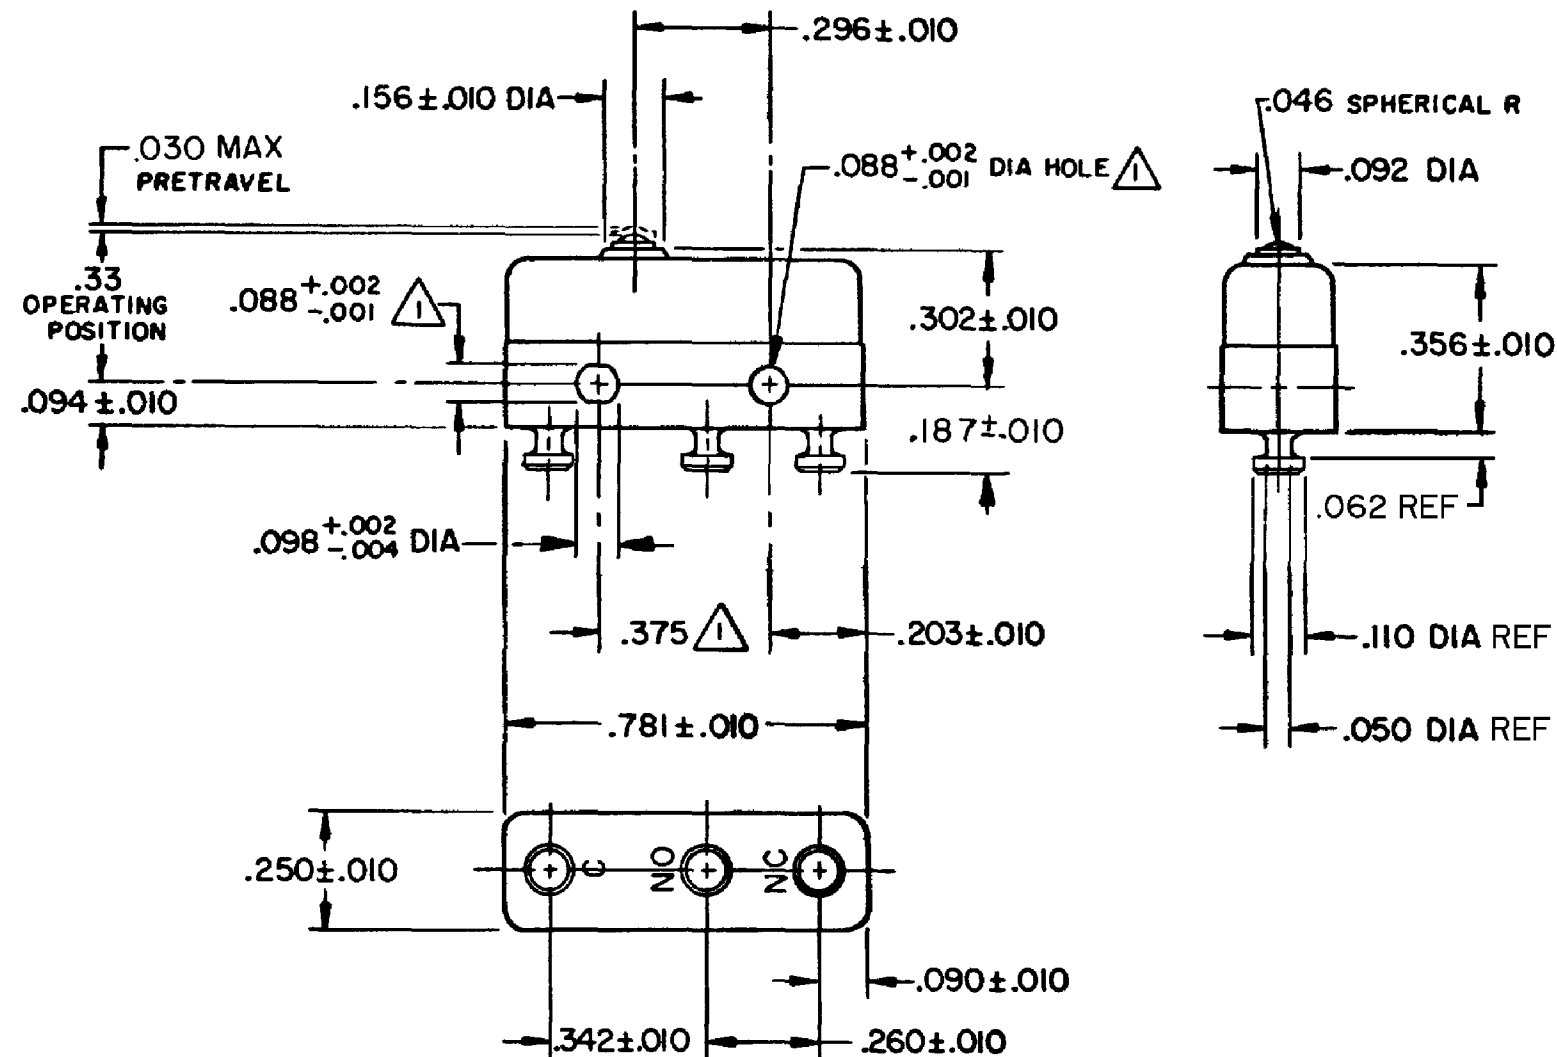

NOTE -



MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .087 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR - 10627

REPLACES -

CHARACTERISTICS

OPERATING FORCE - - - - 3-5 OZ

RELEASE FORCE - - - - 1 OZ MIN

DIFFERENTIAL TRAVEL - - - .004 MAX

OVERTRAVEL - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

KEMA, CE

11A 250V ~ T85 1E4
5A 30 Vdc T85 1E4

UL, CSA

11A 1/4 HP 125 250 VAC
5A 30 VDC
1/2 A 125 VDCBRAND
L212

DESIGN UNITS: INCH

TOLERANCES UNLESS NOTED:

NO PLACE	X	±	-
ONE PLACE	.X	±	0.030
TWO PLACE	.XX	±	0.015
THREE PLACE	.XXX	±	0.005
FOUR PLACE	.XXXX	±	-
ANGLES		±	-

THIRD ANGLE PROJECTION



DRAWN

VK

25 OCT 07

CHECK

RJ

25 OCT 07

THIS DRAWING COVERS A PROPRIETARY ITEM
AND IS THE PROPERTY OF HONEYWELL.
THIS DRAWING IS NOT TO BE COPIED OR USED
WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ANSI Y14.5M-1982
OTHER HONEYWELL ENGINEERING
STANDARDS MAY APPLY

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE

B

TYPE

I

DRAWING NAME

41SM27-T

REV

3

SCALE

-

WEIGHT .006 LB MAX

SHEET 1 OF 1