
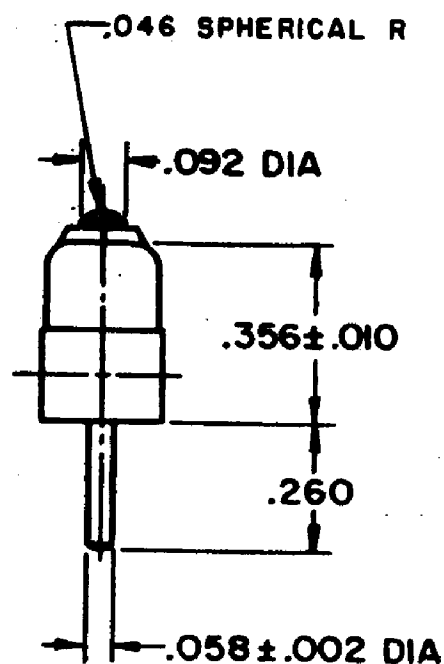
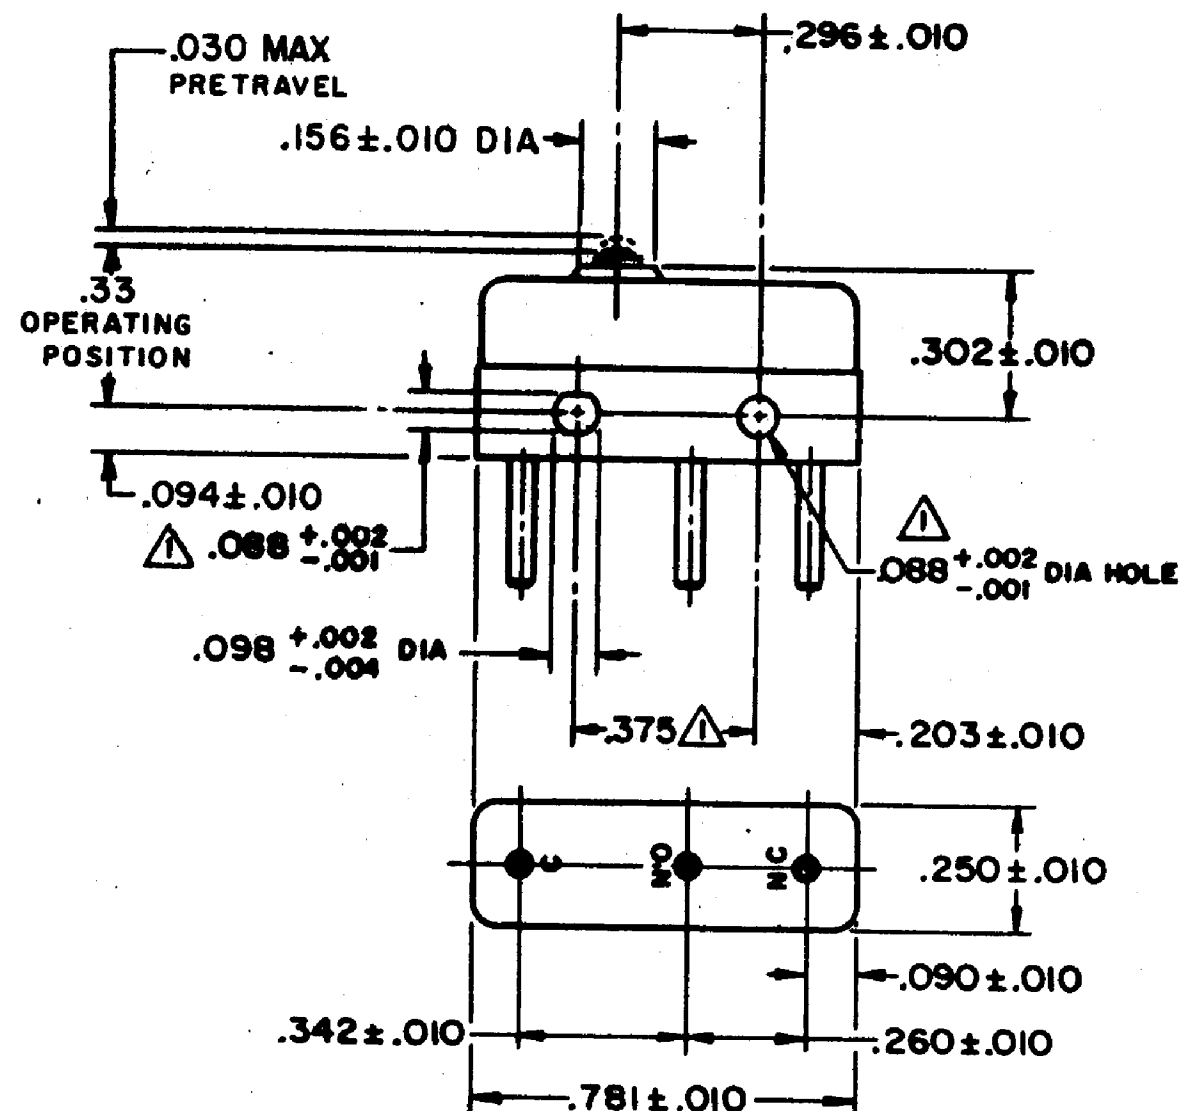


HONEYWELL
PART NUMBER

41SM28-H2

PRODUCT CODE
TYC2515

REV	DOCUMENT	CHANGED BY	CHECK
2	0038112	KVS 04JUN08	ASD

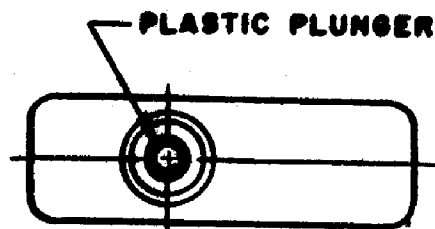

NOTE -

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .067 MAX DIA ON .375 ± .002 CENTERS
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 250° F

RELEASE NO. PR - 16230
REPLACES X87837 - SM

CHARACTERISTICS

OPERATING FORCE - - - 3 - 5 OZ
RELEASE FORCE - - - - 1 OZ MIN
DIFFERENTIAL TRAVEL - - - .003 MAX
OVERTRAVEL - - - - - .005 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
SPDT

APPROVALS

KEMA, CE	11A 250V ~ T85 1E4 5A 30 Vdc T85 1E4	BRAND L190
	11A 1/4 HP 125 250 VAC 5A 30 VDC	

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACE X ±
ONE PLACE .X ±
TWO PLACE .XX ±
THREE PLACE .XXX ±
FOUR PLACE .XXXX ±
ANGLES ±

THIRD ANGLE PROJECTION



DRAWN	VK	25 OCT 07
CHECK	RJ	25 OCT 07
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

RASTER

Honeywell

TITLE

SWITCH - BASIC

SIZE	TYPE	DRAWING NAME	REV
B	I	41SM28-H2	2
SCALE	-	WEIGHT .006 LB MAX	SHEET 1 OF 1