

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929



SWITCH-BASIC

CATALOG LISTING

41TB5-3

S


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

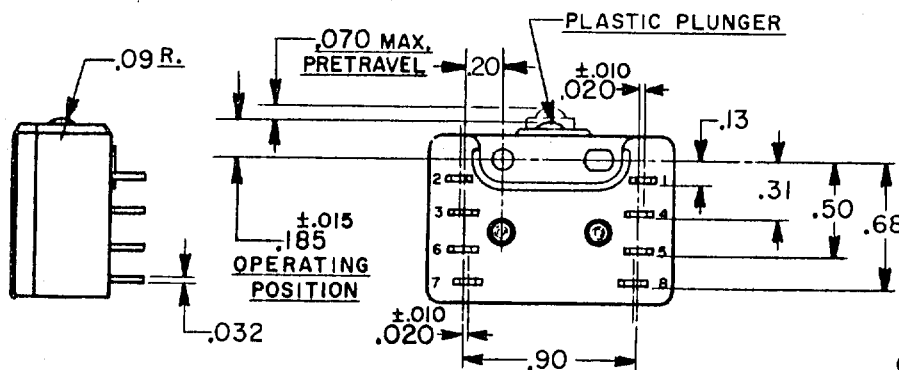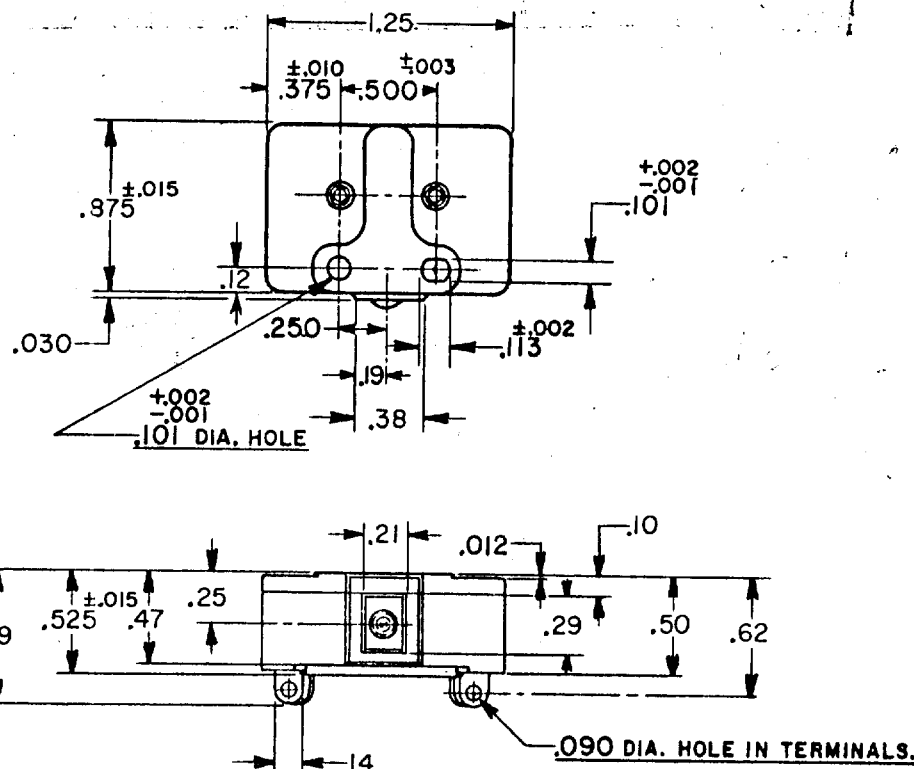

NOTE-

- 1-TERMINALS ARE PLATED FOR SOLDERING.
- 2-TERMINALS 1 & 2 ALSO 3 & 6 NORMALLY OPEN CIRCUITS.
- 3-TERMINALS 3 & 4 ALSO 7 & 8 NORMALLY CLOSED CIRCUITS.
- 4-SWITCH WILL WITHSTAND TEMPERATURE OF 300° F.

CIRCUIT DIAGRAM

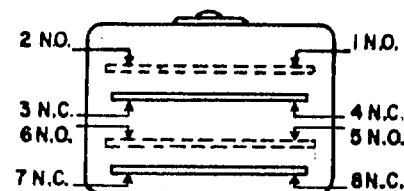

CHARACTERISTICS

OPERATING FORCE-----20-36 OZ.
(B)
RELEASE FORCE-----8 OZ. MIN.
DIFFERENTIAL TRAVEL-----.025-.045
OVERTRAVEL-----.010 MIN.

ELECTRICAL DATA

CONTACT ARRANGEMENT
SEE CIRCUIT DIAGRAM

UL RECOGNIZED - FILE E12252
CODE L25 10A-125 OR 250 VAC
1/2HP-125 VAC



SCALE - FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE
SPECIFIED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT .03 LB.

41TB5-3

M

DRAWING
NUMBER

26

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

36

74-96

DRAWN

N.H.L. 25 MAY '55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

CHECK

16 JUNE 55

(M) SKETCH 9977
ISSUE 1

REPLACES

RELEASE NO. SR 4525

CNT

13 JUNE 55

13 JUNE 55

13 JUNE 55

13 JUNE 55

13 JUNE 55

13 JUNE 55