


**MULTILAYER CERAMIC WIDEBAND ANTENNA
FOR WLAN IEEE 802.11a (5GHz ISM Band)**

Product Specification¹ (Preliminary)

QUICK REFERENCE DATA

Dimension	3.6* 2.7 * 0.9 mm
Central Frequency*	5.2 GHz
Bandwidth	>200 MHz
Gain*	1.5 dBi max
VSWR	2.0 max
Polarization	Linear
Azimuth	Omni-directional
Impedance	50Ω
Operating Temperature	-55~125 °C
Termination	Ni/Sn (Environmentally-Friendly Leadless)
Resistance to soldering heats	260°C, 10 sec.
Maximum Power	1W

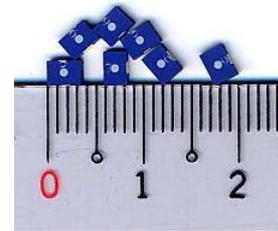

* Depending on ground plane size




Special Environmental Concerns- Green Products Design: The foil making process is using environmentally-friendly aqueous solvent technology. Termination is lead free (Pb free) and packing materials can be re-cycled

¹ All the technical data and information contained herein are subject to change without prior notice

HF R&D	Print date 05/03/04	Preliminary internal use				
		only				
						June 11, 02
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna		4311 127 00500 AN5000000703032K			Sep. 23, 02
Grant Lin/Cliff		2002-04-11	Page 1	sheet 190-1		A4
spec.doc	Phycomp Taiwan Ltd.					

APPLICATION

Suggested Layout


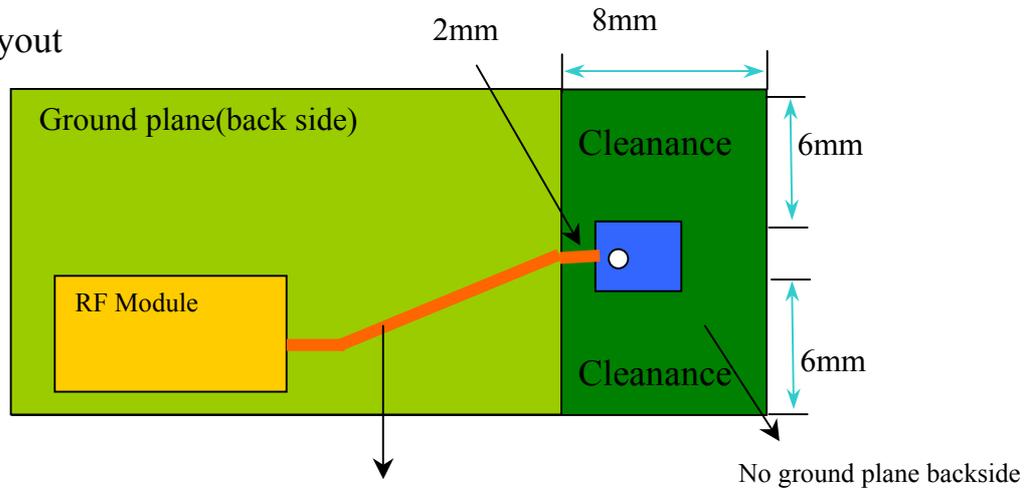


DIMENSIONAL DATA


Figure	Dimension	Port
	L	2.7±0.25 mm
	W	3.6±0.2 mm
	T	0.9±0.2 mm
	F	1.25±0.25 mm
	S1	1.25±0.25 mm

HF R&D	Print date 05/03/04	Preliminary internal use			
		only			June 11, 02
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna	4311 127 00500 AN5000000703032K		Sep. 23, 02	
Grant Lin/Cliff	2002-04-11	Page 2	sheet 190-2	A4	
spec.doc	Phycomp Taiwan Ltd.				

Radiation Pattern Polar Plot (Based on Suggested Layout)

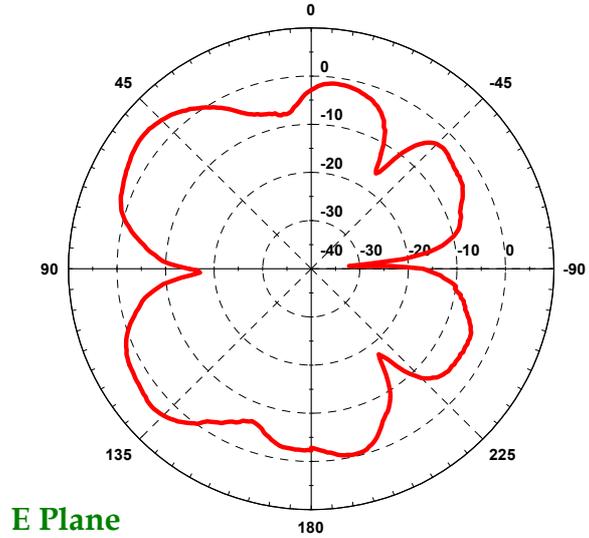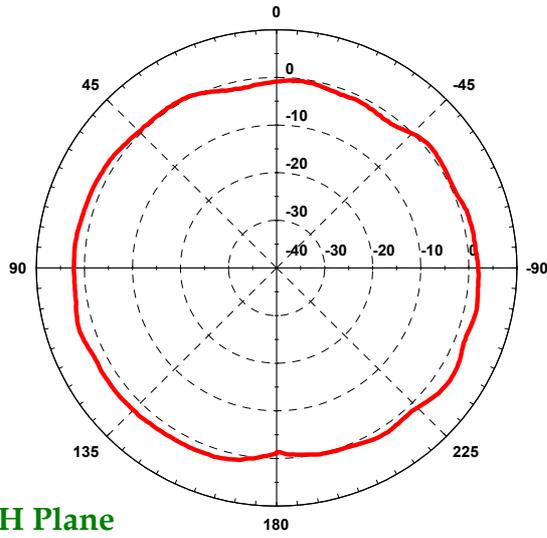


STANDARD TEST BOARD FOR SWR

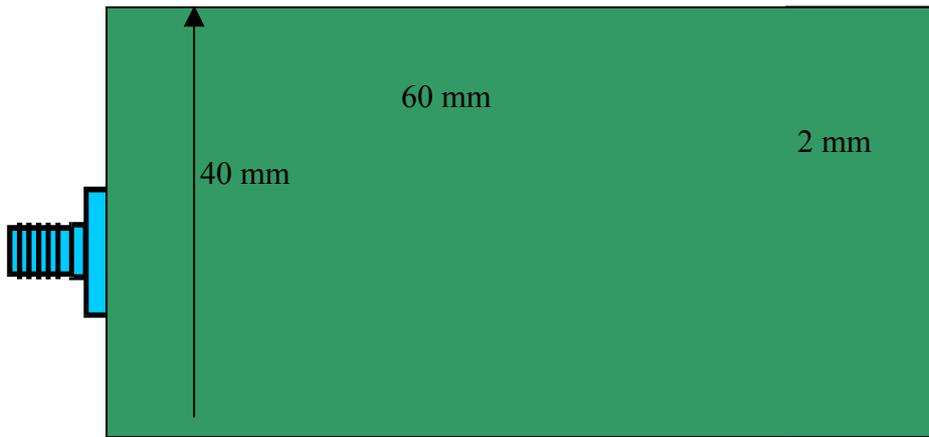

FR-4 PCB thickness = 0.8 mm
 The length of transmission line = 1.35 mm (depends on PCB thickness)

HF R&D	Print date 05/03/04	Preliminary internal use			
		only			June 11, 02
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna	4311 127 00500 AN5000000703032K		Sep. 23, 02	
Grant Lin/Cliff	2002-04-11	Page 3	sheet 190-3		A4
spec.doc	Phycomp Taiwan Ltd.				

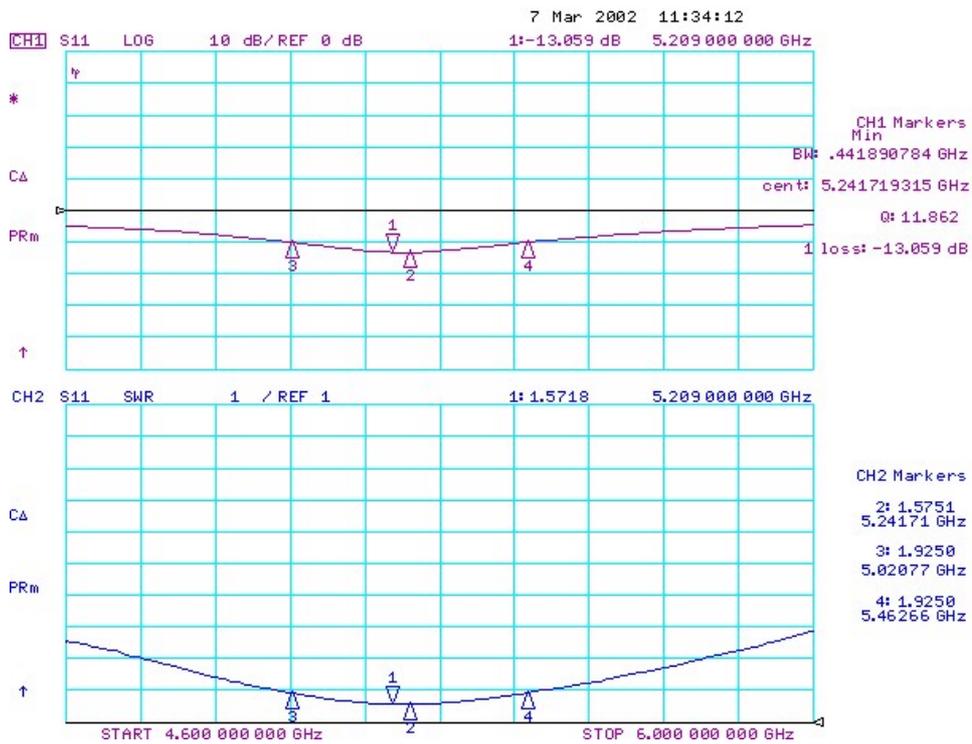

HF R&D	Print date 05/03/04	Preliminary internal use				
		only				
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna	4311 127 00500 AN5000000703032K			June 11, 02	
					Sep. 23, 02	
Grant Lin/Cliff		2002-04-11	Page 4	sheet 190-4		A4
spec.doc	Phycomp Taiwan Ltd.					

RELIABILITY DATA (Reference to IEC Specification)

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.4		Mounting	The antenna can be mounted on printed-circuit boards or ceramic substrates by applying wave soldering, reflow soldering (including vapour phase soldering) or conductive adhesive	No visible damage
4.5		Visual inspection and dimension check	Any applicable method using × 10 magnification	In accordance with specification (chip off 4mm)
4.6.1		Antenna	Central Frequency at 20 °C	Standard test board in page 3
4.8		Adhesion	A force of 3 N applied for 10 s to the line joining the terminations and in a plane parallel to the substrate	No visible damage
4.9		Bond strength of plating on end face	Mounted in accordance with CECC 32 100, paragraph 4.4	No visible damage
			Conditions: bending 0.5 mm at a rate of 1mm/s, radius jig. 340 mm, 2mm warp on FR4 board of 90 mm length	No visible damage

HF R&D	Print date 05/03/04	Preliminary internal use			
		only			
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna	4311 127 00500 AN5000000703032K		June 11, 02	
				Sep. 23, 02	
Grant Lin/Cliff		2002-04-11	Page 5	sheet 190-5	A4
spec.doc	Phycomp Taiwan Ltd.				

IEC 384-10/ CECC 32 100 CLAUSE	IEC 60068-2 TEST METHOD	TEST	PROCEDURE	REQUIREMENTS
4.10	20(Tb)	Resistance to soldering heat	260 ± 5 °C for 10 ± 0.5 s in a static solder bath	The terminations shall be well tinned after recovery and Central Freq. Change ± 6%
		Resistance to leaching	260 ± 5 °C for 30 ± 1 s in a static solder bath	Using visual enlargement of × 10, dissolution of the termination shall not exceed 10%
4.11	20(Ta)	Solderability	Zero hour test, and test after storage (20 to 24 months) in original atmosphere; un-mounted chips completely immersed for 2 ± 0.5 s in 235 ± 5°C.	The termination must be well tinned, at least 75% is well tinned at termination
4.12	4(Na)	Rapid change of temperature	-55 °C (30 minutes) to +125 °C (30 minutes); 100 cycles	No visible damage Central Freq. Change ± 6%
4.14	3(Ca)	Damp heat	500 ± 12 hours at 60 °C; 90 to 95 % RH	No visible damage 2 hours recovery Central Freq. Change ± 6%
4.15		Endurance	500 ± 12 hours at 125 °C;	No visible damage 2 hours recovery Central Freq. Change ± 6%

HF R&D	Print date 05/03/04		Preliminary internal use			
			only			
					June 11, 02	
					Sep. 23, 02	
Grant Lin/Cliff		2002-04-11	Page 6	sheet 190-6		A4
spec.doc	Phycomp Taiwan Ltd.					

ORDERING INFORMATION: Method I- by 12NC Ordering Code

The antennas may be ordered by using the 12 NC ordering code. These code numbers can be determined by the following rules:

4311 1 27 00 500
F C M S T A

F. Family Code

43 = Antenna

C. Packing Type Code

11 = 180 mm/ 7" blister (2000pcs) , **13** = Bulk

M. Materials Code

1 = High Frequency Material

S. Size Code

27 = 2.7 * 3.5 * 0.9 mm

T. Tolerance

00 = larger than 100 M Hz Band Width

A. Working Frequency (three types of antenna are available)

500 = 5 GHz

Example: 12NC 4311 127 00500
 Product description: Antenna (43) by 180 mm blister (11) of High Frequency Material (1), Size 2.7*3.5*0.9 mm (1);
 Tolerance (00) of 100 MHz (VSWR<2)
 Working Frequency (500) = 5G Hz

ORDERING INFORMATION: Method II- by Clear Text Code

The antennas may be ordered by using the 16-digit clear text ordering code. These code numbers can be determined by the following rules:

AN5000000703032K (Clear Text Code Example)						
AN	5000	00	07	0303	2	K
Product	Central Freq.	Bandwidth	Material	Size	Quantities	Packing
AN= Antenna	5000=5GHz	00= >100MHz	07=K7	0303=2.7*3.5*0.9 mm	2 = 2K	K=7" plastic B = Bulk

HF R&D	Print date 05/03/04		Preliminary internal use			
			only			
	Multilayer Ceramic Antenna for 5GHz Wideband Antenna		4311 127 00500 AN5000000703032K		June 11, 02	
					Sep. 23, 02	
Grant Lin/Cliff		2002-04-11	Page 7	sheet 190-7		A4
spec.doc	Phycomp Taiwan Ltd.					