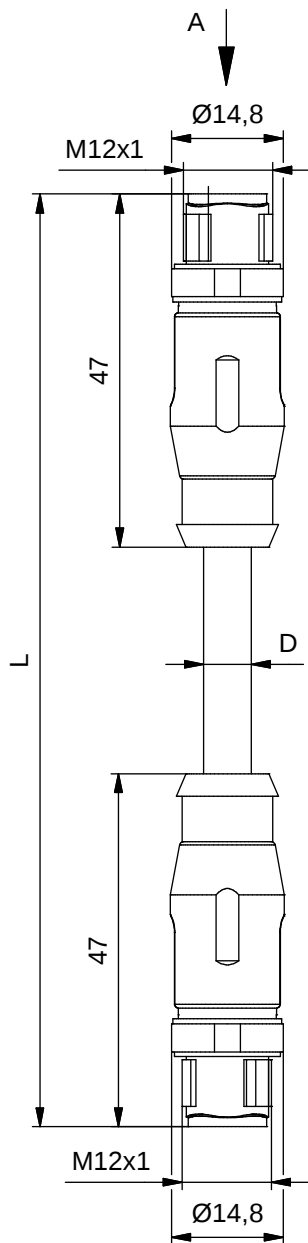




Technical specification:

Rated voltage: IEC 61076-2-109	48 V
Current rating: IEC 61076-2-109	500 mA at 40°C
Transmission properties: ISO IEC 11801	10 Gigabit Ethernet CAT6
Surge voltage category:	II
Pollution degree: IEC 60664-1	3
Degree of protection: IEC 60529	IP 67, in mated condition
Temperature range: IEC 60664-1	-25°C ... +85°C
Mating cycles: IEC 60512-9a	>=100

Materials:


Contact:	CuSn
Contact plating:	Nickel, gold plated
Contact carrier:	PPA
Coupling screw:	GD-Zn, nickel plated
Moulding body:	TPU, UL 94, grey

Contact assignment:

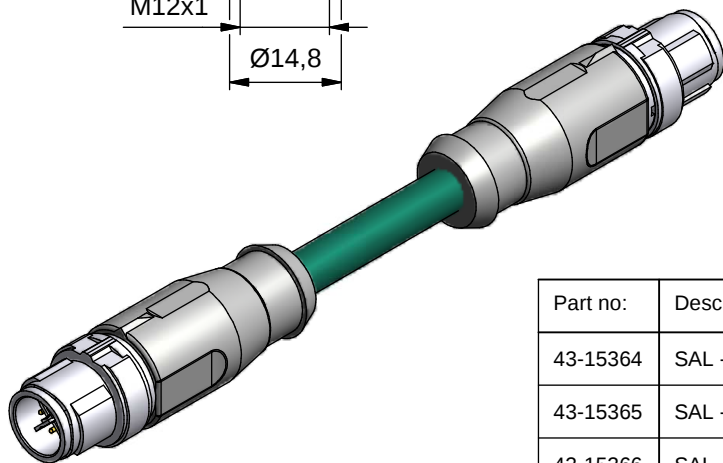

Part no:	Description:	Length L:	Cable:
43-15364	SAL - 12X - RS8.8 - RS8.8 / 1 / GG	1m	TPU, water blue (RAL 5021), 4x2xAWG26/7; S-FTP Kabel: 781-GG180T
43-15365	SAL - 12X - RS8.8 - RS8.8 / 2 / GG	2m	
43-15366	SAL - 12X - RS8.8 - RS8.8 / 5 / GG	5m	
43-15367	SAL - 12X - RS8.8 - RS8.8 / 10 / GG	10m	
43-xxxxx	SAL - 12X - RS8.8 - RS8.8 / ... / GG	x	

D see data sheep cable

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant			 dim. in mm		title: Connecting cable, male connector M12x1 X-coded
			date	name	
	tolerance of cable: L <= 4m: L + 40mm L > 4m: L + 1%	drawn	29.09.11	Kniesburges	dwg no: 43K1A1473
		appd.	05.10.11	Mankopf	
	general tolerance:	0 ± 0,50mm 0,0 ± 0,25mm 0,00 ± 0,10mm			part no: see table
	THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH				

CONEC®