

Number of contacts

20–100



Male connectors for IDC discrete wire, straight

Identification	No. of contacts	Part No.
Male connectors with insulation displacement termination for discrete wire AWG 28/30	20	60 03 020 52 ...
	26	60 03 026 52 ...
	50	60 03 050 52 ...
	68	60 03 068 52 ...
	100	60 03 100 52 ...
Insulation diameter (mm)	00	
	05	
	10	
	15	
	20	

A manual for the *har-mik*[®] connector and cable assembly is available in our online catalogue *HARKIS*[®] or on demand at your local HARTING representative.




Available sizes

	Part No.	Ø	20	26	50	68	100
Male	60 03 ... 5200	0.50–0.65	●	●	●		
	60 03 ... 5205	0.50–0.75				●	
	60 03 ... 5210	0.65–0.80	●		●		●
	60 03 ... 5215	0.75–0.90				●	
	60 03 ... 5220	0.80–0.88	●	●	●		

● = Available sizes


Dimensions

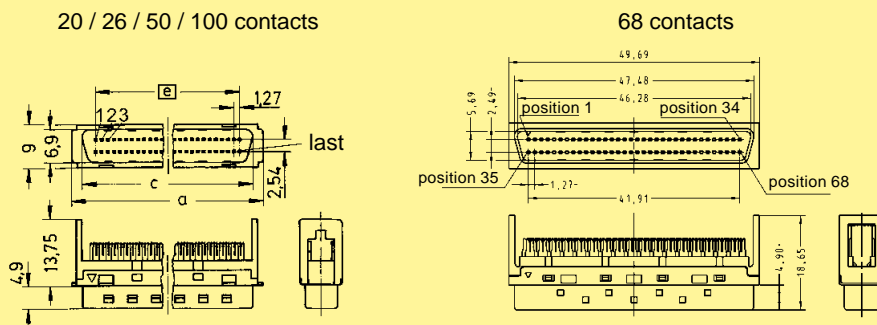

	a	c	d	e
20	21.25	17.00	16.75	11.43
26	25.06	20.81	20.56	15.24
50	40.30	36.05	35.80	30.48
100	72.05	67.80	67.55	62.23

Comb cover

(delivered with connectors)

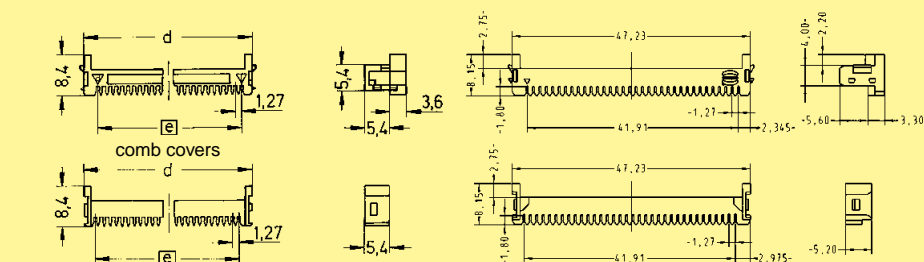

Dimensions in mm