

Number of contacts

14–68

Male connectors for IDC discrete wire, straight



Identification	No. of contacts	Part No.
Male connectors with insulation displacement termination for discrete wire AWG 28/30	14	60 13 014 52
	20	60 13 020 52
	26	60 13 026 52
	36	60 13 036 52
	50	60 13 050 52
	68	60 13 068 52
Insulation diameter (mm)		
Ø = 0.50–0.65	00	
Ø = 0.50–0.75	05	
Ø = 0.75–0.90	15	


Available sizes

	Part No.	Ø	14	20	26	36	50	68
Male	60 13 ... 5200	0.50–0.65		●			●	●
	60 13 ... 5205	0.50–0.75	●		●	●		
	60 13 ... 5215	0.75–0.90	●		●	●		


● = Available sizes

Dimensions for male connectors


20 / 50 / 68 poles

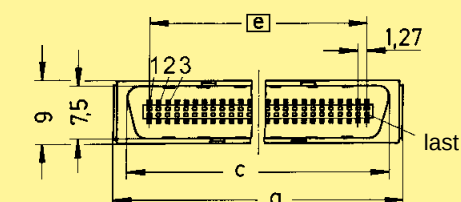

	a	c	e
20	21.24	17.55	11.43
50	40.29	36.60	30.48
68	51.72	48.03	41.91



comb covers

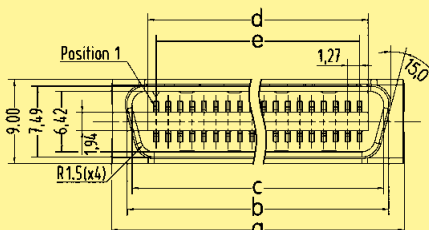

	a	b	c	d	e
14	17.10	13.84	12.78	9.42	7.62
26	24.95	21.46	20.40	17.00	15.24
36	31.35	27.81	26.75	23.39	21.59



14 / 26 / 36 poles

A manual for the har-mik® connector and cable assembly is available in our online catalogue HARKIS® or on demand at your local HARTING representative.

Dimensions in mm