

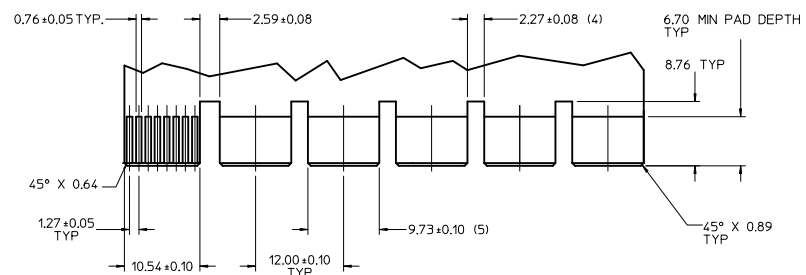


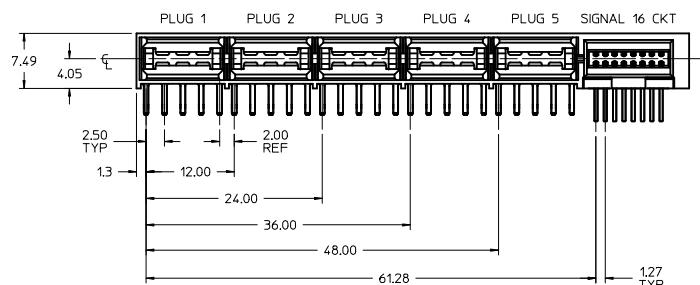


20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

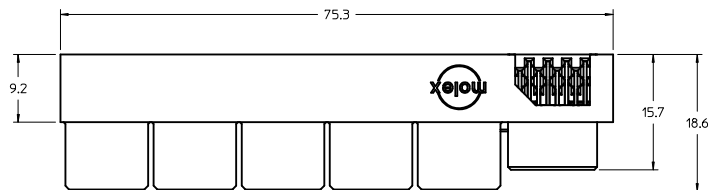

RECOMMENDED
CARD EDGE LAYOUT
THICKNESS: 157/.062

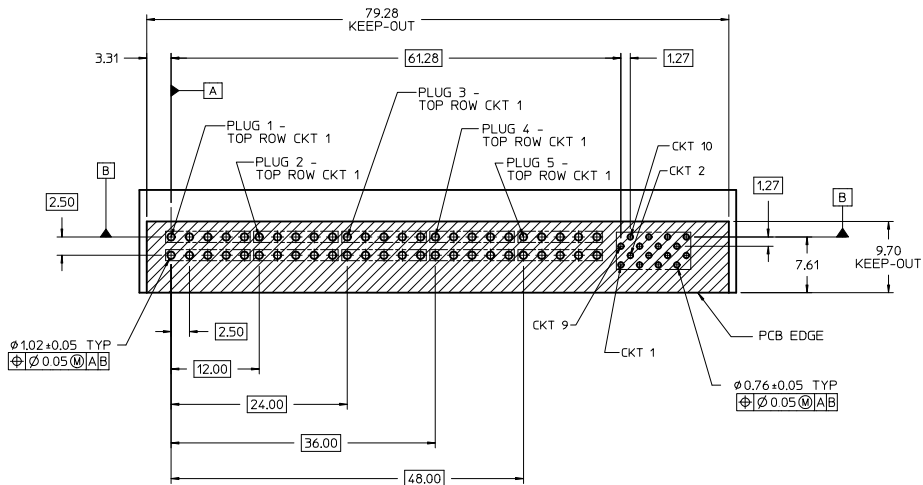

RECOMMENDED PCB LAYOUT
COMPONENT SIDE
PCB THICKNESS: 2.36/.093

NOTES:

1. MATERIAL HOUSING: GLASS FILLED LCP (LIQUID CRYSTAL POLYMER), 94V-0, COLOR-BLACK
CONTACT: COPPER ALLOY
2. FINISH: SELECT GOLD - .76μ M/30μ IN MINIMUM CONTACT
SELECT TIN - 3.81μ M/150μ IN MINIMUM TAIL
BOTH OVER NICKEL - 1.27μ M/50μ IN MINIMUM
3. POWER TERMINALS LUBRICATED IN CONTACT AREA
4. PRODUCT SPECIFICATION: PS-45984-001
5. PACKAGING: TRAY PER PK-45984-001
6. PARTS ARE RoHS COMPLIANT
7. MATES TO 157/.062 CARD EDGE OR MOLEX P/N 45985-1***

ADD CKT DESIGNATION EC NO: UCP2012-1936 DRAWN: JUILLES 2011/12/15 CHKD: BANDURA 2011/12/19 APPR: APATEL 2012/01/05	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.13 ± --- 1 PLACE ± 0.25 ± --- ANGULAR ±1/2°	DIMENSION STYLE MM ONLY DRAWN BY DATE BANDURA 10/13/2009 CHECKED BY DATE BANDURA 10/15/2009 APPROVED BY DATE PATEL 2010/06/03	SCALE 3:1 DESIGN UNITS METRIC THIRD ANGLE PROJECTION	TITLE RECEPTACLE ASSEMBLY LPH REVERSE ORIENTATION 10-POWER 16-SIGNAL	MATERIAL NO. 45984-0007 DOCUMENT NO. SD-45984-007	SHEET NO. 1 OF 1