
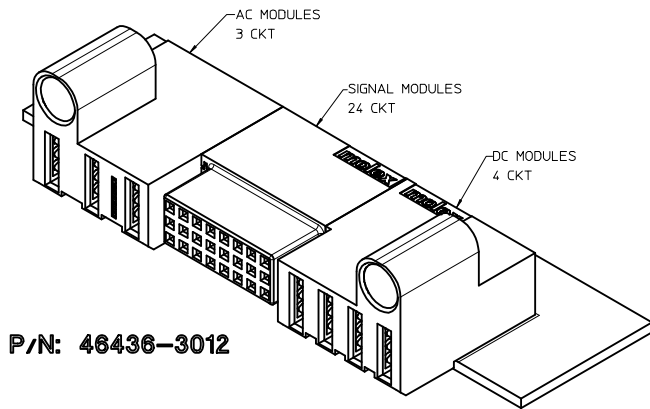
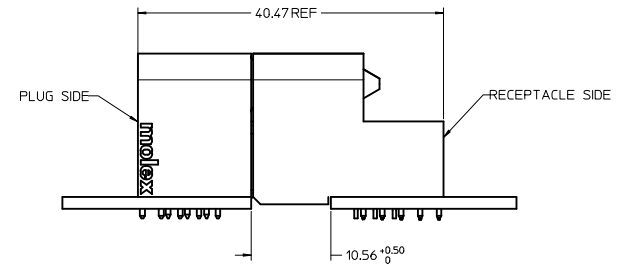


RECOMMENDED PC BOARD LAYOUT & KEEP-OUT ZONE

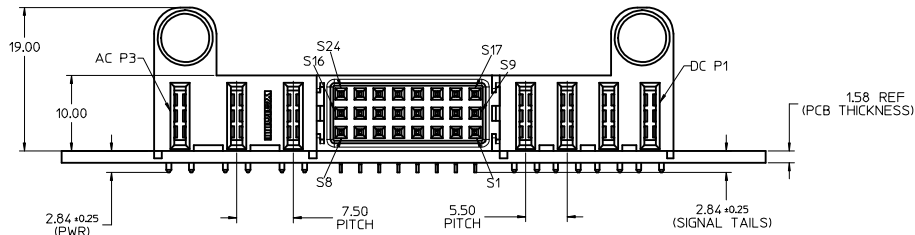

P/N: 46436-3012

NOTES:

- MATERIAL:
 - HOUSINGS: LCP UL94, V-0, COLOR: BLACK.
 - TERMINALS: COPPER ALLOY.
 - PLATING: 0.00127 NICKEL OVERALL WITH 0.00254 SELECTIVE TIN ON SOLDER TAILS AND 0.000762 SELECTIVE GOLD ON CONTACT AREA.
- ASSEMBLIES PACKED IN TRAYS. SFG: TBD
- PC BOARD REQUIRES SOLDER THRU HOLES. REFER TO PS-46436-100 FOR DETAILS
- PRODUCT SPEC: PS-46436-100.
- APPLICATION SPEC: AS-46436-100.
- PRODUCT TO MEET RoHS REQUIREMENTS.
- ASSEMBLY MATES TO MOLEX PLUG ASSEMBLY P/N 46437-3012.

RELEASED IEC NO: UCP2009-2546 2009/05/05 DRWN: JUILLES 2009/05/05 CHKD: KJKOH 2009/05/05 APPR: APATEL 2009/05/05	DESCRIPTION RA RECEPT ASSY TEN60 POWER, TOP GUIDES TG-4P-24S-3AC-TG	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE NTS	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY KJKOH	DATE 2009/03/11	TITLE				
		4 PLACES ±---		±---	CHECKED BY KJKOH	DATE 2009/03/11	MOLEX INCORPORATED					
		3 PLACES ±---		±---	APPROVED BY SHONG	DATE	MATERIAL NO. 46436-3012		DOCUMENT NO. SD-46436-312		SHEET NO. 1 OF 1	
2 PLACES ±0.25		±---	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					
1 PLACE ±0.25		±---										