




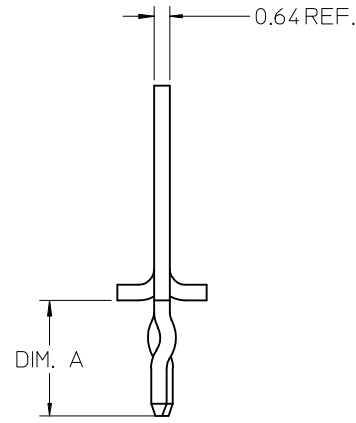


MATERIAL P/N	PCB THK.	DIM. A
46548-0001	---	3.60
46548-0002	---	4.18
46548-0003	---	4.57

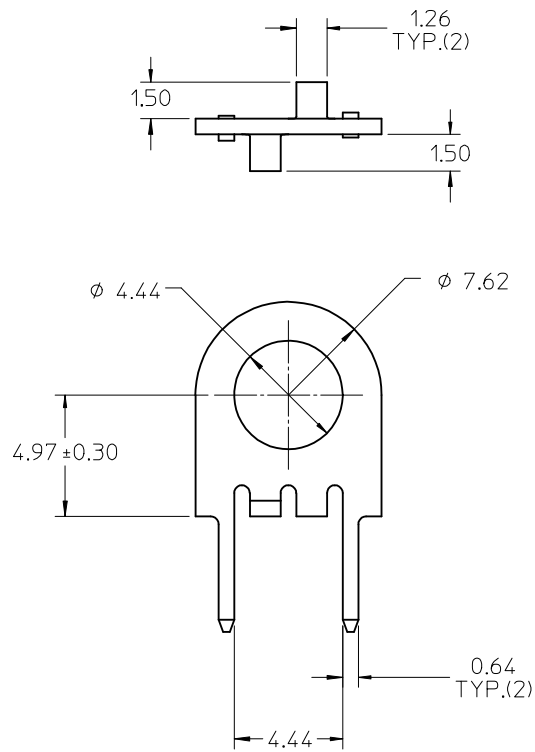

HEATSINK HOOK, INSTALLATION PROCESS

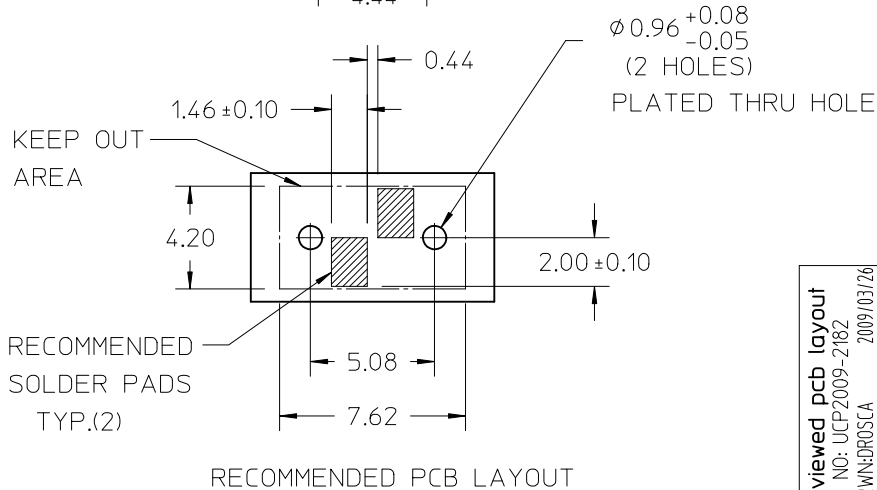

RECOMMENDED PCB LAYOUT

NOTES:

1. MATERIAL: ALLOY 260 BRASS
2. PLATING: TIN 2.54μ OVER NICKEL 127μ
3. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002

reviewed pcb layout EC NO: UCP2009-2182 DRAWN: DROSCA CHKD: JCOMERC I APPR: JCOMERC I B1	2009/03/26 2009/03/26 2009/03/26 2009/03/26	QUALITY SYMBOLS DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 5:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY DROSCA	DATE 04/26/2007	TITLE HEATSINK HOOK				
			4 PLACES	± ---	± ---	CHECKED BY JCOMERC I	DATE 04/26/2007					
			3 PLACES	± ---	± ---	APPROVED BY JCOMERC I	DATE 04/26/2007	MOLEX MOLEX INCORPORATED DOCUMENT NO. SD-46548-001 SHEET NO. 1 OF 1				
			2 PLACES	± 0.25	± ---							
			1 PLACE	± 0.5	± ---							
			ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE					
				SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						