



RUE SAINT-HENRI 11, P.O. BOX 834 - CH-2800 DELÉMONT / SWITZERLAND

## Your selected product

### Headers - Solder cup

Series 480

**480-PP-2NN-00-001101**

Double Row

2.54 mm, Solder cup

PCB header strips for wiring application with solder tail / connecting pin.

### Technical specs.:

**Insulator:** Black glass filled polyester PCT-GF30-FR

**Flammability:** UL 94V-O

**Contact:** Brass CuZn36Pb3 (C36000)



**Connecting pin Ø:** 0.5 mm

**Mechanical life:** Min. 100 cycles

**Rated current:** 3 A

**Contact resistance:** Max. 10 mΩ

**Dielectric strength:** Min. 1000 V RMS

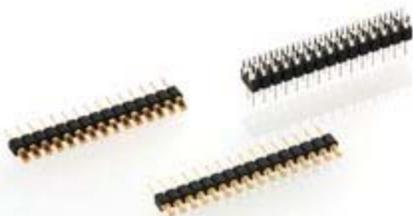

## Ordering information RoHS-compliant parts

PP Plating code	Termination	Connecting pin
10	Gold 0.25 $\mu\text{m}$	Gold 0.25 $\mu\text{m}$
80	Tin	Tin

**NN number of poles.** Replace **NN** with the requested number of poles, e.g. 460-10-2**NN**-00-001101 for a double row version with 16 pins becomes 460-10-2**16**-00-001101.

[General technical specs.](#) [View CAD](#)

---

### 480-PP-2NN-00-001101

Solder cup strip with solder tail /connecting pin: **double row.**

Availability from: 4 to 72 contacts.

Standard number of contacts 72.

---

