

MICRO SWITCH

A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS

FED. MFR. CODE 91929

SWITCH - BASIC

CATALOG LISTING

4 HS12

4 HS12

M

DRAWING
NUMBER

ISSUE
3 10
X 2021

ISSUE

(M) 4 HS12
ISSUE 8

PAGE 1 OF 1
RELEASE NO. PR-2350

REPLACES

CHECK

REVISIONS

A CO-94122
TSM
12 MAR 99

CHECK

6 MAY 61

REF

CHECK

6 MAY 61

REF

CHECK

6 MAY 61

REF

CHECK

6 MAY 61

REF

CHECK

6 MAY 61

REF

CHECK

6 MAY 61

REF

CHECK


6 MAY 61

REF

CHECK

6 MAY 61

REF

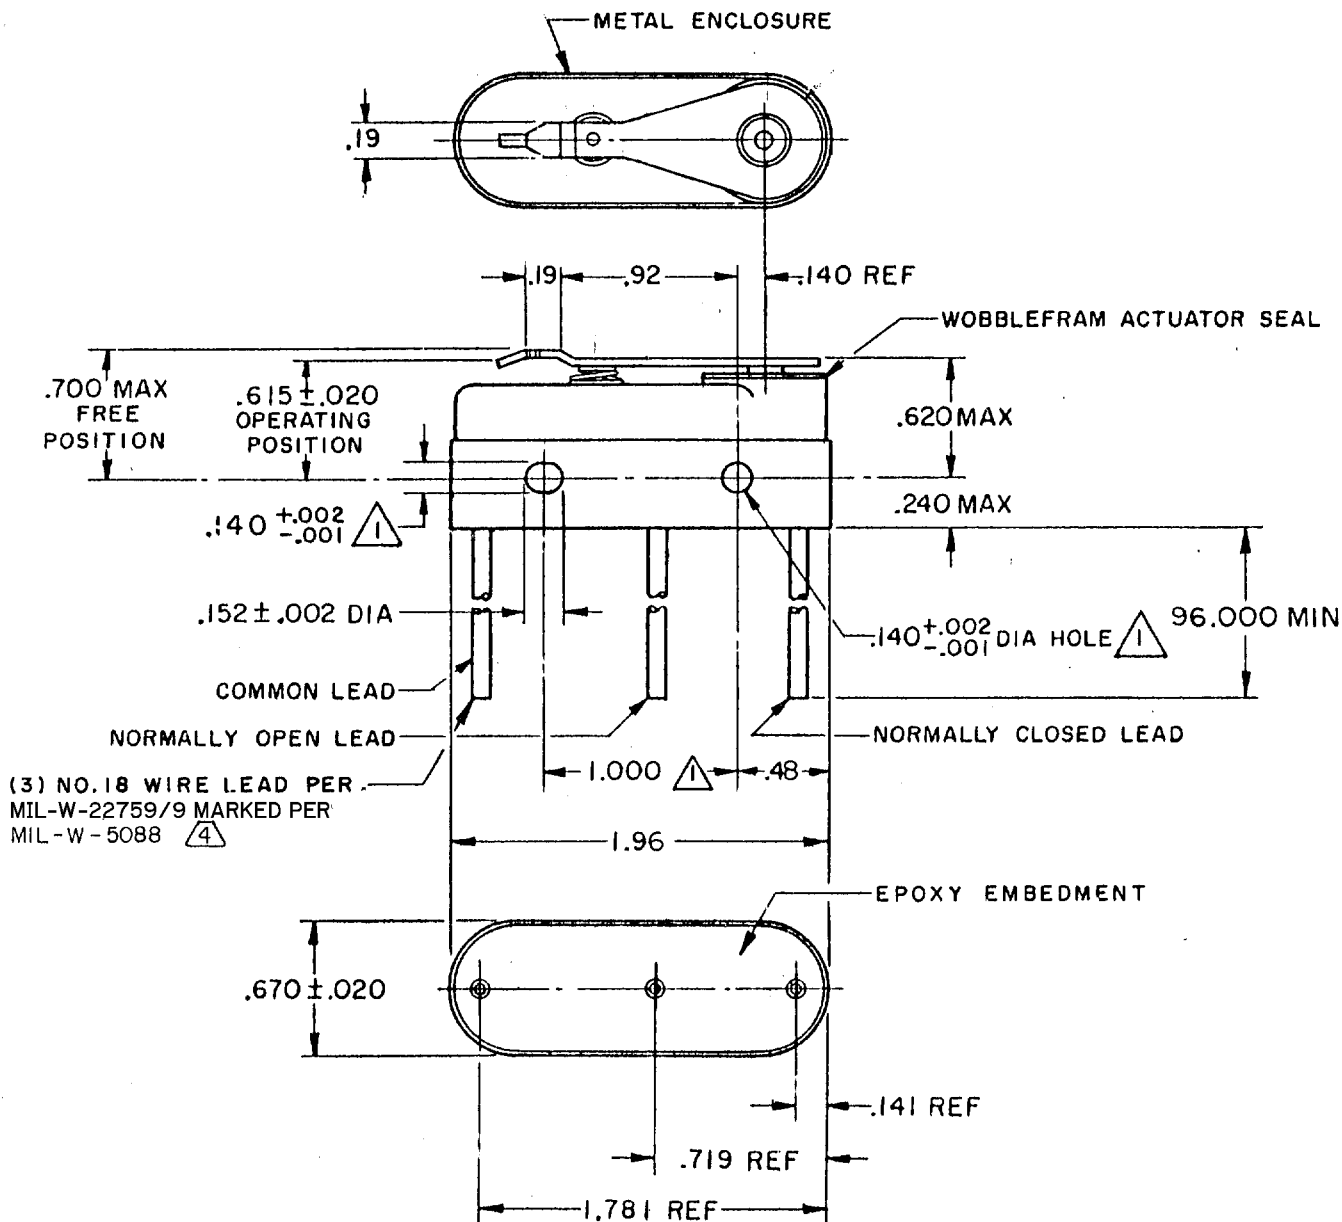

NOTE -

- 1 - MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
- 2 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM MINUS 65° F TO PLUS 250° F
- 3 - WEIGHT OF SWITCH ONLY IS 1.5 OZ MAX. WEIGHT OF CONDUCTOR GROUP ONLY IS 0.5 OZ MAX PER FOOT
- 4 - WIRING CONNECTIONS: COMMON-----MARKED "COMMON"
NORMALLY CLOSED---MARKED "WHITE/RED"
NORMALLY OPEN---MARKED "BLUE"

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS		ELECTRICAL DATA			SCALE FULL		
OPERATING FORCE — — — — 18-28 OZ		CONTACT ARRANGEMENT S P D T				DO NOT SCALE PRINT	
RELEASE FORCE — — — — — 4 OZ MIN		LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ±.030 TWO PLACE (.00) ±.015 THREE PLACE (.000) ±.005 ANGLES ±		
PRETRAVEL — — — — — .085 MAX							
DIFFERENTIAL TRAVEL — — — .020 MAX		28 VDC 125 VAC	8 AMP 1 AMP	15 AMP .5 AMP			
OVERTRAVEL — — — — — .010 MIN							
					WEIGHT 		

FO-50378
FORMTEK

O MW 27 APR 61