

MICRO SWITCH
a Honeywell Division

FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

4HS155-320

CATALOG LISTING
4HS155-320

PAGE 1 OF 1

ISSUE
M

4

REPLACES

RELEASE NO. PR-21159

CHECK

CHECK

REVISIONS

A	CO-77846
D	8 SEP 94
B	CO-94122
TSM	17 MAR 99

CHECK

6 JUN 94

AW


CHECK

3 JUN 94

TSM

DRAWN

FORMTEK

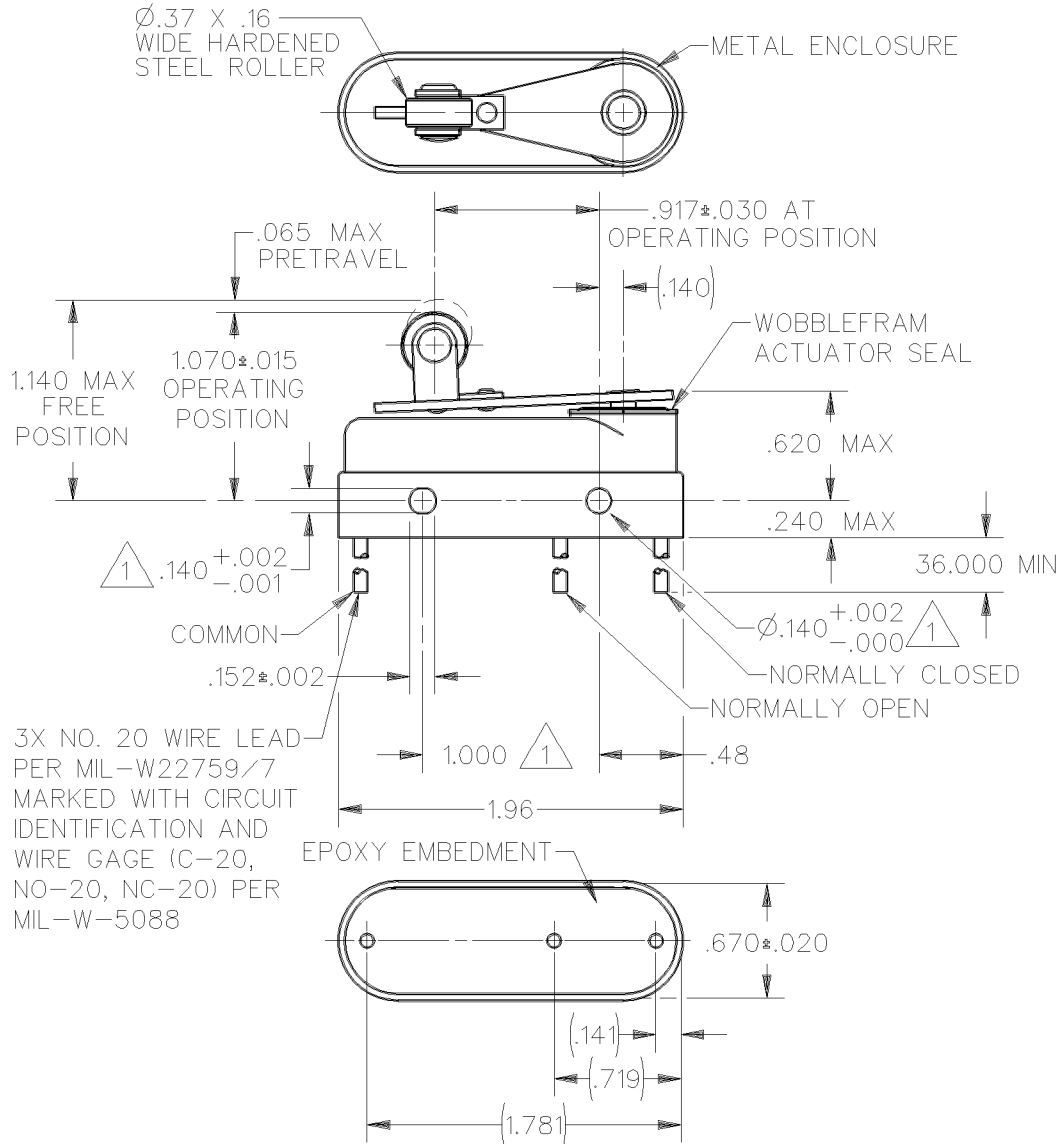

NOTES

- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.139 MAX ON 1.000±.002 CENTERS
- 2 - FOR USE IN AMBIENT TEMPERATURE RANGE FROM -65°F TO +250°F
- 3 WEIGHT OF SWITCH ONLY IS 1.7 OZ MAX WEIGHT OF CONDUCTOR GROUP ONLY IS 0.5 MAX PER FOOT

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS	ELECTRICAL DATA			SCALE	FULL	DO NOT SCALE PRINT
OPERATING FORCE — — — 10-22 OZ	CONTACT ARRANGEMENT			UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		
DIFFERENTIAL TRAVEL — — — .020 MAX	S P D T					
RELEASE FORCE — — — 4 OZ MIN	LINE VOLTAGE	INDUCTIVE LOAD	RESISTIVE LOAD	ONE PLACE (.0)	±.030	
OVERTRAVEL — — — — .032 MIN	28 VDC	8 AMP	10 AMP	TWO PLACE (.00)	±.015	
	125 VAC	1 AMP	.5 AMP	THREE PLACE (.000)	±.005	
				ANGLES	±	
				WEIGHT	3	