

**MICRO SWITCH**FREEPORT, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL

FED. MFG. CODE 91929

**ASSEMBLY-
PUSHBUTTON SWITCH**

CATALOG LISTING

4PB11-T2**4PB11-T2**

PAGE 1 OF 1

MDRAWING
NUMBER

8

ISSUE

REPLACES

RELEASE NO.

CHECK

28 OCT 98

JAF

CHECK

3 FEB 65

LSD

CHECK

20 JAN 65

REVISIONS

A	CO 19800	MBF	20 JAN 65
B	CO 93593	PPF	28 OCT 98
C	0018500	PM	23 FEB 06

JAF

CHECK

3 FEB 65

LSD

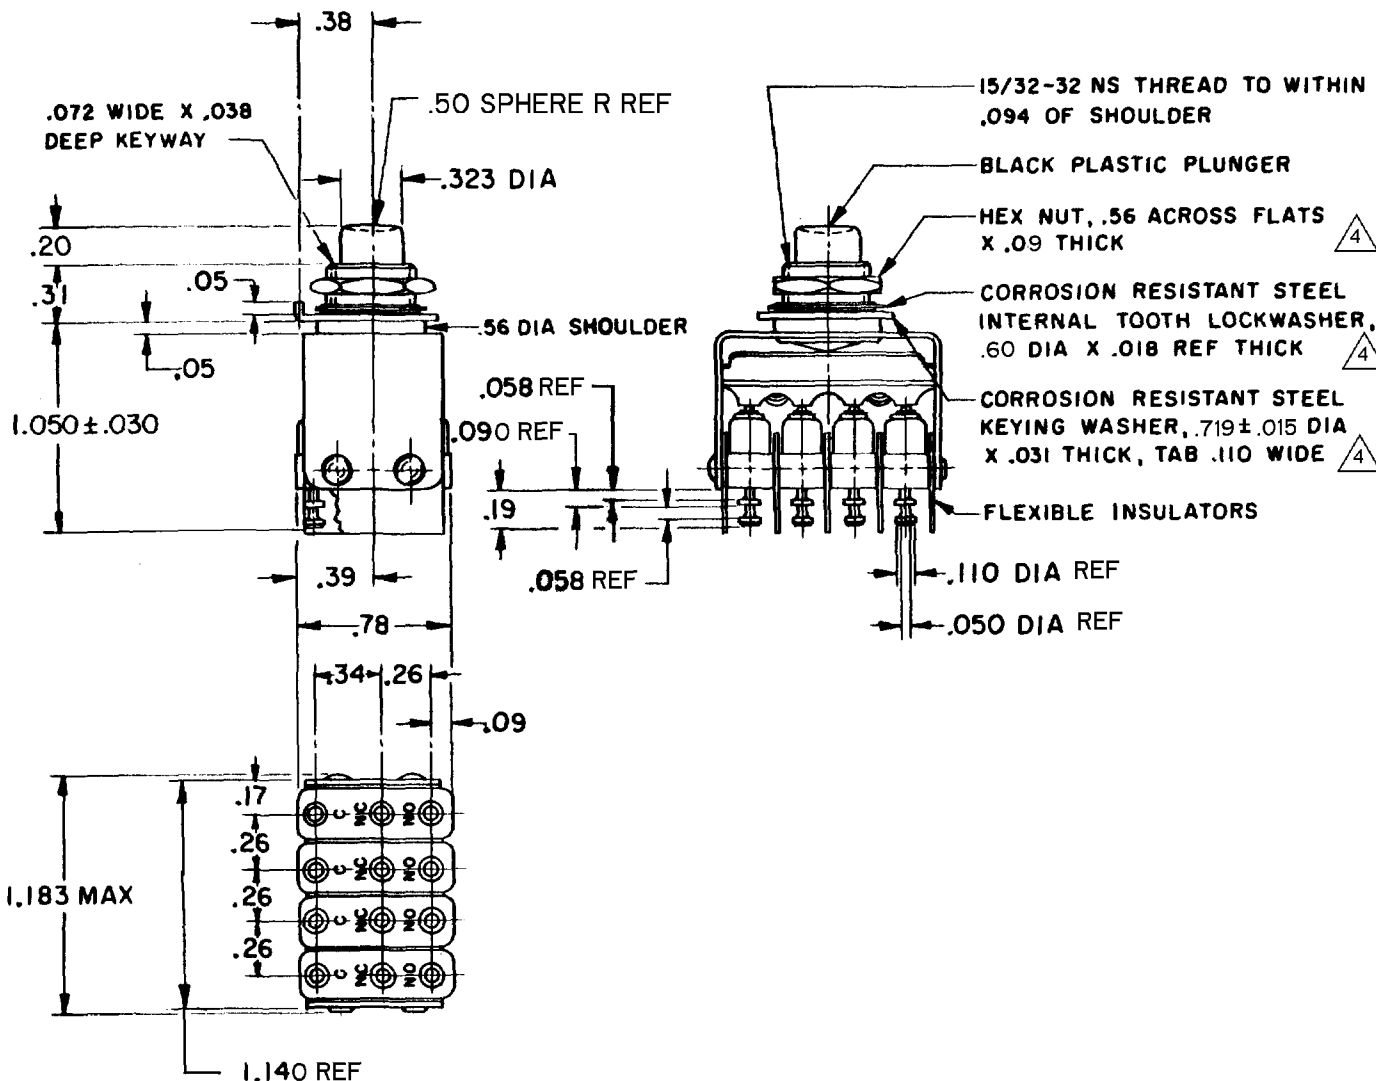
CHECK

20 JAN 65

DRAWN

FORMTEK

FO-90378

**NOTES**

- 1- UNIT INCLUDES "IISM" TYPE BASIC SWITCH (4)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

4 MOUNTING HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS

OPERATING FORCE — — 35 OZ APPROX
TOTAL TRAVEL — — — .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (4)

250 VAC — — — — — 5 AMP
30 VOLTS DC RATING
INDUCTIVE — — — — — SEA LEVEL — — — 3 AMP
50,000 FT — — — 2.5 AMP
RESISTIVE — — — — — SEA LEVEL — — — 5 AMP
50,000 FT — — — 5 AMP
MAXIMUM INRUSH — — — — — 24 AMP

SCALE

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED

DIMENSIONS ARE IN INCHES

TOLERANCES ARE:

ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT