

MICRO SWITCHFREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL

FED MFG CODE 91089

**ASSEMBLY -
PUSHBUTTON SWITCH**

CATALOG LISTING

4PB210-T2**M** 4PB210-T2
PAGE 1 OF 1DRAWING
NUMBER

7

ISSUE

REPLACES

PR-6497

29 OCT 98

JAF

CHECK

73

CMA

19 OCT 73

JAF

CHECK

73

DAW

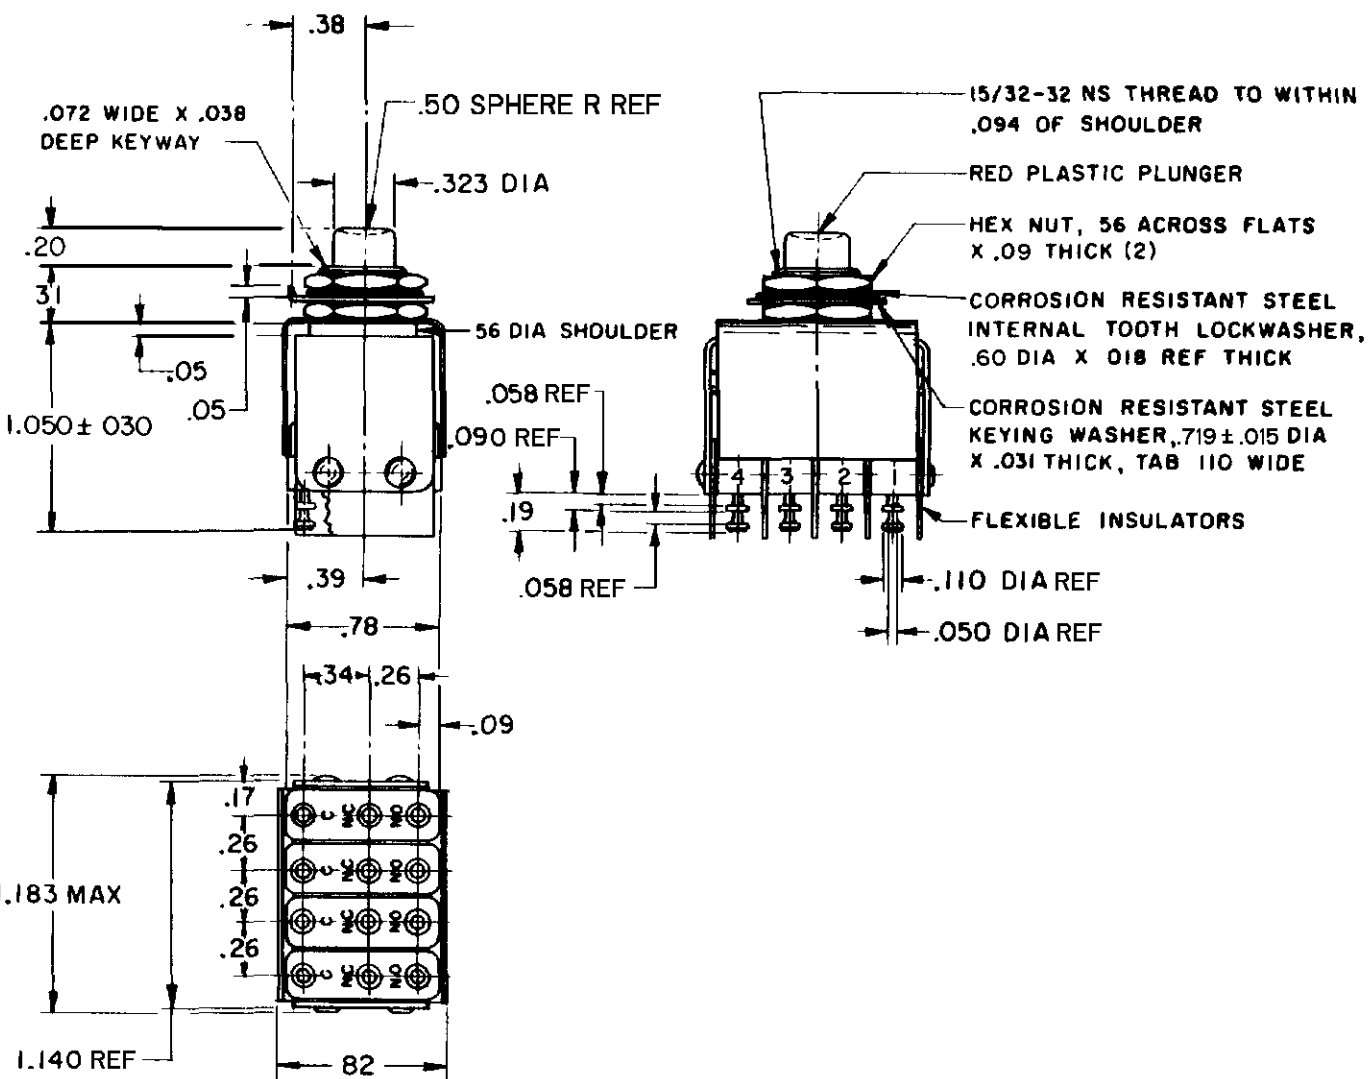
19 OCT 73

CHECK

DAW

19 OCT 73

DAW

**NOTES**

- 1- UNIT INCLUDES "ISM" TYPE BASIC SWITCH (4)
- 2- TERMINALS ARE PLATED FOR SOLDERING
- 3- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICSOPERATING FORCE - - - - 35 OZ APPROX
TOTAL TRAVEL - - - - - .100 APPROX**ELECTRICAL DATA**CONTACT ARRANGEMENT
S P D T (4)**250 VAC - - - - - 5 AMP**
30 VOLTS DC RATING
INDUCTIVE - - - - - SEA LEVEL - - 3 AMP
50,000 FT - - 2.6 AMP
RESISTIVE - - - - - SEA LEVEL - - 6 AMP
50,000 FT - - 6 AMP
MAXIMUM INRUSH - - - - - 24 AMP**SCALE FULL**

DO NOT SCALE PRINT

UNLESS OTHERWISE
NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE

ONE PLACE (.01) ± .030

TWO PLACE (.00) ± .015

THREE PLACE (.000) ± .005

ANGLES ±

WEIGHT

FORMTEK

FO-52848

DRAWN