

|                                      |  |                                     |  |                          |  |
|--------------------------------------|--|-------------------------------------|--|--------------------------|--|
| <b>CHARACTERISTICS</b>               |  | <b>ELECTRICAL DATA</b>              |  | <b>SCALE FULL</b>        |  |
| OPERATING FORCE--35 OZ APPROX        |  | CONTACT ARRANGEMENT<br>S P D T (4X) |  | DO NOT SCALE PRINT       |  |
|                                      |  | SILVER CONTACT RATING               |  | GOLD CONTACT RATING      |  |
| 250 VAC ----- 5 AMP                  |  |                                     |  |                          |  |
| 30 VOLTS DC RATING                   |  |                                     |  |                          |  |
| INDUCTIVE -----SEA LEVEL ----- 3 AMP |  | 1/2 AMP                             |  |                          |  |
| 50,000 FT ----- 2.5 AMP              |  | 1/2 AMP                             |  |                          |  |
| RESISTIVE -----SEA LEVEL ----- 5 AMP |  | 1 AMP                               |  |                          |  |
| 50,000 FT ----- 5 AMP                |  | 1 AMP                               |  |                          |  |
| MAXIMUM INRUSH ----- 24 AMP          |  | 2 AMP                               |  |                          |  |
|                                      |  |                                     |  | UNLESS OTHERWISE NOTED   |  |
|                                      |  |                                     |  | DIMENSIONS ARE IN INCHES |  |
|                                      |  |                                     |  | TOLERANCES ARE:          |  |
|                                      |  |                                     |  | ONE PLACE (.0) ±.030     |  |
|                                      |  |                                     |  | TWO PLACE (.00) ±.015    |  |
|                                      |  |                                     |  | THREE PLACE (.000) ±.005 |  |
|                                      |  |                                     |  | ANGLES ±                 |  |
|                                      |  |                                     |  | WEIGHT                   |  |



**MICRO SWITCH**  
FREEPORT, ILLINOIS, U.S.A.  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

# ASSEMBLY- PUSHBUTTON SWITCH

CATALOG LISTING  
**4PB364-T**

4PB364-T

M

DRAWING  
NUMBER

2

X

ISSUE

3

REPLACES

RELEASE NO. SR-10885

CHECK

REVISIONS

A

CO18544

VDF

18 OCT 63

B

CO19800

M B F

14 JAN 65

27 MAR 63

KAC

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK

27 MAR 63

DAW

CHECK



27 MAR 63

DAW

CHECK

27 MAR 63

DAW

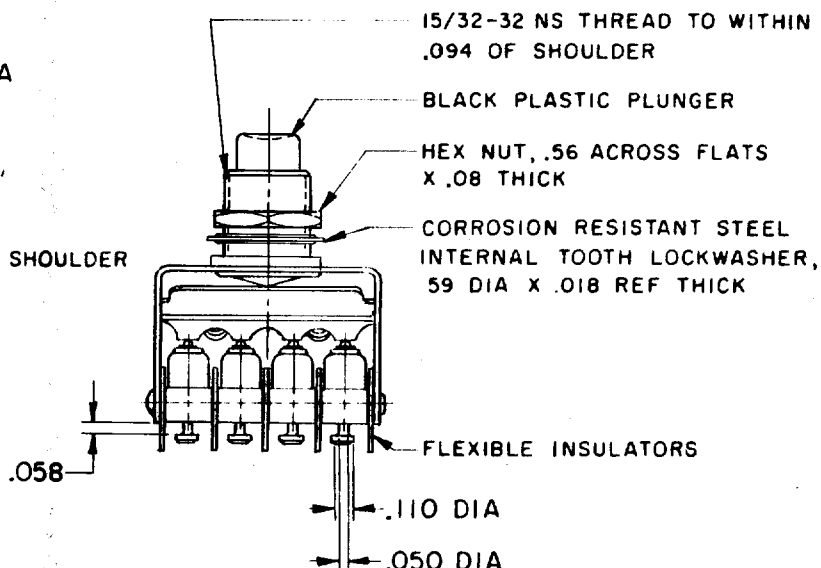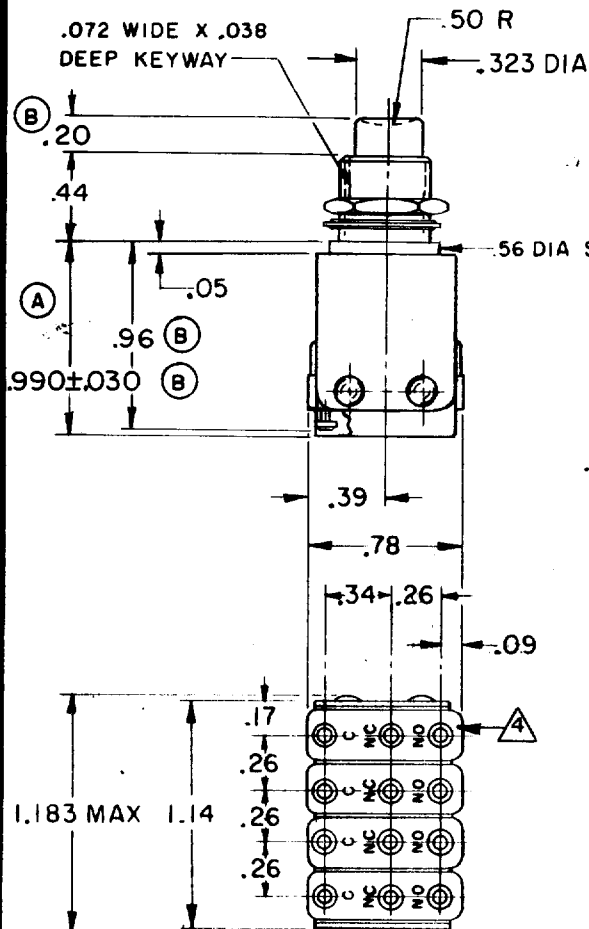

## NOTE -

- 1-(3)"IISM" TYPE BASICS WITH SILVER CONTACTS AND (1) "IISM" TYPE WITH GOLD CONTACTS
- 2-SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3-TERMINALS ARE PLATED FOR SOLDERING
- 4 IISM TYPE BASIC SWITCH WITH 24 K SOLID GOLD CONTACTS IS IDENTIFIED BY YELLOW SPOT ON BOTTOM OF SWITCH
- 5-UNIT WILL OPERATE SATISFACTORILY IN TEMPERATURES FROM MINUS 85°F TO PLUS 310°F

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

## CHARACTERISTICS

OPERATING FORCE--35 OZ APPROX

## ELECTRICAL DATA

CONTACT ARRANGEMENT  
S P D T (4)

### SILVER CONTACT RATING

250 VAC ----- 5 AMP

30 VOLTS DC RATING

INDUCTIVE ----- SEA LEVEL ----- 3 AMP

50,000 FT ----- 2.5 AMP

RESISTIVE ----- SEA LEVEL ----- 5 AMP

50,000 FT ----- 5 AMP

MAXIMUM INRUSH ----- 24 AMP

### GOLD CONTACT RATING

1/2 AMP

1/2 AMP

1 AMP

1 AMP

2 AMP

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE NOTED  
DIMENSIONS ARE IN INCHES

## TOLERANCES ARE:

ONE PLACE (.0) ±.030  
TWO PLACE (.00) ±.015  
THREE PLACE (.000) ±.005  
ANGLES ±

WEIGHT

FO-30378