

FED. MFG. CODE 91929

ASSEMBLY- SWITCH

4AC79

4AC79

REPLACES

RELEASE NO. PR-8156

M

DRAWING
NUMBER

CHECK

REVISIONS

A C058622

TSK
19 DEC 85

B 0000941

JAH
24JUL03

CHECK

79

9

12

7962

00.


A

RASTER

DRAWN

PUSH TO OPERATE-RETURNS AUTOMATICALLY
TO POSITION SHOWN

PULL TO OPERATE-REMAINS IN OPERATED POSITION UNTIL RESET FOR AUTOMATIC RETURN BY NEXT FULL STROKE "PUSH" OPERATION

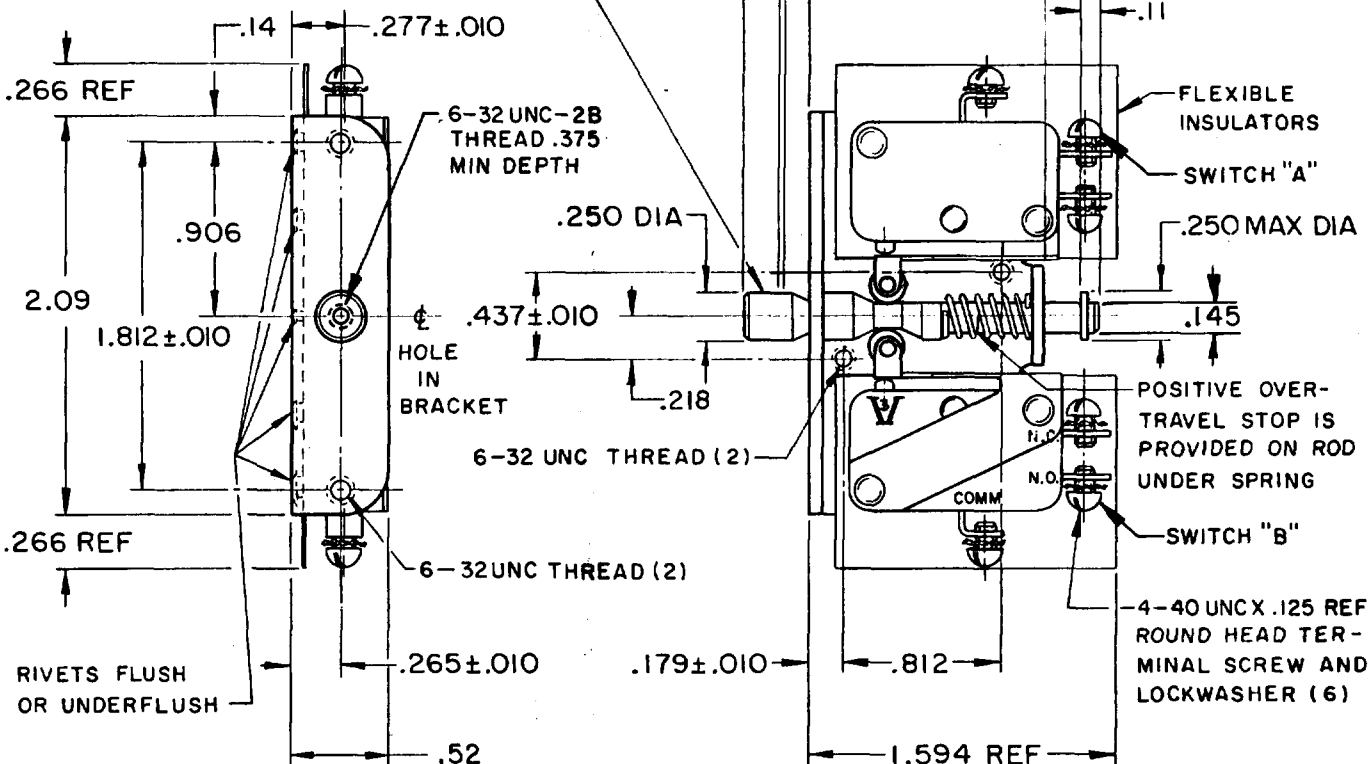


NOTE -

- 1- UNIT INCLUDES CAT. LIST. V3-TYPE BASIC SWITCH (2)
- 2- SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
- 3- NOTCH IN ACTUATOR ROD WILL PERMIT .035 DISPLACEMENT BETWEEN END OF ROD AND HOLE IN BRACKET
- 4- PLASTIC PARTS ARE MADE OF MINERAL FILLED PHENOLICS
- 5- SWITCHES "A" AND "B" OPERATE ON PUSH STROKE OF ACTUATOR ROD
- 6- SWITCH "B" ONLY OPERATES ON PULL STROKE OF ACTUATOR ROD

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

ELECTRICAL DATA

SCALE FULL

TOTAL TRAVEL

.250 APPROX PUSH DIRECTION
.187 APPROX PUSH DIRECTION

CONTACT ARRANGEMENT

ACT ARRAYS

5	6
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	51
52	52
53	53
54	54
55	55
56	56
57	57
58	58
59	59
60	60
61	61
62	62
63	63
64	64
65	65
66	66
67	67
68	68
69	69
70	70
71	71
72	72
73	73
74	74
75	75
76	76
77	77
78	78
79	79
80	80
81	81
82	82
83	83
84	84
85	85
86	86
87	87
88	88
89	89
90	90
91	91
92	92
93	93
94	94
95	95
96	96
97	97
98	98
99	99
100	100

15A-1/3HP-125 OR 250 VAC
1/2A-125 VDC; 1/4A-250 VDC

DO NOT SCALE PRINT

TOLERANCES

APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/04		
ONE PLACE	X,X	0.4/016	X X	0.6/03
TWO PLACES	X,XX	0.15/006	X XX	0.38/015
THREE PLACES ANGLES			X XXX	0.13/005

SI METRIC

US CUSTOMARY

DESIGN UNITS

US CUSTOMARY

WEIGHT .125 LB