

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - TOGGLE


CATALOG LISTING

4NT1-10 SERIES CHART 1


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS)										CONTINUOUS
			RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD			
			DC VOLTS			AC VOLTS		28 VDC	125 VAC	28 VDC	125 VAC		
4NTI-10	NONE	1	20	.75	.5	15	6	5	4	12	15		
4NTI-10/5	A,B,D,E,F,G,H,J,K,L,M,N,P	2											

.076±.008 WIDE KEYWAY

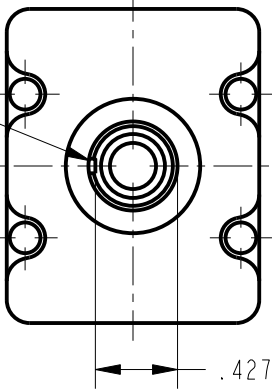


STYLE 1 LEVER

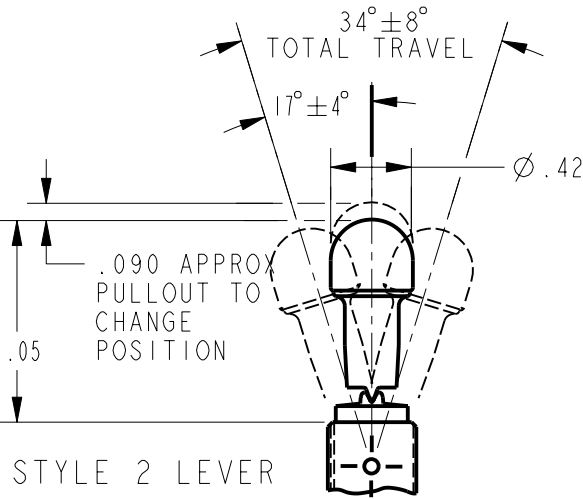


STYLE 2 LEVER

34°±8° TOTAL TRAVEL
17°±4°

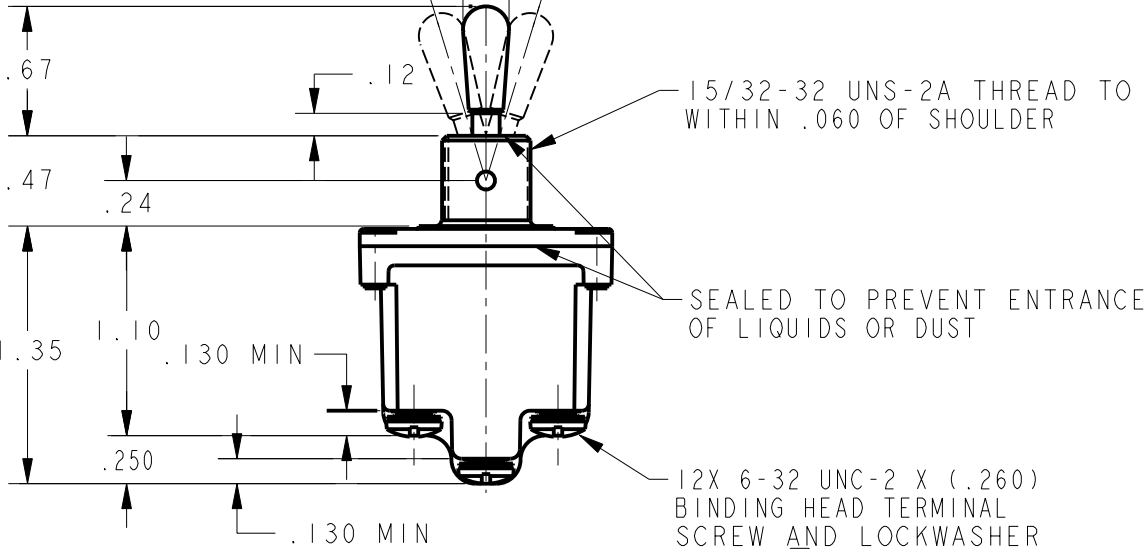

SEALED TO PREVENT ENTRANCE OF LIQUIDS OR DUST

12X 6-32 UNC-2 X (.260) BINDING HEAD TERMINAL SCREW AND LOCKWASHER (SEMS) 3

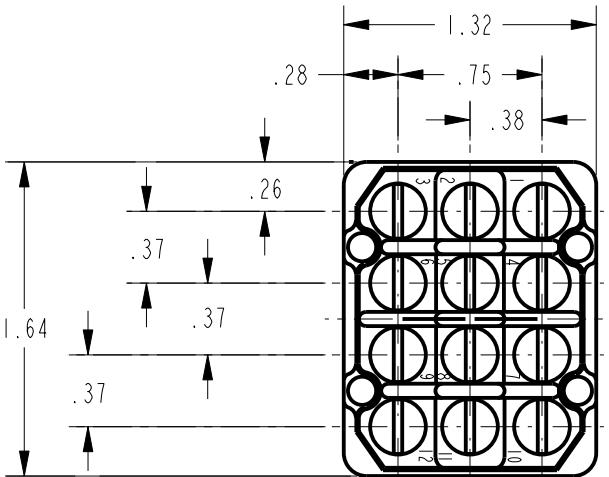


NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - KEYWAY SHOWN ON LEFT SIDE
- 5 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 6 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA9

"A" 4 LOCKED IN THREE POSITIONS	"B" 4 LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D" 4 LOCKED OUT OF CENTER POSITION	"E" 4 LOCKED IN CENTER POSITION	"F" 4 LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G" 4 LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H" 4 LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J" 4 LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K" 4 LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L" 4 LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M" 4 LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N" 4 LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)

CIRCUIT MADE WITH TOGGLE LEVER IN		
KEYWAY SIDE	CENTER	OPPOSITE KEYWAY
3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10	3 2 1 6 5 4 9 8 7 12 11 10
MAINTAINED POSITION	MAINTAINED POSITION	MAINTAINED POSITION

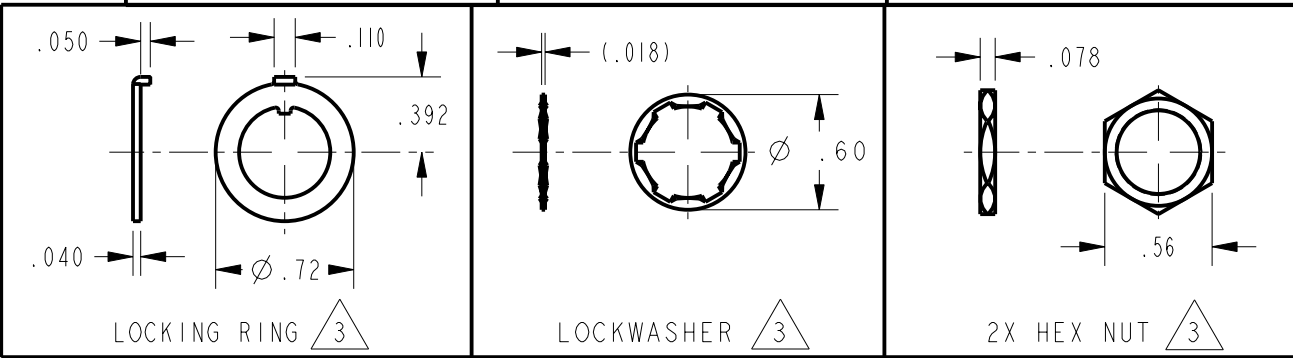


ELECTRICAL RATING

L191 15A 125, 250, 277 VAC
1/2HP 125 VAC
1HP 250, 277 VAC
5A 125 VAC "L"



THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT