

CATALOG LISTING
4NT1-50 SERIES CHART 1
PAGE 1 OF 1
RELEASE NO. PR-21800


REVISIONS
A CO-94362
LJK
19 NOV 99
CHECK
19 NOV 99
JAF
CHECK
19 NOV 99
LJK
DRAWN
PTC/CAD 2D

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929


SWITCH - TOGGLE

CATALOG LISTING
4NT1-50 SERIES CHART 1



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

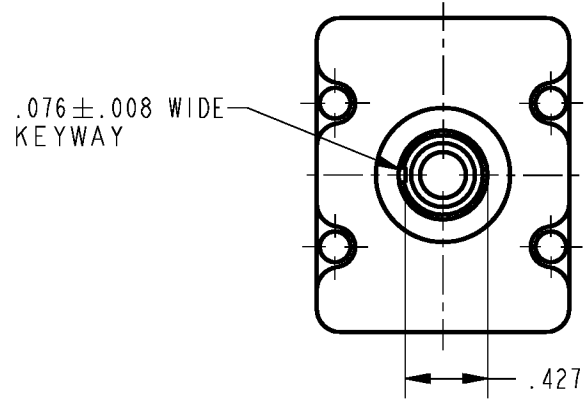

STYLE 1 LEVER

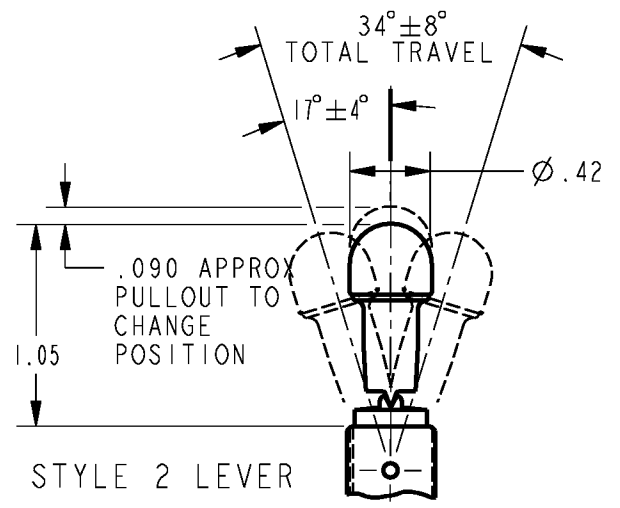

STYLE 2 LEVER

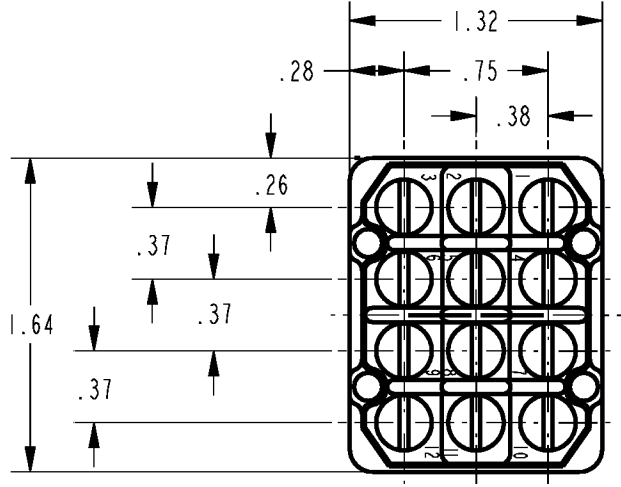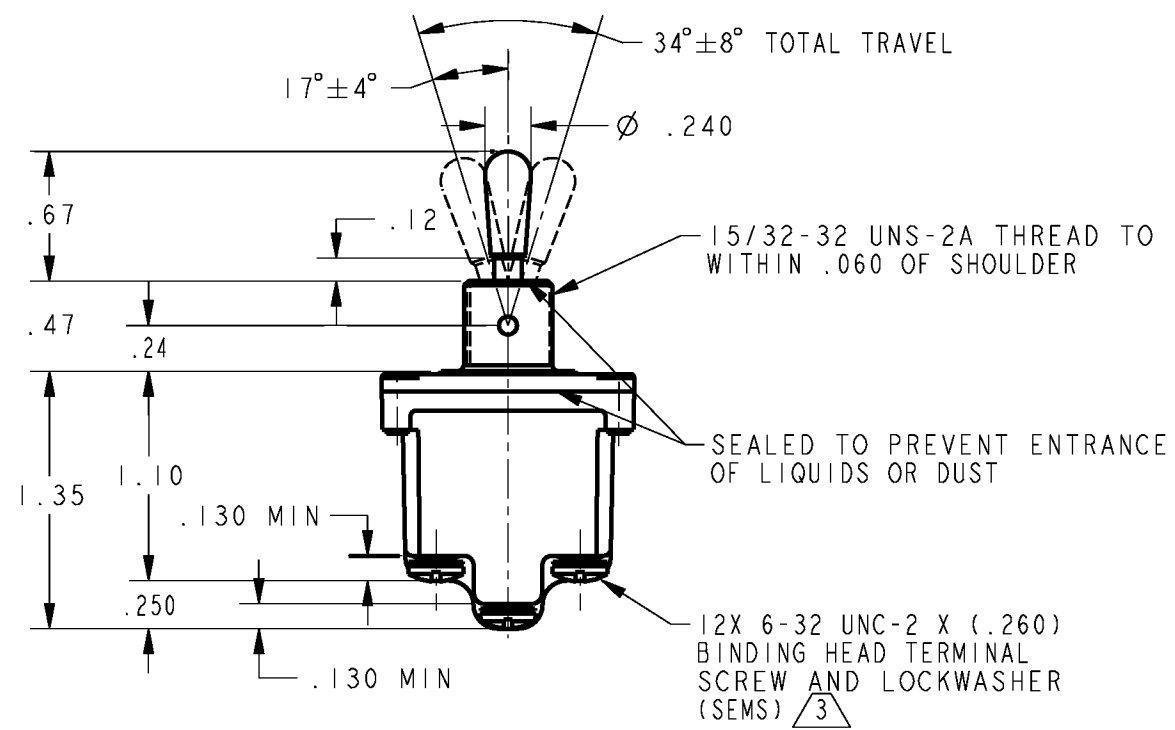


NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - KEYWAY SHOWN ON LEFT SIDE
- 5 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 6 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA9

CATALOG LISTING	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NUMBER	CURRENT CAPACITY (AMPS)										CON-TINU-OUIS
			RESISTIVE LOAD					LAMP LOAD	INDUCTIVE LOAD				
			DC VOLTS			AC VOLTS		28 VDC	125 VAC	28 VDC	125 VAC		
4NTI-50	NONE	1	18	.75	.5	11	6	4	2	10	8		
4NTI-50/5	E,F,K,L,M,N	2											

"A"  LOCKED IN THREE POSITIONS	"B"  LOCKED IN CENTER AND EXTREME POS. (KEYWAY SIDE)	"D"  LOCKED OUT OF CENTER POSITION	"E"  LOCKED IN CENTER POSITION	"F"  LOCKED IN EXTREME POS. (OPP. KEYWAY)	"G"  LOCKED IN EXTREME POS. (KEYWAY SIDE)
"H"  LOCKED OUT OF CENTER AND EXTREME POS. (KEYWAY SIDE)	"J"  LOCKED OUT OF CENTER AND EXTREME POS. (OPP. KEYWAY)	"K"  LOCKED IN CENTER AND EXTREME POS. (OPP. KEYWAY)	"L"  LOCKED OUT OF EXTREME POS. (KEYWAY SIDE)	"M"  LOCKED OUT OF AND INTO EXTREME POS. (OPP. KEYWAY)	"N"  LOCKED OUT OF EXTREME POS. (OPP. KEYWAY)

CIRCUIT MADE WITH TOGGLE LEVER IN	KEYWAY SIDE			CENTER			OPPOSITE KEYWAY		
	3	2	1	3	2	1	3	2	1
	6	5	4	6	5	4	6	5	4
	9	8	7	9	8	7	9	8	7
	12	11	10	12	11	10	12	11	10
	MOMENTARY POSITION			MAINTAINED POSITION			MAINTAINED POSITION		

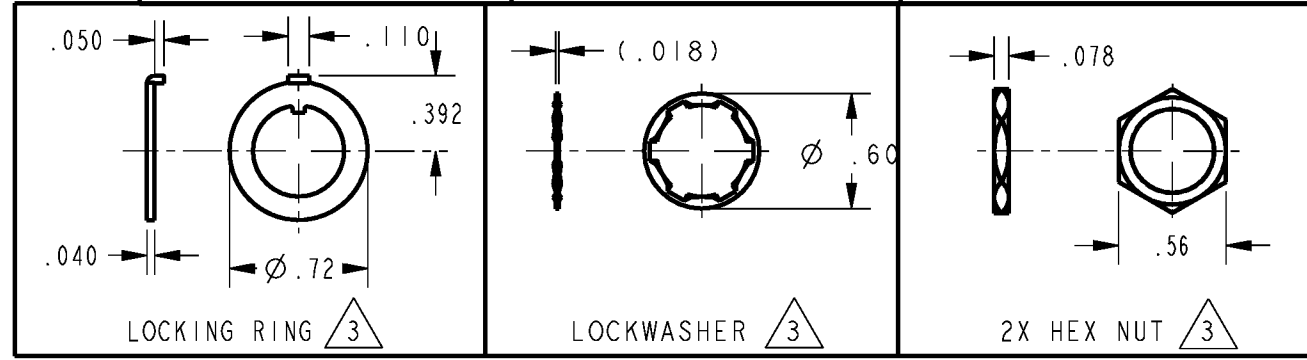

ELECTRICAL RATING	
L192	
10A 125, 250, 277 VAC	
1/4HP 125 VAC,	
1/2HP 250, 277 VAC	
3A 125 VAC "L"	

THIRD ANGLE PROJECTION	
SCALE	FULL
DO NOT SCALE PRINT	
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
ONE PLACE	(.0) ±.030
TWO PLACE	(.00) ±.015
THREE PLACE	(.000) ±.005
ANGLES	±
WEIGHT	