




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CIRCUIT MADE WITH TOGGLE LEVER IN

KEYWAY SIDE

CENTER

OPPOSITE KEYWAY





MOMENTARY POSITION

MAINTAINED POSITION

MOMENTARY POSITION

ELECTRICAL DATA





L192 10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

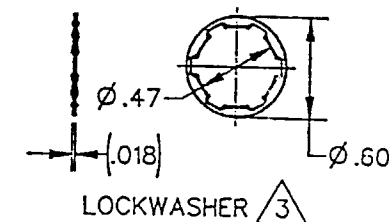

PROPOSAL PRINT
NOT RELEASED TO PRODUCTION

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - MICRO SWITCH CAT. LIST. MARKED ON SIDE OF SWITCH
- 3  FURNISHED UNASSEMBLED
- 4  APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS

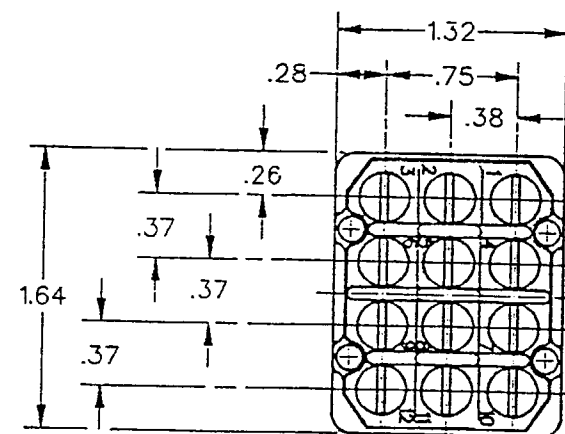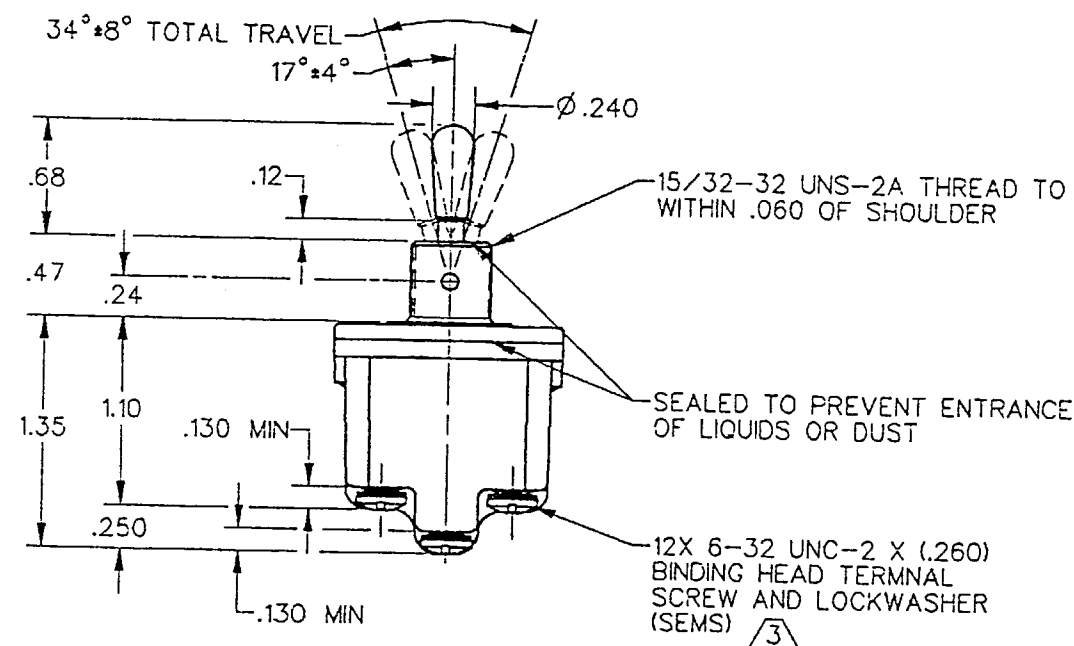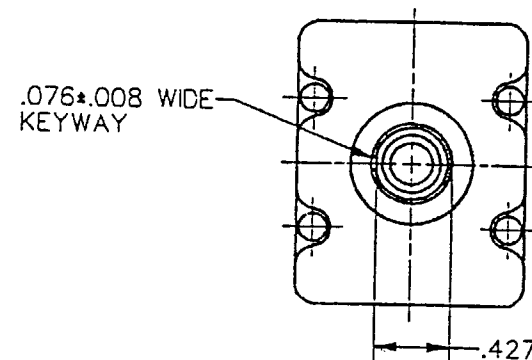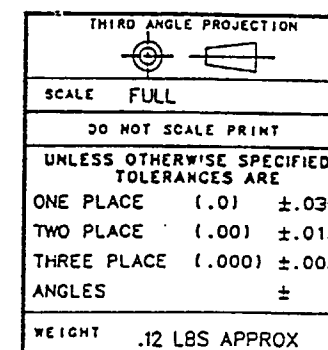

ANSI Y14.5M-1982 APPLIES