

CATALOG LISTING

4NT91-70

REPLACES

RELEASE NO. PR-19577

PAGE 1 OF 1

CHECK

REVISIONS

A CO-94362

LJK

22 NOV 99

CHECK

22 NOV 99

JAF

CHECK

22 NOV 99

LJK

PTC/CAD 2D

DRAWN

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929


SWITCH - TOGGLE

CATALOG LISTING

4NT91-70


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

LEVER ON KEYWAY SIDE

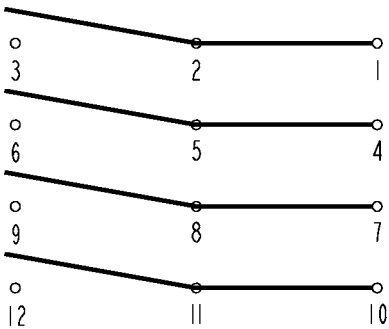


MOMENTARY POSITION

LEVER IN CENTER

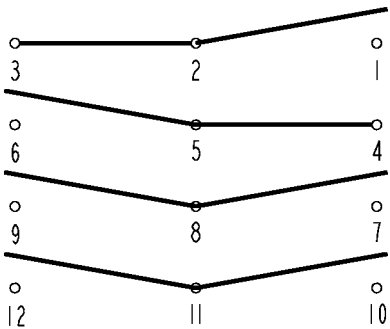

MAINTAINED POSITION




LEVER OPPOSITE KEYWAY

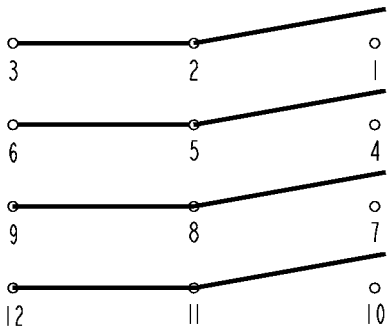


MOMENTARY POSITION

ELECTRICAL DATA

L192
10A 125, 250, 277 VAC
1/4HP 125 VAC,
1/2HP 250, 277 VAC
3A 125 VAC "L"

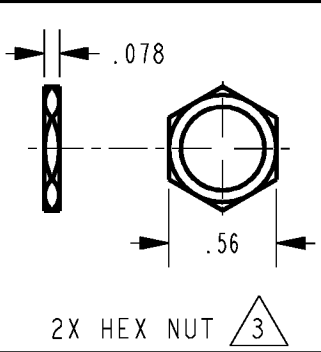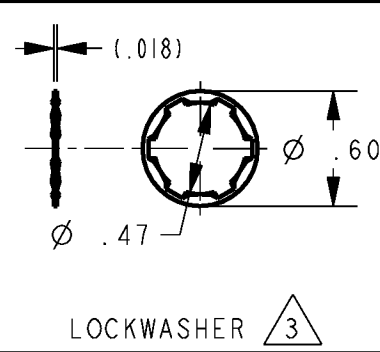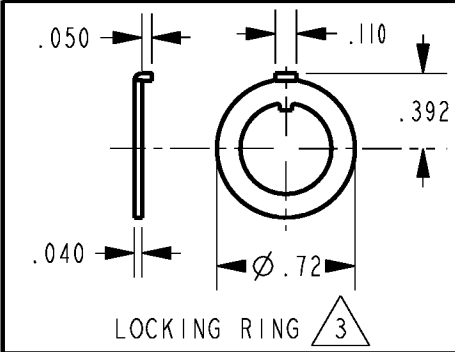

.076±.008 WIDE
KEYWAY



.427



34°±8° TOTAL TRAVEL
17°±4°

Ø .240

15/32-32 UNS-2A THREAD TO
WITHIN .060 OF SHOULDER

SEALED TO PREVENT ENTRANCE
OF LIQUIDS OR DUST


12X .250 WIDE QUICK
CONNECT TERMINAL

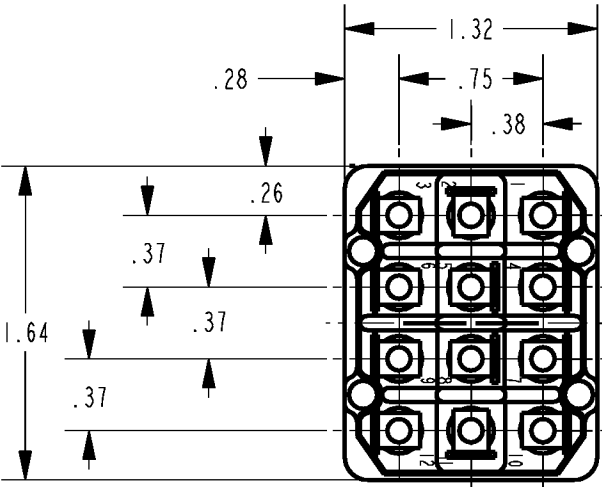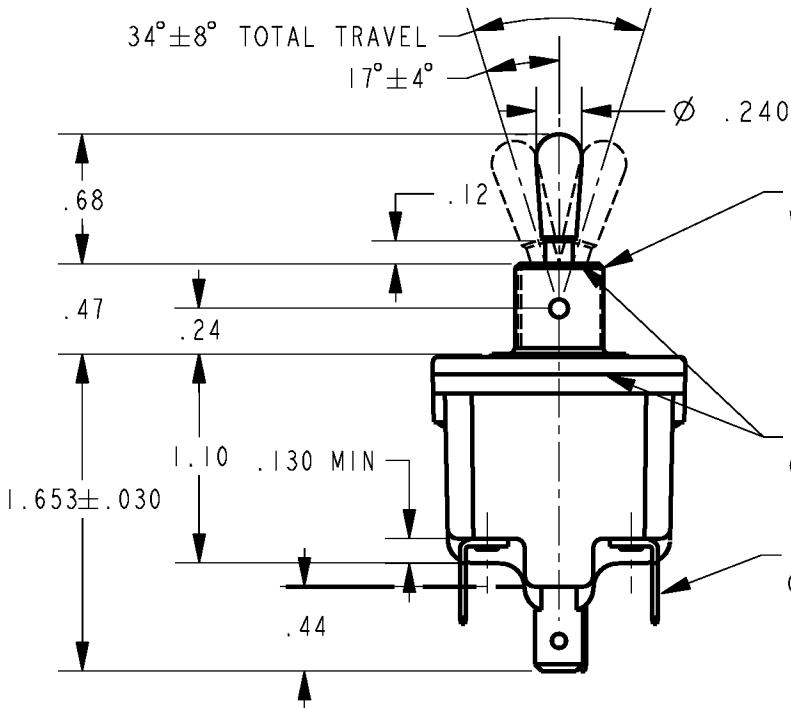

NOTES

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
2 - MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
3 - FURNISHED UNASSEMBLED

THIRD ANGLE PROJECTION



SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES ±

WEIGHT

ANSI Y14.5M-1982 APPLIES