
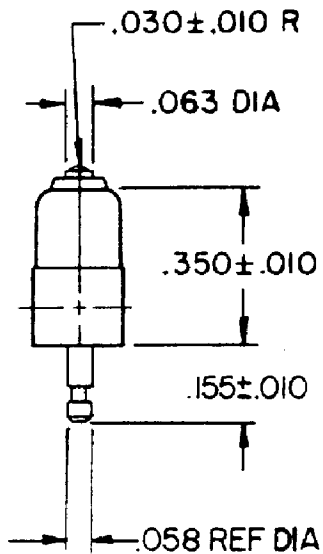
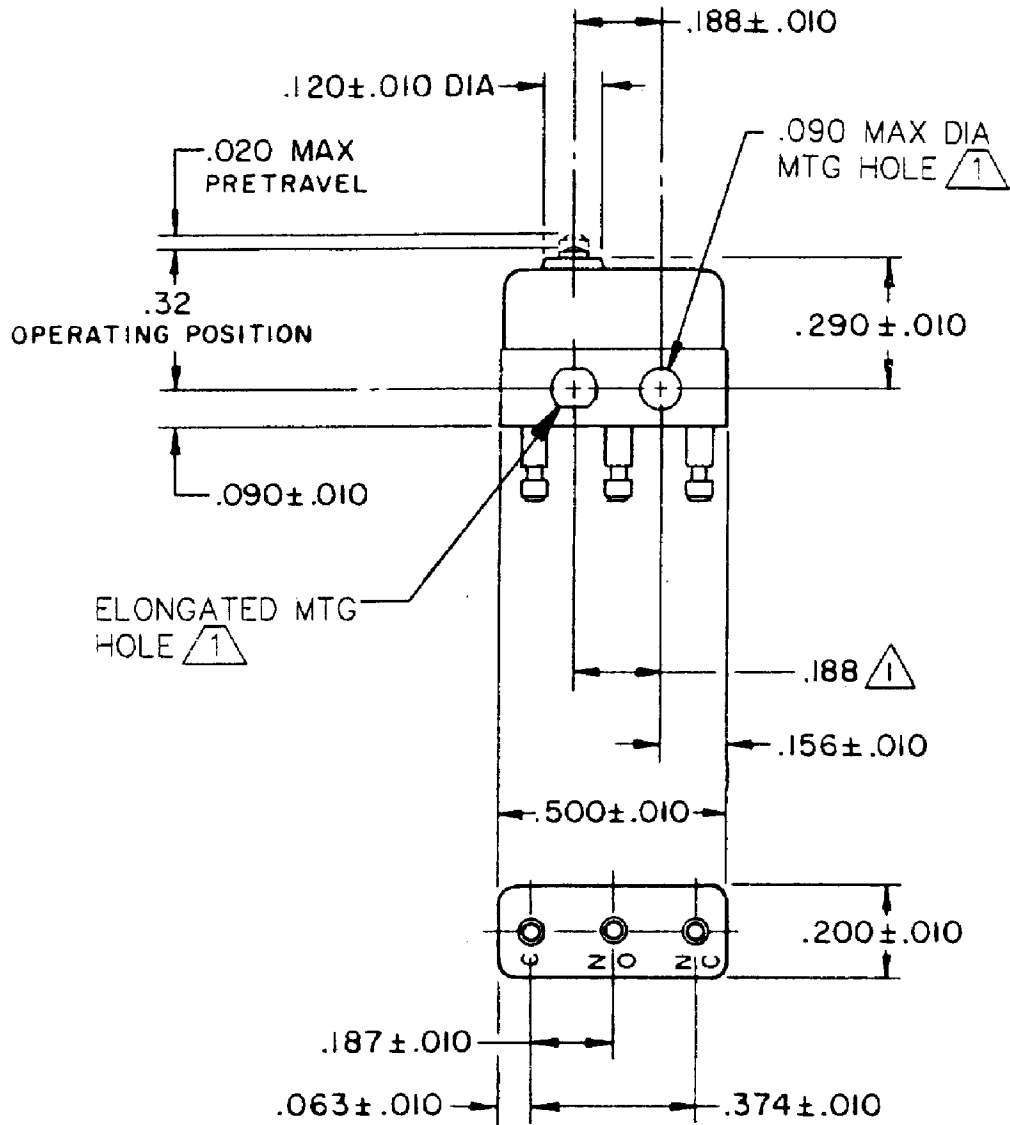


HONEYWELL PART NUMBER
4SX1-H58
PRODUCT CODE VDF0100

REV	DOCUMENT	CHANGED BY	CHECK
10	0038447	SS 28MAR08	BLR

PLASTIC PLUNGER



NOTE -
1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188 ± .002 CENTERS
2 PLATED TERMINALS WILL ACCEPT "AMP INC".058 DIA PIN RECEPTACLES.
3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F
4 - SEE SPECIFICATION OF MATING TERMINAL RECEPTACLE FOR TEMPERATURE LIMITATIONS

RELEASE NO.
PR-3391
REPLACES

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ± THIRD ANGLE PROJECTION 		DRAWN	SPK	06FEB08	Honeywell			
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	06FEB08				
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			0.030 0.015 0.005	THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.			TITLE SWITCH - BASIC				
DIFFERENTIAL TRAVEL— — — .005 MAX			SEA LEVEL	50,000 FT									
OVERTRAVEL — — — — — .004 MIN		MAXIMUM INRUSH 24 AMP			INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE	TYPE	DRAWING NAME		REV	
		APPROVALS	KEMA, CE	7A 250V~ T125 5E4 				B	I	4SX1-H58		10	
			UL, CSA	7A 250 VAC   BRAND L7				SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1		
								RASTER					