


REV	DOCUMENT	CHANGED BY	CHECK
5	0038447	SS 28MAR08	BLR

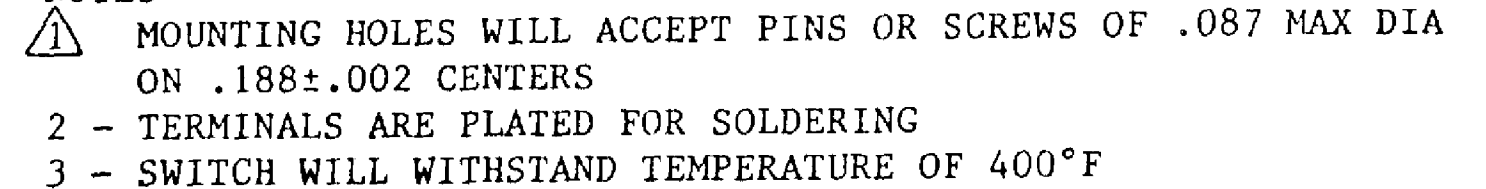

RELEASE NO.	PR-13173
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± 0.030 TWO PLACE .XX ± 0.015 THREE PLACE .XXX ± 0.005 FOUR PLACE .XXXX ± ANGLES ±		DRAWN	SPK	06FEB08	Honeywell				
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT					CHECK	RJ	06FEB08					TITLE SWITCH - BASIC
RELEASE FORCE— — — — 1 OZ MIN		28 VOLTS DC RATING			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			SIZE B TYPE I DRAWING NAME 4SX1-T2 REV 5				
DIFFERENTIAL TRAVEL— — — .005 MAX		INDUCTIVE												SEA LEVEL
OVERTRAVEL — — — — — .004 MIN		RESISTIVE			4 AMP			2.5 AMP			SCALE - WEIGHT:.003 LB MAX SHEET 1 OF 1			
		MAXIMUM INRUSH 24 AMP			7 AMP			7 AMP						
		APPROVALS			KEMA, CE			7A 250V ~ T125 5E4			THIRD ANGLE PROJECTION 			
					UL, CSA			7A 250 VAC						