


HONEYWELL PART NUMBER
4SX19-T
PRODUCT CODE VDF0876

REV	DOCUMENT	CHANGED BY	CHECK
6	0038447	SS 28MAR08	BLR

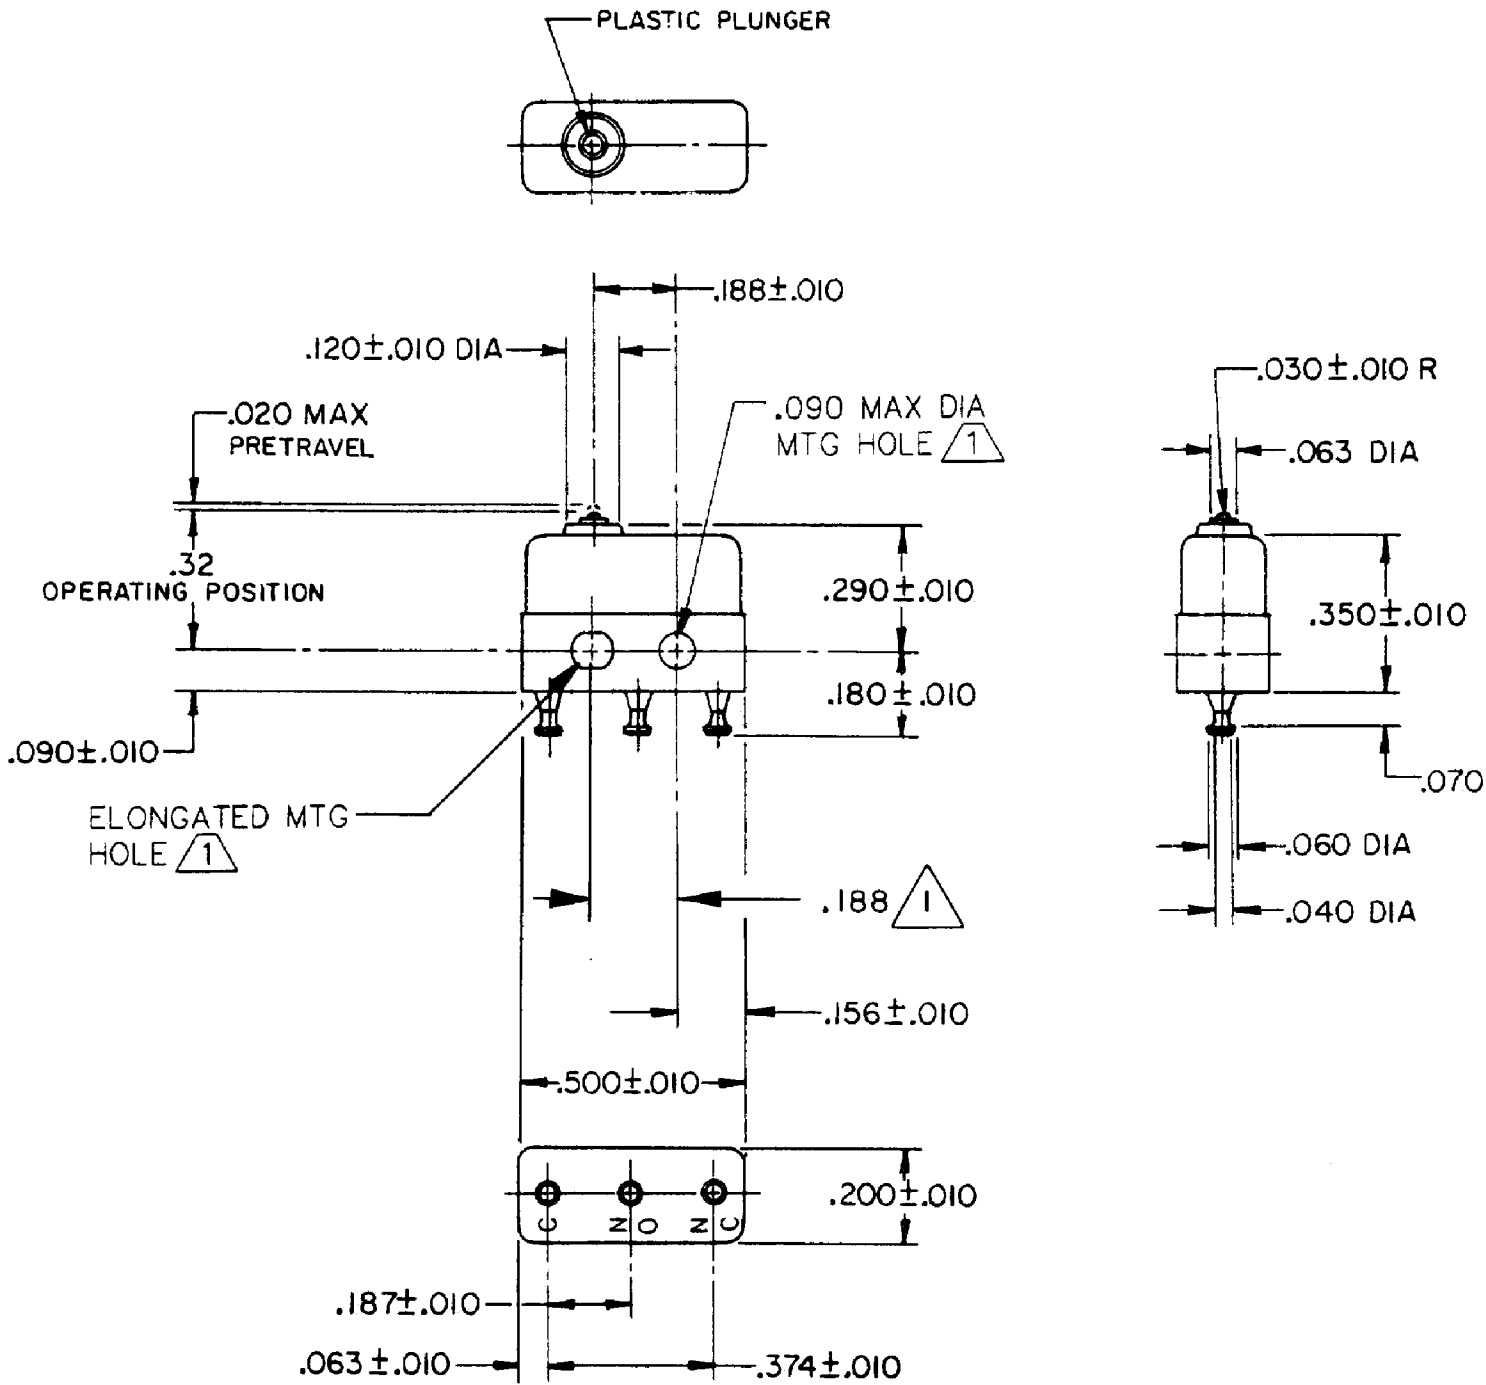

- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .087 MAX DIA ON .188±.002 CENTERS
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 SWITCH WILL WITHSTAND TEMPERATURE OF 400°F

RELEASE NO.	PR-6196
REPLACES	

CHARACTERISTICS		ELECTRICAL DATA			DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±			DRAWN		SPK		06FEB08		Honeywell			
OPERATING FORCE — — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT						CHECK		RJ		06FEB08					
RELEASE FORCE— — — — — 1 OZ MIN		28 VOLTS DC RATING			0.030 0.015 0.005			THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.				TITLE SWITCH - BASIC					
DIFFERENTIAL TRAVEL— — — .002 MAX			SEA LEVEL	50,000 FT													
OVERTRAVEL — — — — — .004 MIN		INDUCTIVE		4 AMP	2.5 AMP												
		RESISTIVE		7 AMP	7 AMP												
		MAXIMUM INRUSH 24 AMP					INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY				SIZE B	TYPE I	DRAWING NAME 4SX19-T		REV 6		
		APPROVALS	KEMA, CE	7A 250V~ T125 5E4		UL, CSA											7A 250 VAC
										RASTER				SCALE	-	WEIGHT:.003 LB MAX	SHEET 1 OF 1