
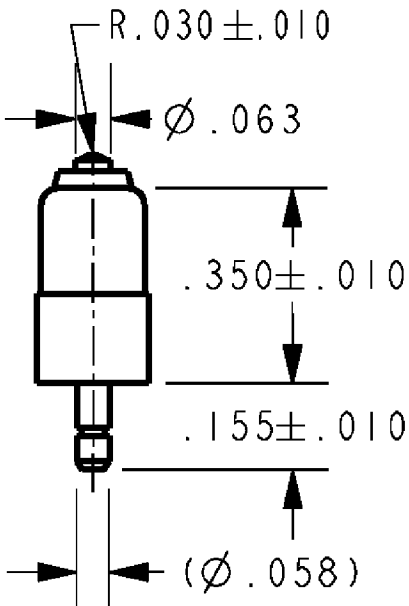
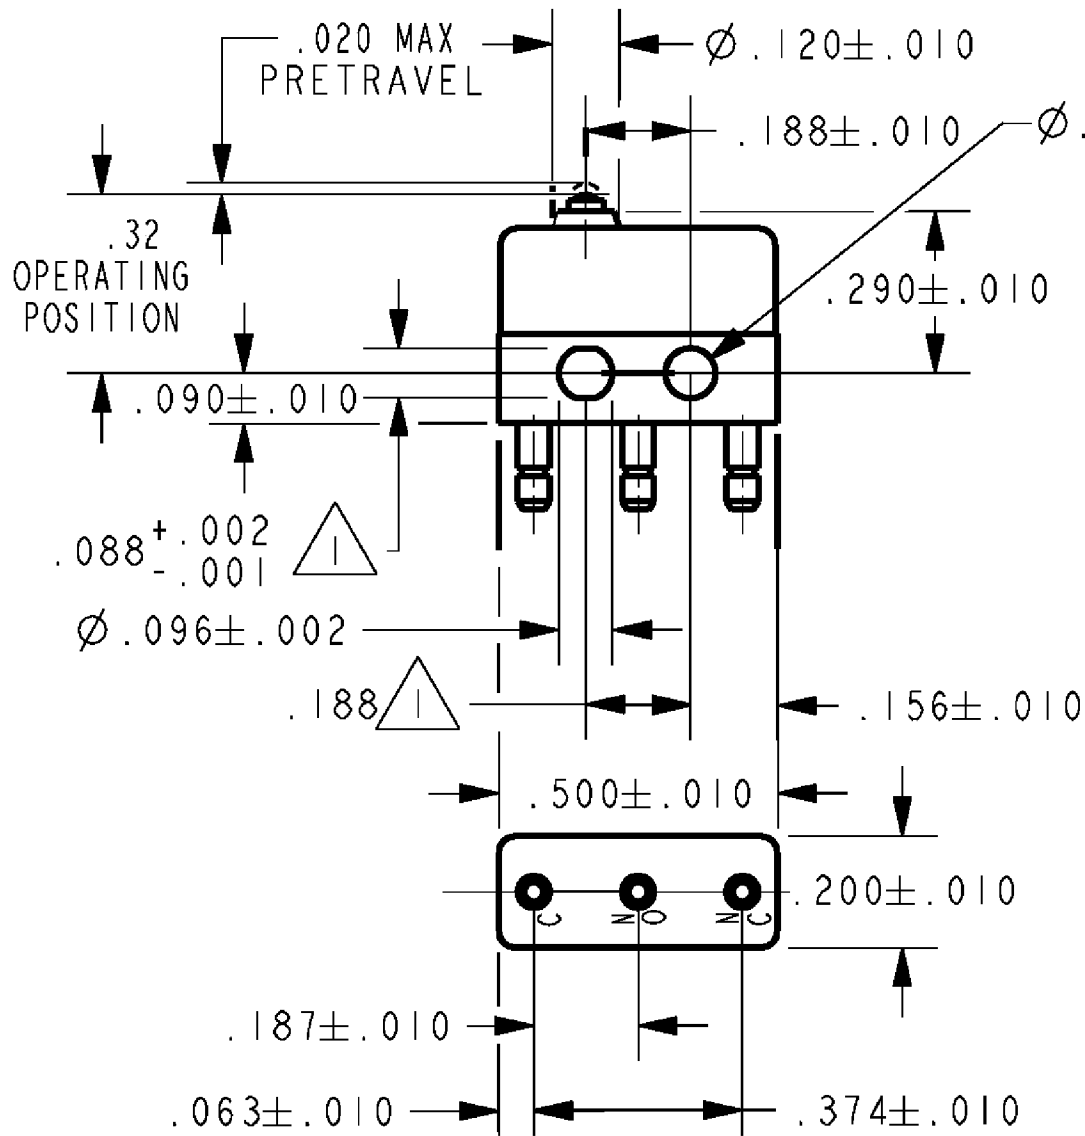


HONEYWELL PART NUMBER
4SX37-H58
PRODUCT CODE VDF0965


REV	DOCUMENT	CHANGED BY	CHECK
5	0038447	SS 28MAR08	BLR

PLASTIC PLUNGER



- NOTES
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF Ø.087 MAX ON .188±.002 CENTERS
 - 2 - PLATED TERMINALS WILL ACCEPT "AMP INC" Ø.058 PIN RECEPTACLES
 - 3 - SWITCH WILL WITHSTAND TEMPERATURE OF 400° F
 - 4 - SEE SPECIFICATION OF MATING TERMINAL RECEPTACLE FOR TEMPERATURE LIMITATIONS
 - 5 - SWITCH HAS A GREATER OVERTRAVEL THAN STANDARD CONSTRUCTION
ADDITIONAL OVERTRAVEL WILL TEND TO REDUCE MECHANICAL LIFE

RELEASE NO.	PR-19988
REPLACES	X94396-SX

CHARACTERISTICS		ELECTRICAL DATA		DESIGN UNITS: INCH TOLERANCES UNLESS NOTED: NO PLACE X ± ONE PLACE .X ± TWO PLACE .XX ± THREE PLACE .XXX ± FOUR PLACE .XXXX ± ANGLES ±		DRAWN		SPK		06FEB08		Honeywell			
OPERATING FORCE — — — 5 OZ MAX		CONTACT ARRANGEMENT SPDT				CHECK		RJ		06FEB08					
RELEASE FORCE— — — — 1 OZ MIN				0.030 0.015 0.005		THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		TITLE							
DIFFERENTIAL TRAVEL— — — .005 MAX								SWITCH - BASIC							
OVERTRAVEL — — — — .010 MIN								INTERPRET PER ANSI Y14.5M-1982 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		SIZE	TYPE	DRAWING NAME		REV	
										B	I	4SX37-H58		5	
		APPROVALS		THIRD ANGLE PROJECTION 		RASTER		SCALE		-		WEIGHT:.003 LB MAX		SHEET 1 OF 1	
		KEMA, CE		7A 250V~ T125 5E4 											
		UL, CSA		7A 250 VAC   BRAND L7											