

FED. MFG. CODE 91929

CATALOG LISTING



4TL1-50 SERIES

CHART 1


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

WEIGHT

10A-125, 250, 277 VAC
1/4HP-125VAC; 1/2HP-250, 277VAC
3A-125VAC "L" CODE L192

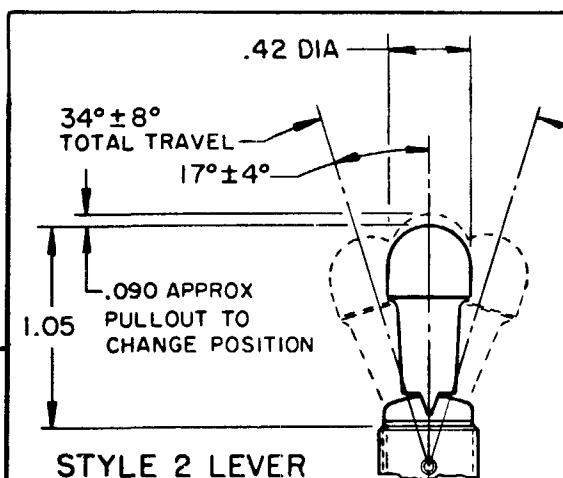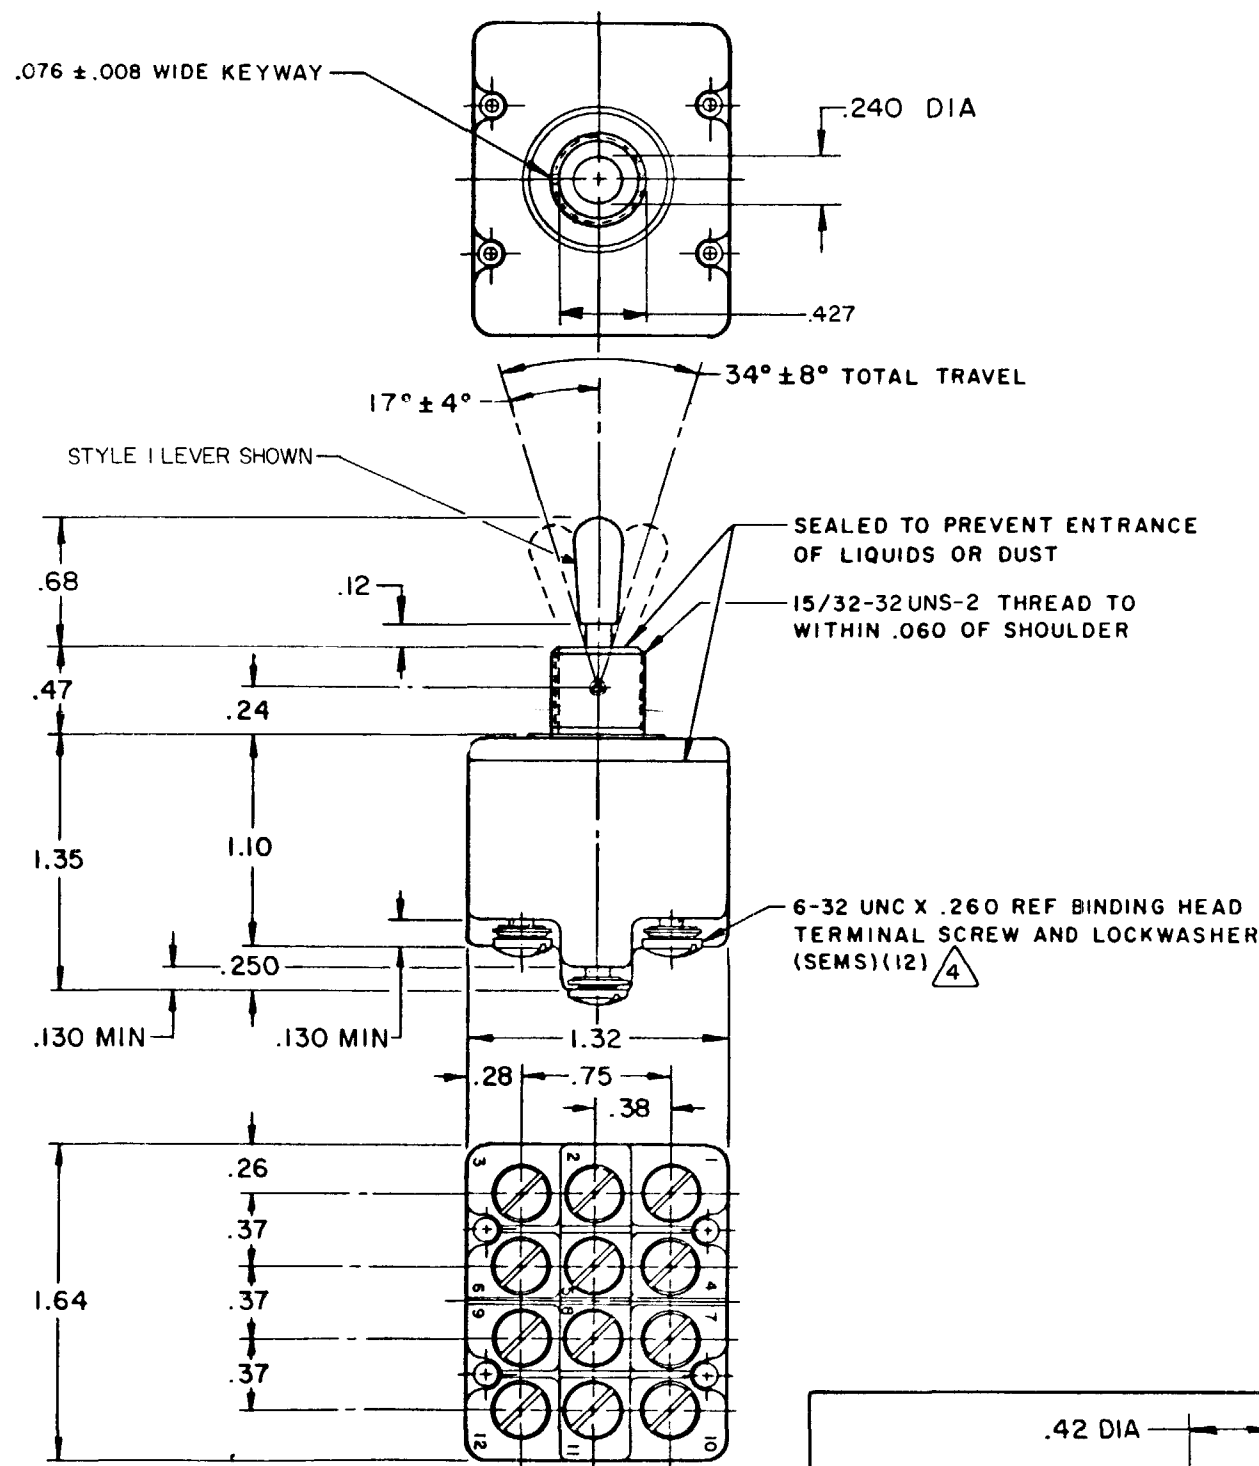

CAT. LIST.	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	STYLE NO.	MILITARY RATING (AMPS)										MS NUMBER
			RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD		CONTIN- UOUS	
			DC VOLTS		AC VOLTS								
			28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC		
4TLI-50	NONE	1	18	.75	.5	11	6	4	2	10	8		27406-2
4TLI-50 	E, F, K, L, M, N	2											27409-2 

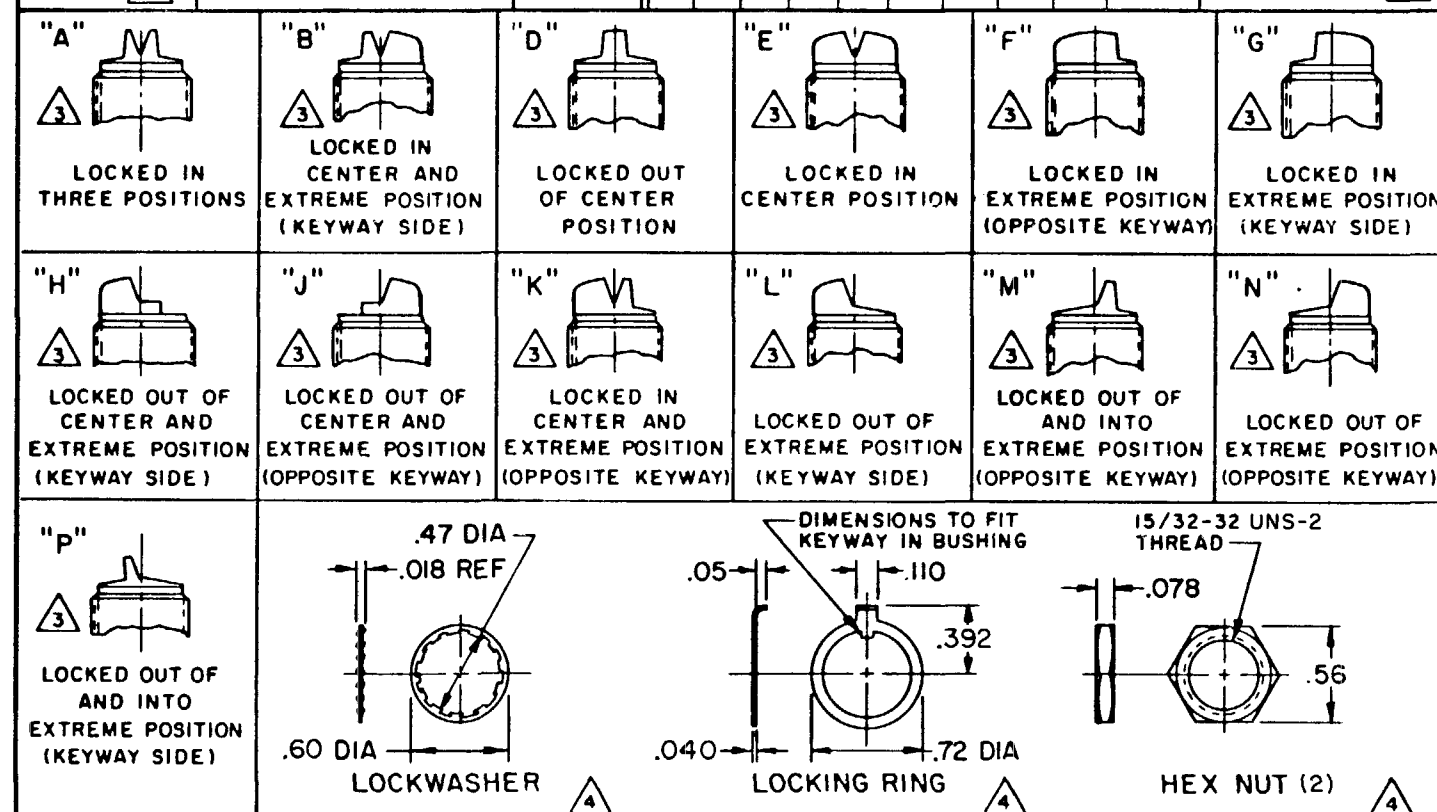

LEVER ON KEYWAY SIDE	LEVER IN CENTER	LEVER OPPOSITE KEYWAY
MOMENTARY POSITION	MAINTAINED POSITION	MAINTAINED POSITION

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND MS NUMBER MARKED ON SIDE OF SWITCH
- 3 - KEYWAY SHOWN ON LEFT SIDE
- 4 - FURNISHED UNASSEMBLED
- 5 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
- 6 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE
TOGGLE LOCKING, SEE CHART FOR AVAILABLE
LOCKING COMBINATIONS