


SWITCH - TOGGLE

CATALOG LISTING
4TL11-11A


DRAWING NUMBER
4TL11-11A
PAGE 1 OF 1
RELEASE NO. PR-4005
ISSUE
M
10

REVISIONS
A CO-81150
J A K
19 JUN 95
B REINST
200080
J J A
28 FEB 00
FORMTEK
DRAWN
M B S
26 NOV 69
CHECK
LSD
1 DEC 69
CHECK
GCH
1 DEC 69
CHECK
GCH

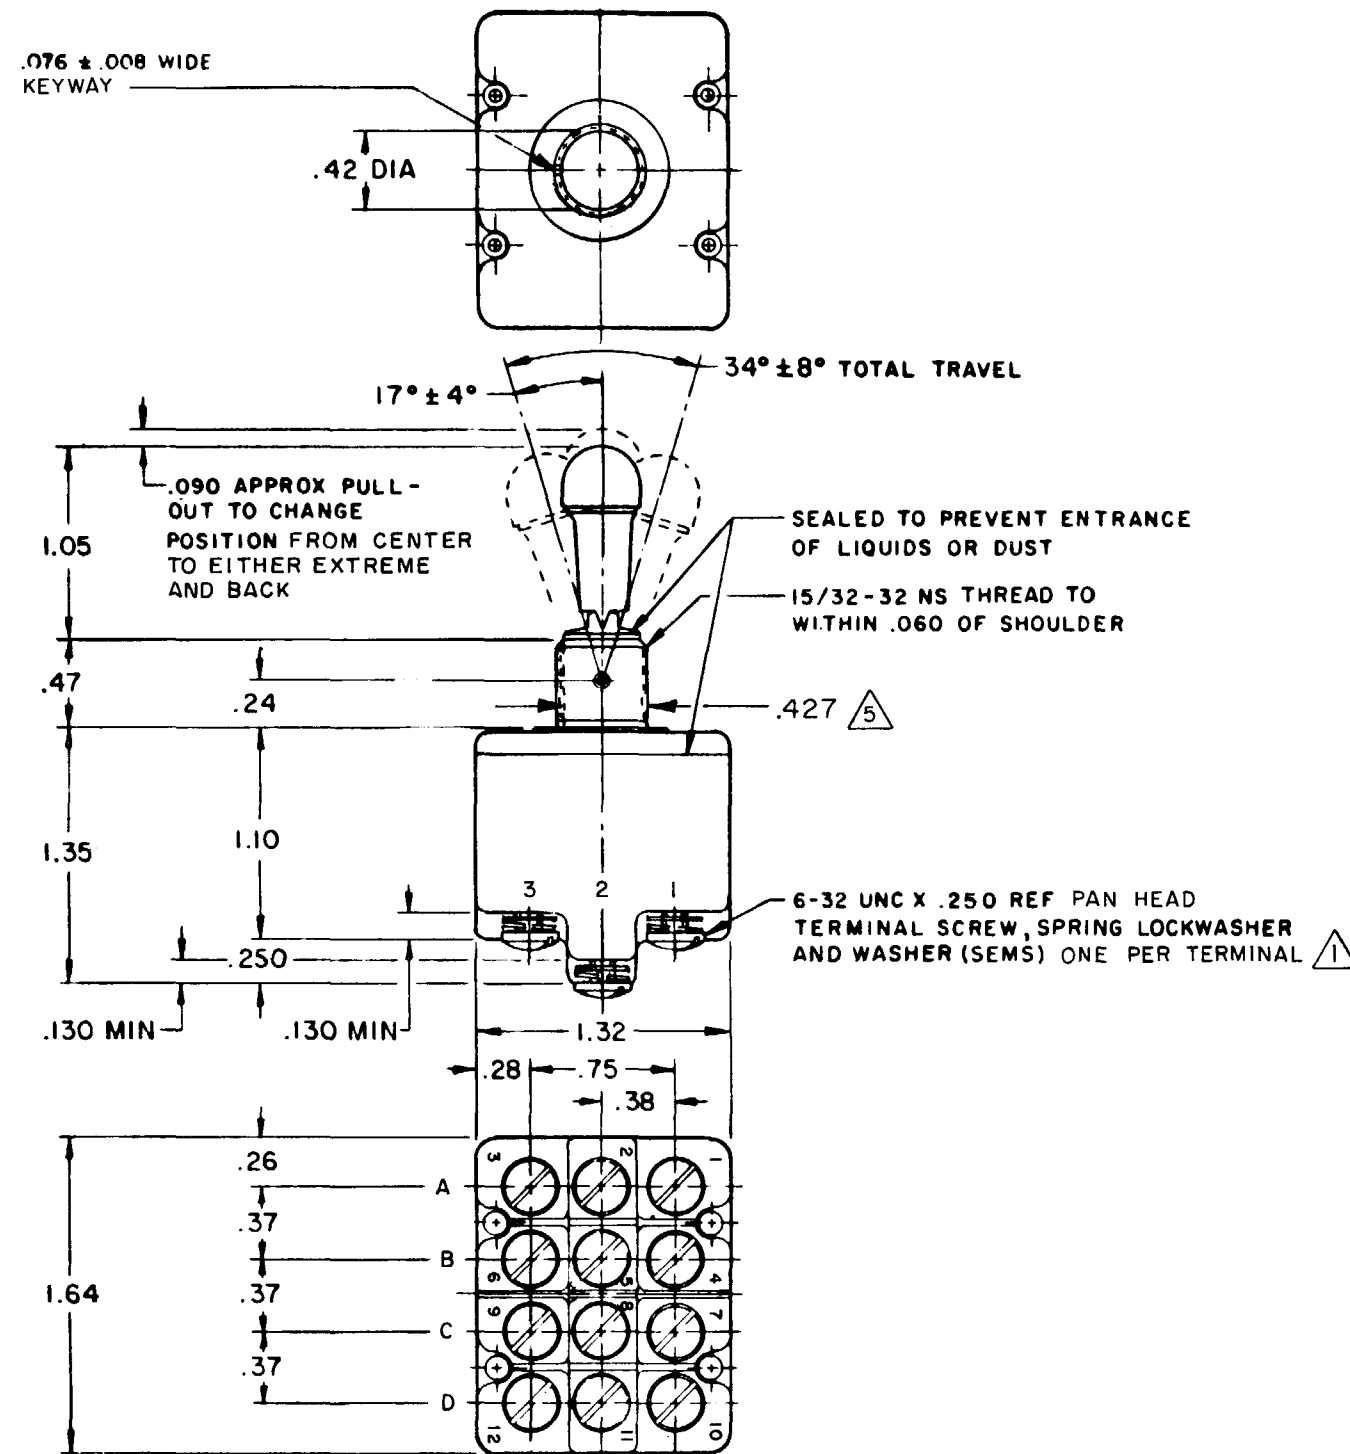


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

ELECTRICAL DATA								SCALE FULL	
CURRENT CAPACITY (AMPS)								DO NOT SCALE PRINT	
CONTIN- UOUS	RESISTIVE LOAD				LAMP LOAD		INDUCTIVE LOAD		UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES TOLERANCES ARE: ONE PLACE (.0) ± .030 TWO PLACE (.00) ± .018 THREE PLACE (.000) ± .008 ANGLES
	DC VOLTS		AC VOLTS		30 VDC	115 VAC	30 VDC	115 VAC	
	30	115	250	115	230				
	20	.75	.5	15	6	5	4	12	15
WEIGHT 95 GRAM MAX									

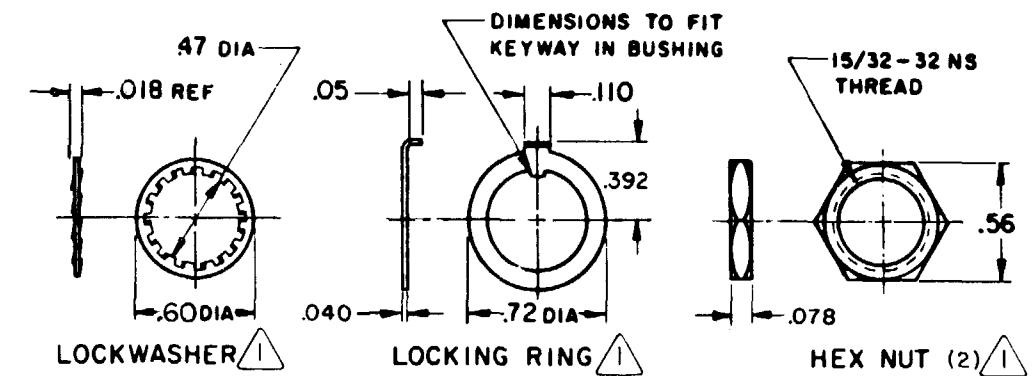

CIRCUIT DIAGRAM

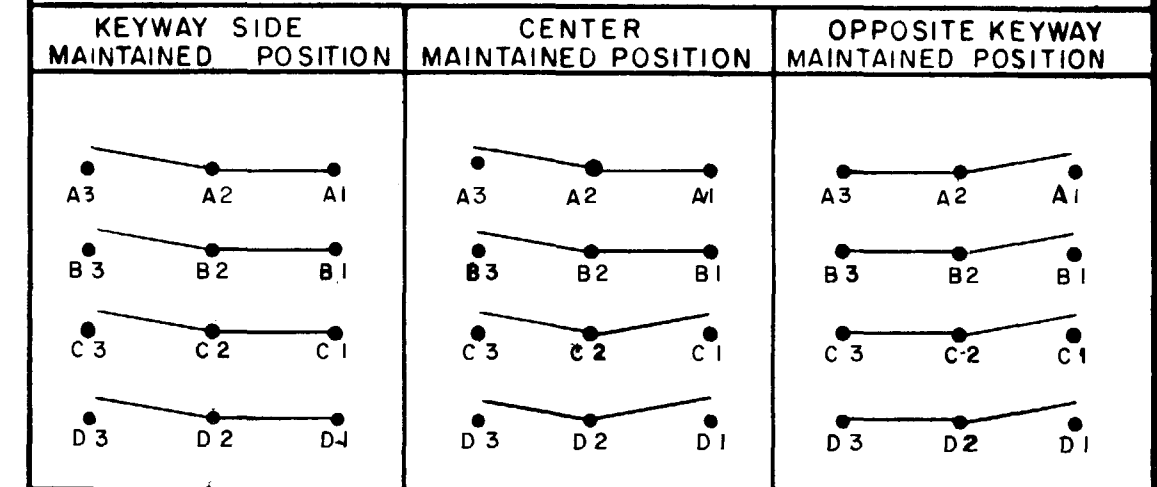

NOTE -

- △ FURNISHED UNASSEMBLED
- 2-MICRO SWITCH CATALOG LISTING, TERMINAL, POLE AND CIRCUIT DESIGNATION MARKED ON SIDE OF SWITCH
- 3-FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA9
- 4-SWITCH IS CAPABLE OF WITHSTANDING A. TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- △ FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD