

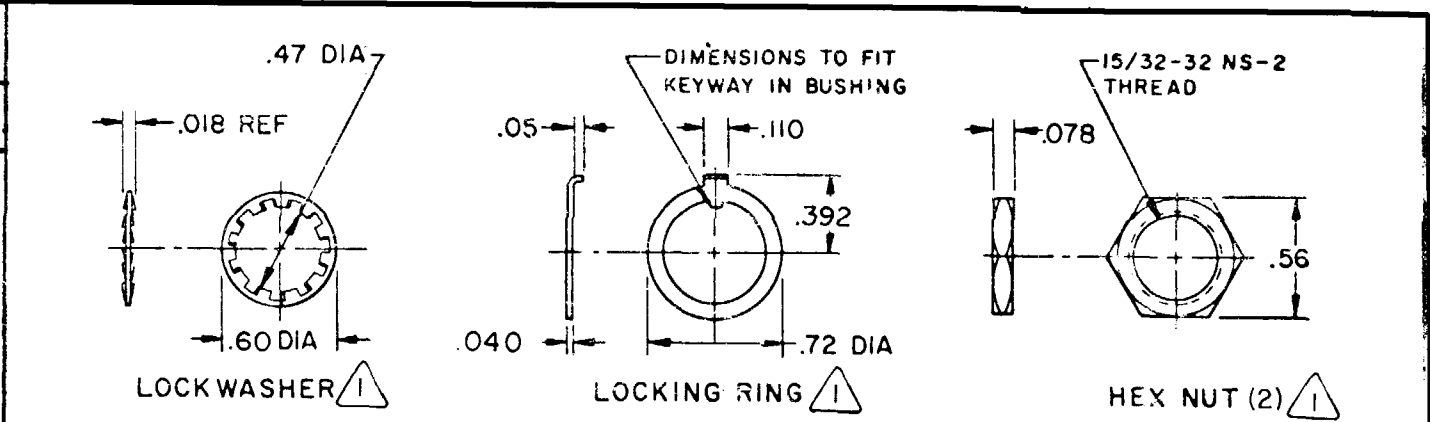


SWITCH-TOGGLE

CATALOG LISTING
4TL11-58P

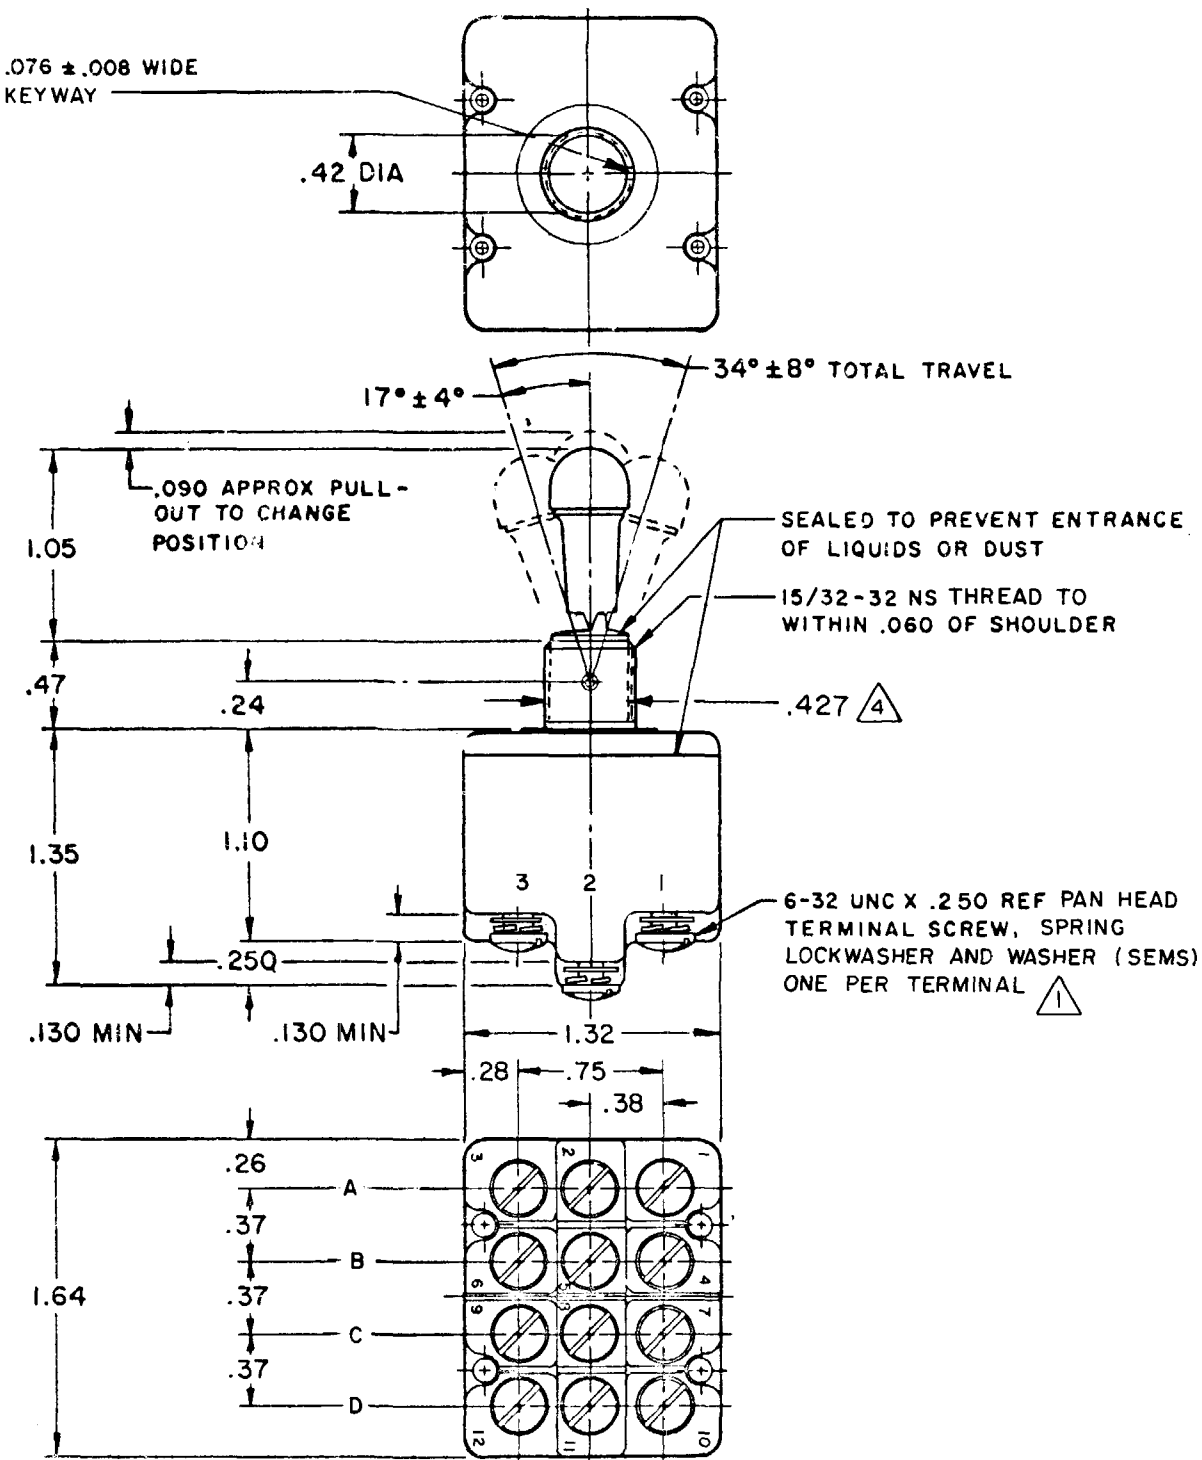

CIRCUIT DIAGRAM

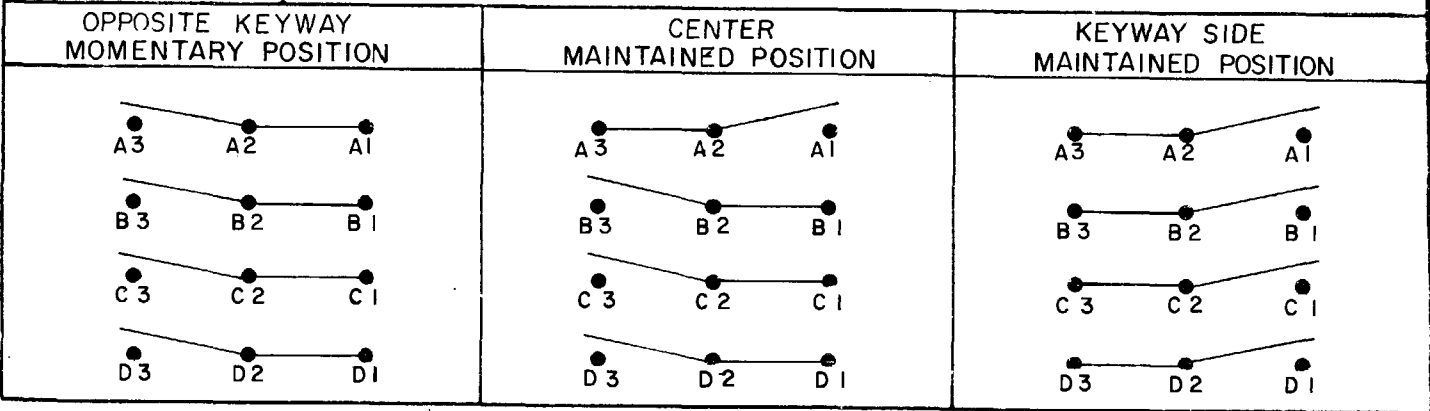

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

ELECTRICAL DATA									
CURRENT CAPACITY (AMPS)									
CONTINUOUS	RESISTIVE LOAD					LAMP LOAD			
	DC VOLTS		AC VOLTS			30 VDC		125 VAC	
	30	125	250	115	230	30 VDC	125 VAC	30 VDC	125 VAC
	18	.75	.5	11	6	4	2	10	8

SCALE
DO NOT SCALE PRINT
UNLESS OTHERWISE NOTED
DIMENSIONS ARE IN INCHES
TOLERANCES ARE:
ONE PLACE (.0) ±.030
TWO PLACE (.00) ±.015
THREE PLACE (.000) ±.005
ANGLES .1
WEIGHT .18 LB

NOTE-
1- FURNISHED UNASSEMBLED
2- MICRO SWITCH CATALOG LISTING, TERMINAL, POLE AND CIRCUIT DESIGNATION MARKED ON SIDE OF SWITCH
3- SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD
4- FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD

4TL11-58P
DRAWING NUMBER
M
REPLACES
PR-2951
CHECK
REVISIONS
A CO-81150
J A K
19 JUN 95
D L F 15 SEP 69
FORMTEK