

FED. MFG. CODE 91929

CATALOG LISTING
4TL111-72

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH



T S M	3 SEPT 91
-------	-----------

DDM/CAD

DRAWN


T S M	3 SEPT 91
-------	-----------



NOTES

- NOTES
- 1 - FURNISHED UNASSEMBLED
 - 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
 - 3 - FOR TERMINAL COVER SEE MICRO SWITCH CAT. LIST. 5PA9
 - 4 - SWITCH IS CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD

CURRENT CAPACITY (AMPS)								
RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			AC VOLTS		28 VDC	125 VAC	28 VDC	125 VAC
18	.75	.5	11	6	4	2	10	8

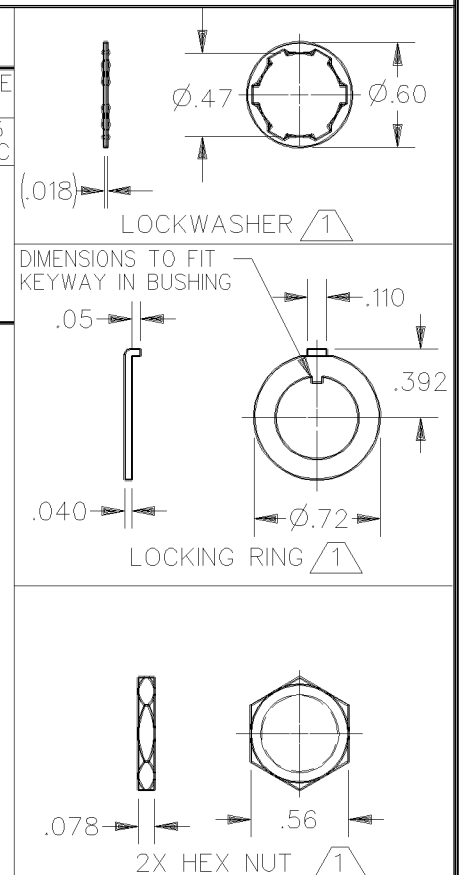

CIRCUIT DIAGRAM

KEYWAY SIDE MOMENTARY POSITION	CENTER MAINTAINED POSITION	OPPOSITE KEYWAY MOMENTARY POSITION
