


FREEPORT ILLINOIS U S A
A DIVISION OF HONEYWELL
FED. MFG CODE 81929

CATALOG LISTING
4TL141 SERIES


CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

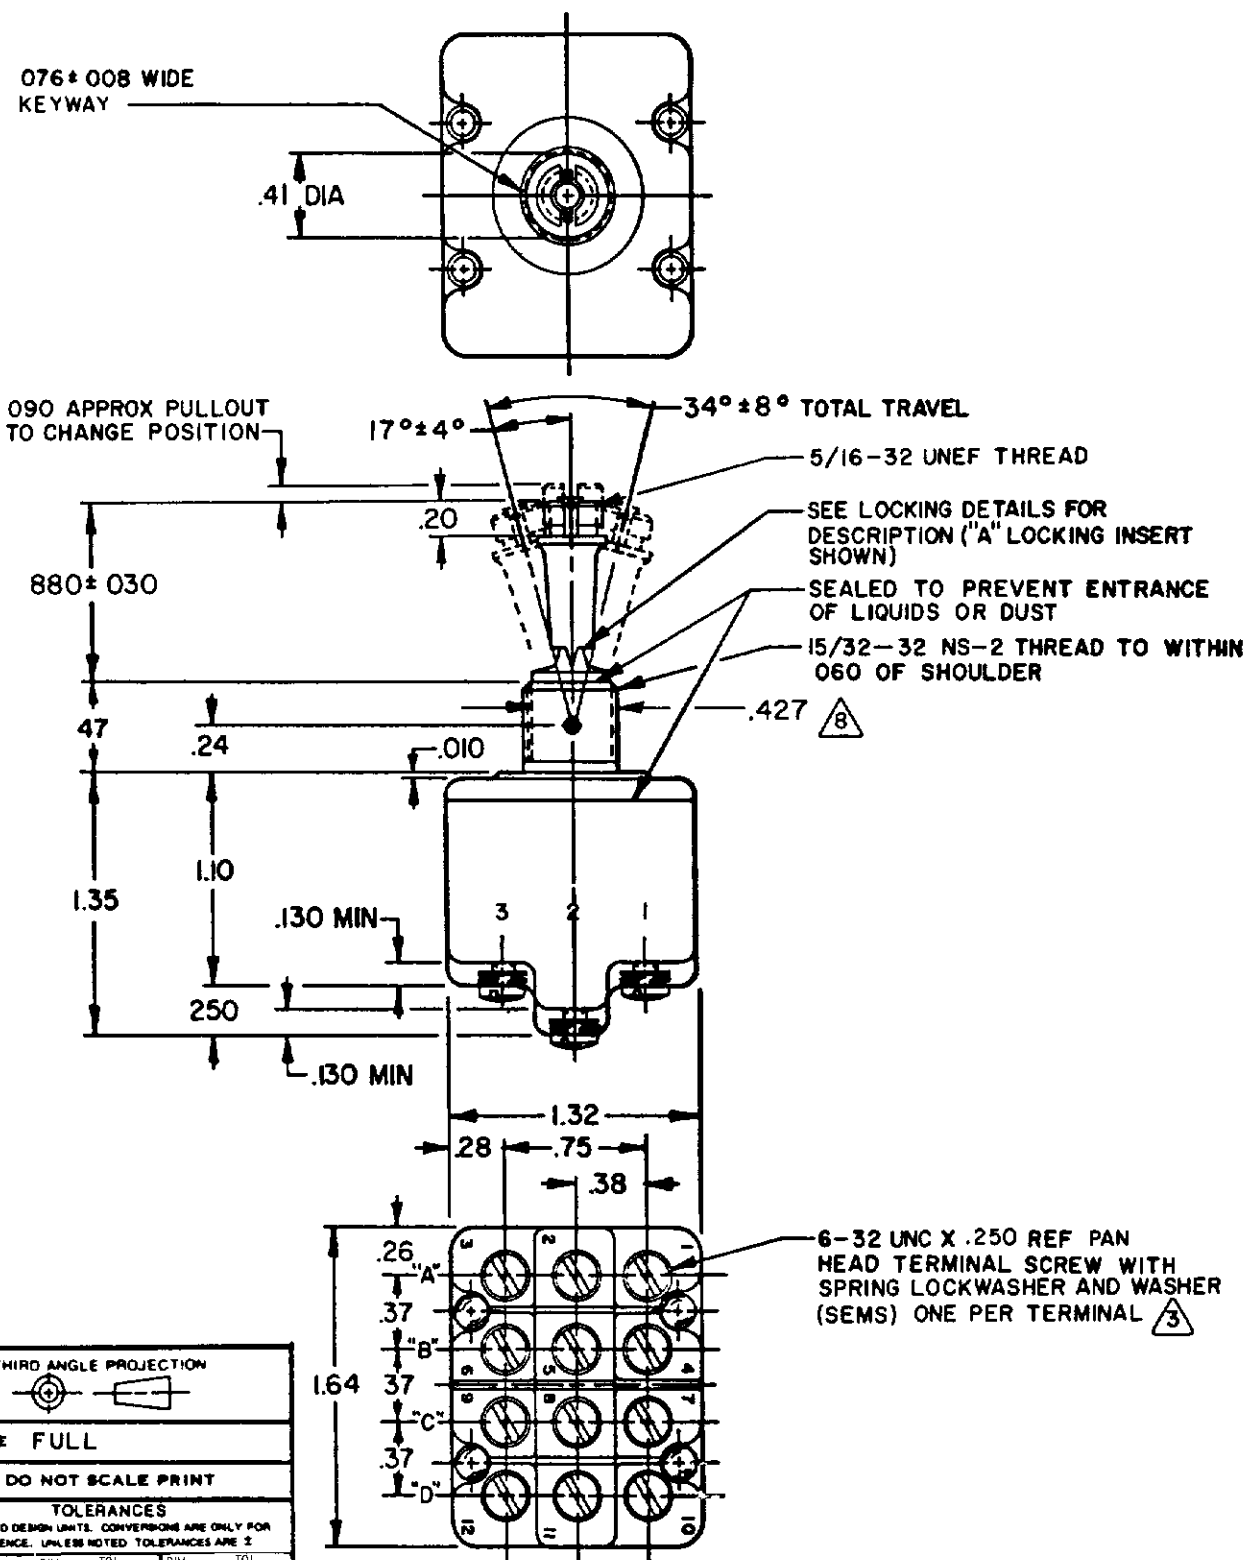


6-32 UNC X .250 REF PAN
HEAD TERMINAL SCREW WITH
SPRING LOCKWASHER AND WASHER
(SEMS) ONE PER TERMINAL 

	CATALOG LISTING △6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			CURRENT CAPACITY (AMPS)								
			KEYWAY SIDE (1-2,4-5 7-8,10-11)	CENTER (1-2,4-5 7-8,10-11)	OPPOSITE KEYWAY (2-3,5-6 8-9,11-12)	RESISTIVE LOAD DC VOLTS IACVOLTS			LAMP LOAD		INDUCTIVE LOAD			
						28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
	4TLI4I-1	A,B,D,E,F,G,H,J,K,L,M,N,P	ON	OFF	ON	20	.75	5	15	6	5	4	12	15
	4TLI4I-2	D,F,G	OFF	NONE	ON									
	4TLI4I-3	D,F,G	ON	NONE	ON									
	4TLI4I-2I	E,F,K,M	NONE	OFF	ON									
	4TLI4I-3I	E,F,K,M	NONE	ON	ON									
	4TLI4I-4	F	MOM OFF	NONE	ON	18	.75	.5	11	6	4	2	10	8
	4TLI4I-5	E,F,K,L,M,N	MOM ON	OFF	ON									
	4TLI4I-6	F	MOM ON	NONE	OFF									
	4TLI4I-7	E,L,N	MOM ON	OFF	MOM ON									
	4TLI4I-8	F	MOM ON	NONE	ON									
	4TLI4I-5I	E	NONE	ON	MOM ON									
	4TLI4I-6I	E	MOM ON	OFF	NONE									

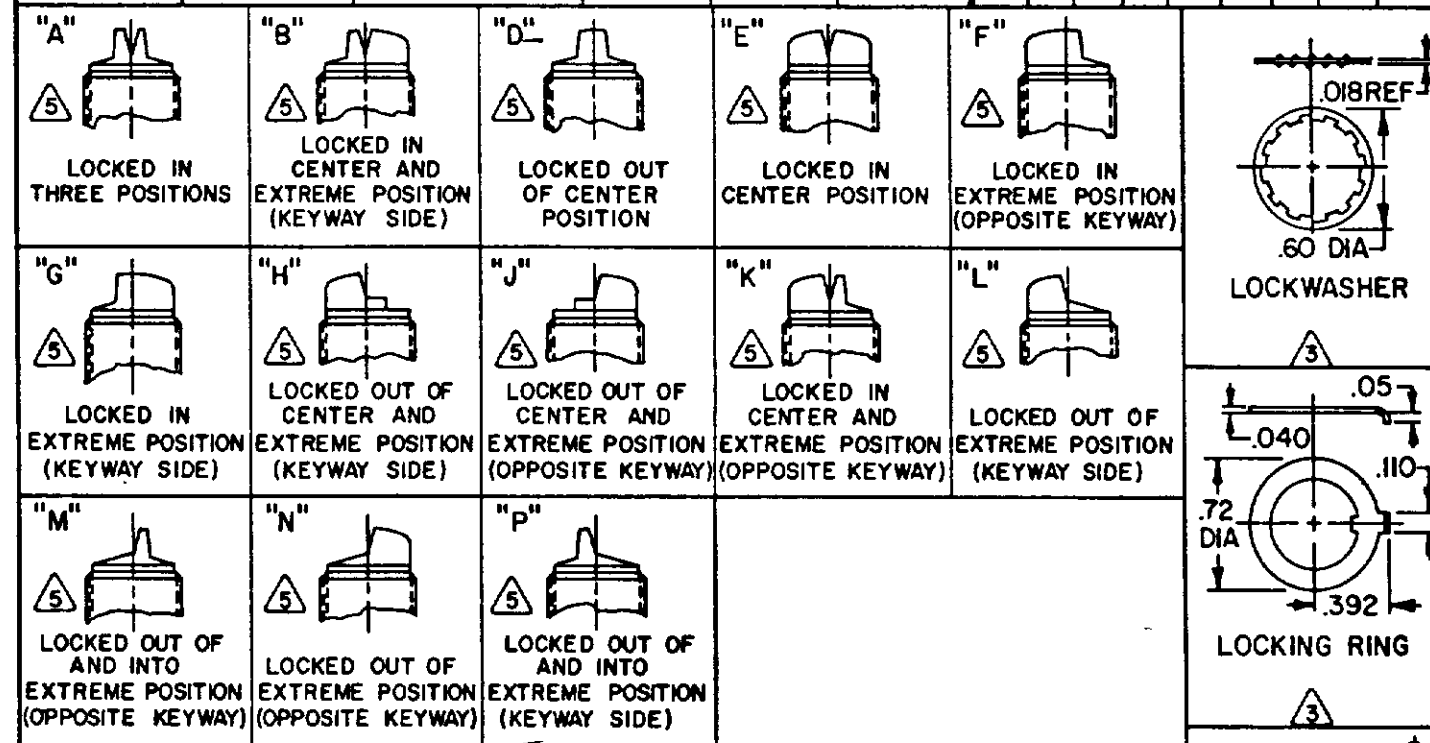

- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD
- 2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING MARKED ON SIDE OF SWITCH
- 3 - FURNISHED UNASSEMBLED
- 4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
- 5 - KEYWAY SHOWN ON LEFT SIDE
- 6 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS
- 7 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS
- 8 - FROM BOTTOM OF KEYWAY TO MAJOR DIA OF 15/32 THREAD



HEX NUT (2)

4TL141 SERIES CHART 1

ISSUE	1
-------	---

REVISIONS	
A	CO-81150
J A K	
19 JUN 95	

FORMTEK

[illegible]