


FED. MFG. CODE 91929


CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH


KEYWAY SIDE



CENTER







OPPOSITE KEYWAY





MAINTAINED POSITION

CURRENT CAPACITY (AMPS)

RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
DC VOLTS			AC VOLTS					
28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
18	.75	.5	11	6	4	2	10	8

LOCKWASHER $\triangle 3$ 

LOCKING RING /3



2X HEX NUT / 3

THIRD ANGLE PROJECTION



SCALE	FULL
-------	------

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE




ONE PLACE (. 0) $\pm .030$

TWO PLACE	(.00)	$\pm .015$
THREE PLACE	(.000)	$\pm .005$

THREE PLACE	(1.000)	1.000
ANGLES		±

WEIGHT 188

L192 10A 125, 250, 277 VAC
1/4HP 125 VAC
1/2HP 250, 277 VAC
3A 125 VAC "L"

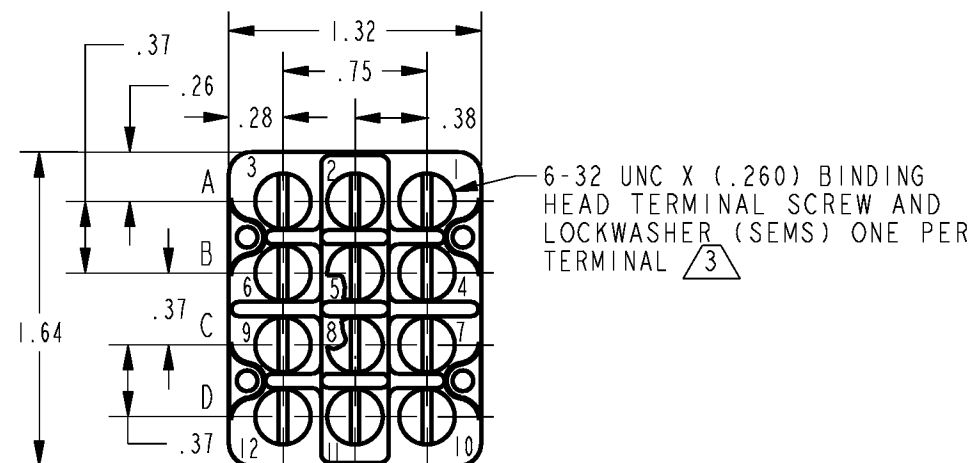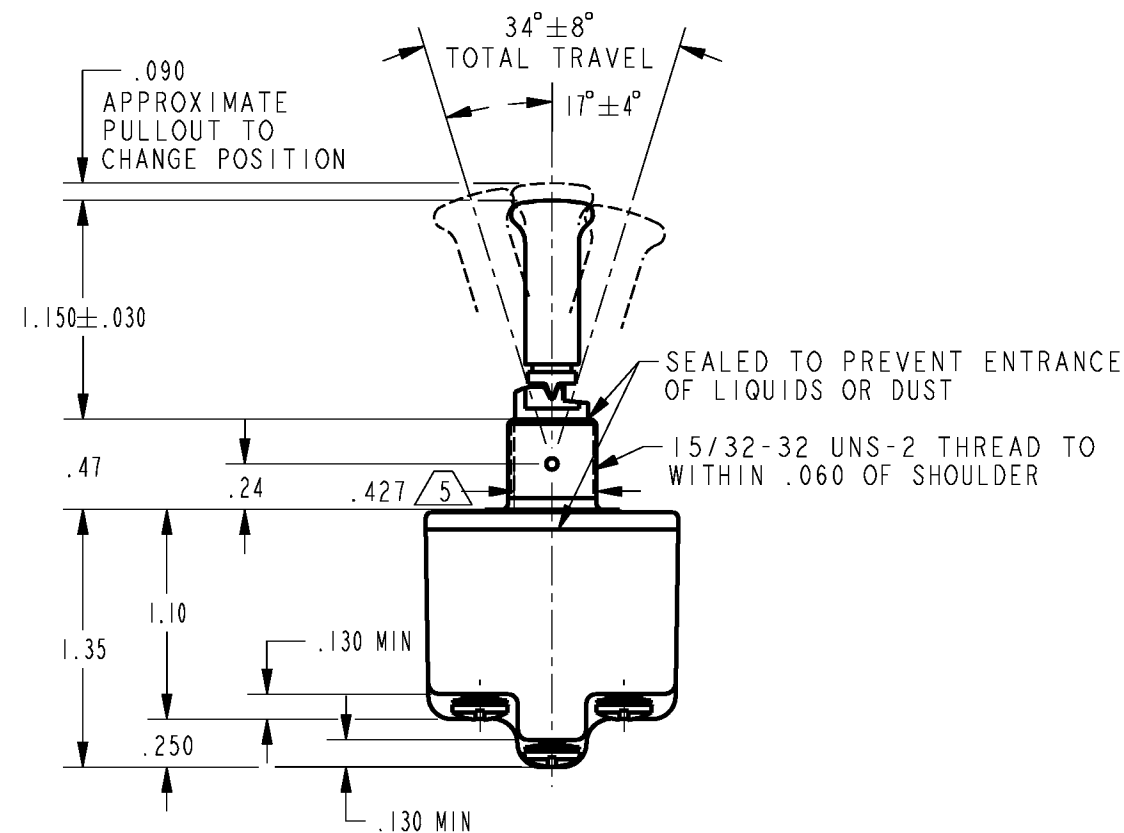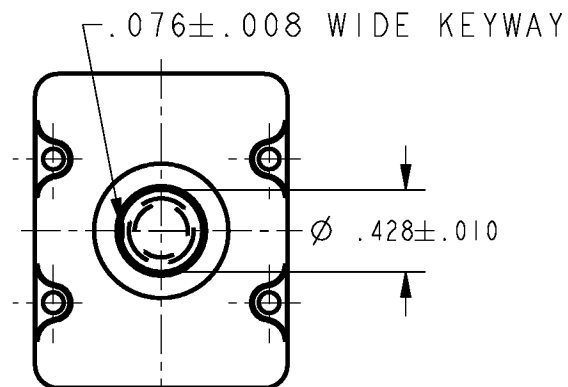

NOTES

1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160° F CONTINUOUSLY AT FULL RATED LOAD

2 - CIRCUIT DESIGNATION AND MICRO SWITCH CATALOG LISTING
^ MARKED ON SIDE OF SWITCH

3 MARKED ON SIDE OF SWITCH
FURNISHED UNASSEMBLED

4 - FOR TERMINAL COVER SEE MICRO SWITCH CATALOG LISTING 5PA9
5 - FROM BOTTOM OF KEYWAY TO MAJOR Ø OF 15/32 THREADS

ANSI Y14.5M-1982 APPLIES